


S = start of winding
F = finish of winding

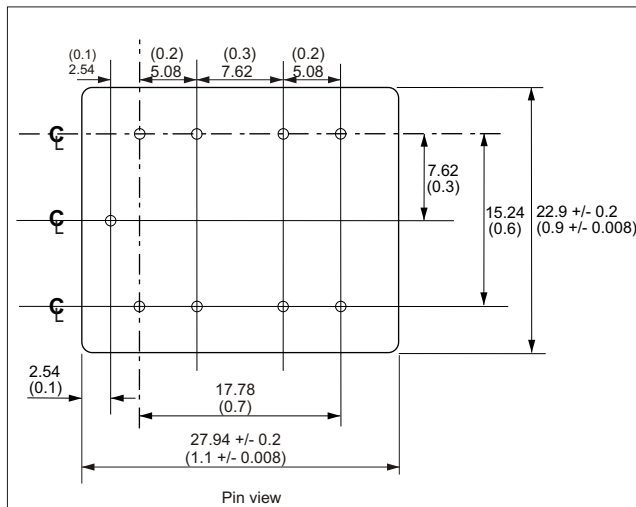


Tolerance on all dimensions in millimetres: +/- 0.1mm unless stated otherwise.
Inches shown in brackets. Tolerance on dimensions in inches: +/- 0.005"
Pin size: 0.7mm (0.0276")

Electrical characteristics:

Winding ratio: 1+1:2+2
DC resistance (+/- 15%):
Primaries: 10.3 + 10.3. Secondaries: 59.5 + 59.5
Impedance: primaries: 150 ohms + 150 ohms
 secondaries: 600 ohms + 600 ohms
Inductance, measured at 1kHz, 0.27V
(series equivalent circuit):
Primary: 125mH + 125mH (nominal)
Secondary: 500mH + 500mH (nominal)
Proof voltage: primaries to screen: 1kVrms
 screen to secondaries: 1kVrms
Frequency range: 30Hz - 35kHz +/- 1.5dB.
Power: 100mW @ 300Hz and 1mW @ 30Hz
Distortion: less than 1% T.H.D. 600 ohms 30Hz - 35kHz
measured at 0dBm. See page 2
Operating temperature range: 0 to +70°C
Storage temperature range: -25°C to +120°C
N.B. Do not pass DC through windings

Materials: all materials are UL94V-0 rated

Bobbin and box material: FR530
UL file number: E69578(M)
or 'Polyplastics Co. Ltd
Material name: 1140 A(C)
UL file no. E109088(M)
2-part epoxy resin type 3300A and 3300B
UL file number 218090
or Epoxylite EIP4728: UL file no. E143115
Core: class B (49% Ni) EE laminations
Winding wire: ECW. UL file no. E174837
Tape: 3M No. 56 polyester or equivalent




Unit 5, Oxonian Park, Langford Locks,
Kidlington, Oxfordshire. OX5 1FP
Tel: (01865) 855085 Fax: (01865) 855075
Website: www.oep.co.uk

DESCRIPTION	ISSUE	DATE	DRAWN	CHECKED	DRAWING NUMBER
Specification for A262A2E page 1 of 2	1	04/05/04	CS		A262A2E
	6	27/03/08	CS		
	7	04/07/12	CS		
	8	16/10/13	CS		


Scale: nts

All dimensions in mm unless stated otherwise


Insertion loss: source impedance 600R, level 0dBm, primaries in series, secondaries in series and loaded with 2320R

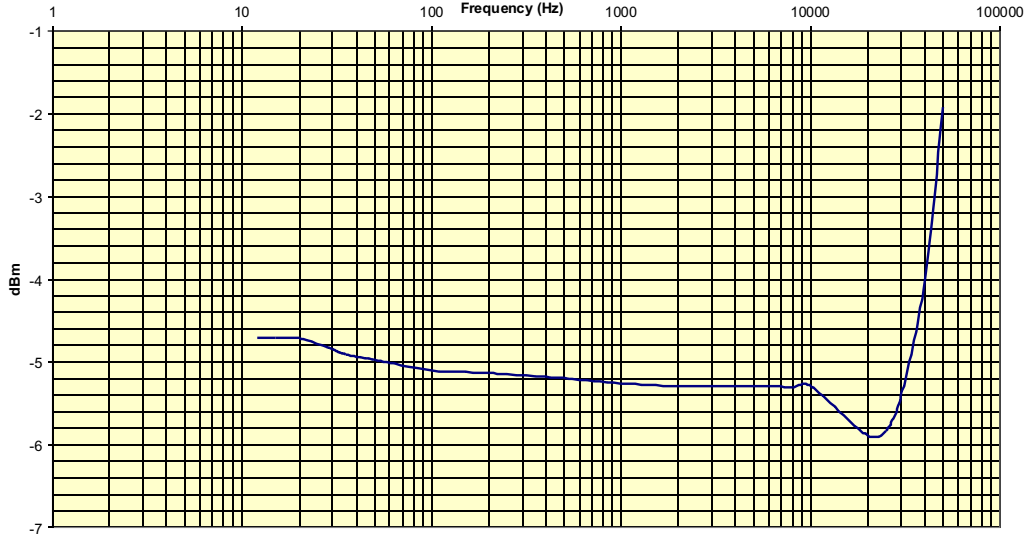



Return loss: source impedance 50R, level 0dBu, primary windings in series, secondaries in series loaded with 2320R

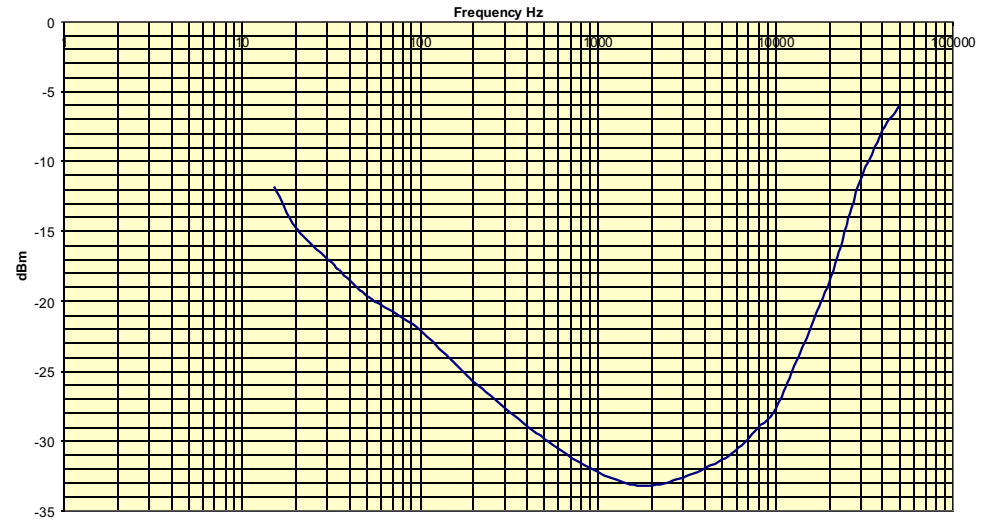

Frequency response: primary windings in series, source impedance: 600R, level: 0dBm, secondaries in series and loaded with 2320R

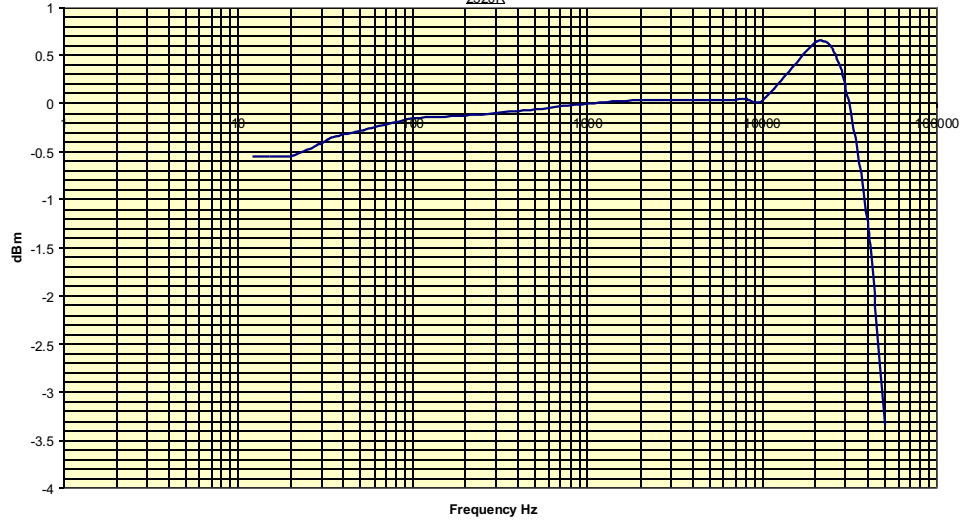

Distortion: primary windings in series, source impedance: 600R, level 0dBm, secondaries in series and loaded with 2320R

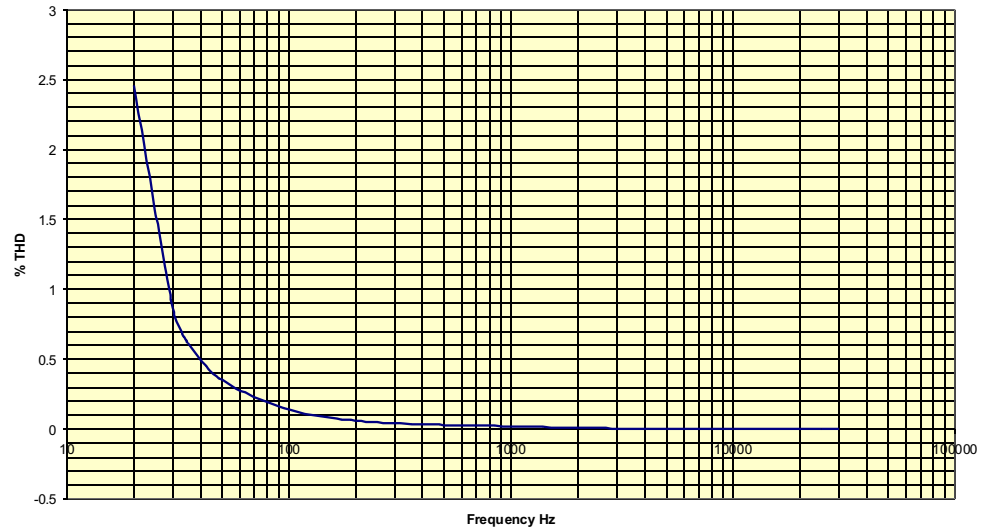

Unit 5, Oxonian Park, Langford Locks,
Kidlington, Oxfordshire. OX5 1FP
Tel: (01865) 855085 Fax: (01865) 855075
Website: www.oep.co.uk

DESCRIPTION	ISSUE	DATE	DRAWN	CHECKED	DRAWING NUMBER
Specification for A262A2E page 2 of 2	1	04/05/04	CS		A262A2E
	6	27/03/08	CS		
	7	04/07/12	CS		
	8	16/10/13	CS		

Scale:nts

All dimensions in mm unless stated otherwise

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [oep](#) manufacturer:

Other Similar products are found below :

[016608F](#) [PT4](#) [PT8](#) [E187B](#) [PT42E](#) [TF048](#) [Z1604](#) [P1200](#)