

Rev	Date	Modification	Dessine	Visa
A				
B				
C				
D				


DS44698

22 Allée du Clos des Charmes
Z.A. Les Portes de la Forêt
77090 COLLECEN
Tel : 01-60-37-55-55
Fax : 01-60-17-12-00



DATA SHEET 44698
EI 30x18

Ech: 1:1		Finition: Tolérance générale:	
Matériau:		Finition: Tolérance générale:	
Dessiné par: ROUSSELCH		Date: 18/05/2004	
Visa: J.P.M.			





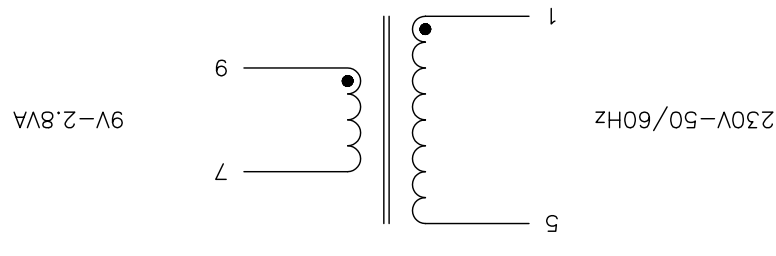


44698

① ta 40/B
② 230V 50/60Hz (1-5)
③ 9V 2.8VA (7-9)
④

EN 60950
UL 504
VDE
CE
www.mytra.com

N°22

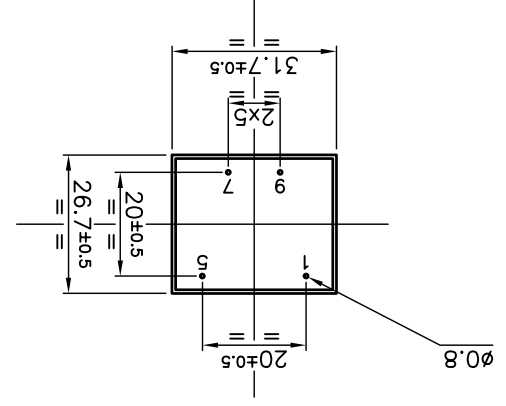

SAFETY ISOLATING TRANSFORMER

POWER : 2.8VA
INPUT VOLTAGE : 230V
FREQUENCY : 50/60Hz
NOMINAL OUTPUT VOLTAGE : 9V

INHERENTLY SHORT CIRCUIT PROOF TRANSFORMER
IP00
UL94V0
OPERATING TEMPERATURE : -25°C to 40°C
STORAGE TEMPERATURE : -25°C to 85°C
INSULATION CLASS (IEC85) : B
INHERENT PROTECTION

STANDARDS :
UL506 (Fichier E111078)
CSA 22-2 (Fichier E111078)
VDE (Fichier Ref:1398300)
EN60950 (Fichier Ref:1398300)
EN61558-1 (Fichier Ref:1398300)
EN61558-2-6 (Fichier Ref:1398300)
CE

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [myrra manufacturer](#):

Other Similar products are found below :

[47254](#) [44678](#) [47216](#) [47133](#) [47124](#) [44381](#) [44697](#) [44376](#) [47153](#) [47121](#) [48024](#) [44379](#) [74095](#) [47210](#) [45051](#) [44307](#) [44441](#) [47201](#) [45068](#)
[44301](#) [44193](#) [44320](#) [44373](#) [45066](#) [47136](#) [47152](#) [47206](#) [44375](#) [45035](#) [44699](#) [44275](#) [45039](#) [45049](#) [45029](#) [44129](#) [44235](#) [47151](#) [48021](#)
[44660](#) [45037](#) [45069](#) [45074](#) [44302](#) [74060](#) [44382](#) [44060](#) [44132](#) [44248](#) [44278](#) [44378](#)