

WiFly click






1. Introduction

WiFly click carries RN-131, a standalone, embedded wireless LAN module. It allows vou to connect your devices to 802.11 b/a wireless networks. The module includes preloaded firmware which simplifies integration. The mikroBUS™ UART interface alone (RX, TX pins) is sufficient to establish a wireless data connection. Additional functionality is provided by RST, WAKE, RTSb and CTSb pins. The board uses a 3.3V power supply only.

2. Soldering the headers

Before using your click board™, make sure to solder 1x8 male headers to both left and right side of the board. Two 1x8 male headers are included with the board in the package.





Turn the board upside down so that the bottom side is facing you upwards. Place shorter pins of the header into the appropriate soldering pads.




Turn the board upward again. Make sure to align the headers so that they are perpendicular to the board, then solder the pins carefully.

mikroBUS™ socket. If all the

pins are aligned correctly,

push the board all the way

into the socket.




4. Essential features

The RN-131 module's firmware makes it easy to set up, scan for access points, associate, authenticate and connect the WiFly click to a Wi-Fi network. The module is controlled with simple ASCII commands. It has a multitude of networking applications built in: DHCP, UDP, DNS, ARP, ICMP, TCP, HTTP client, and FTP client. Data rates of up to 1 Mbps are achievable through UART. It contains both an onboard chip antenna and a connector for an external antenna...





5. Schematic

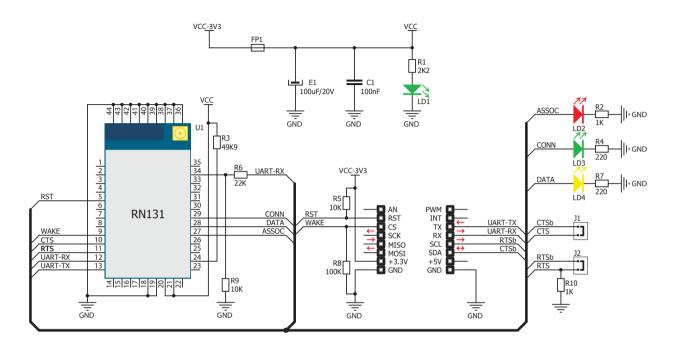

8. Code examples

Once you have done all the necessary preparations, it's time to get your click board $^{\mathbb{N}}$ up and running. We have provided examples for mikro $\mathbb{C}^{\mathbb{N}}$, mikro \mathbb{B} asic $^{\mathbb{N}}$ and mikro \mathbb{P} ascal $^{\mathbb{N}}$ compilers on our **Libstock** website. Just download them and you are ready to start.



9. Support

MikroElektronika offers free tech support [www.mikroe.com/support] until the end of the product's lifetime, so if something goes wrong, we're ready and willing to help!



6. Dimensions



	mm	mils
LENGTH	57.15	2250
WIDTH	25.4	1000
HEIGHT*	5.33	210

^{*} without headers

7. SMD jumpers

J1 and J2 jumper positions are for enabling or disabling the functionality of RTS and CTS control pins. To put them to use, solder Zero ohm resistors



10. Disclaimer

MikroElektronika assumes no responsibility or liability for any errors or inaccuracies that may appear in the present document. Specification and information contained in the present schematic are subject to change at any time without notice.

Copyright @ 2015 MikroElektronika. All rights reserved.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for WiFi Development Tools - 802.11 category:

Click to view products by MikroElektronika manufacturer:

Other Similar products are found below:

YSAEWIFI-1 SKY65981-11EK1 QPF7221PCK-01 SIMSA915C-Cloud-DKL SIMSA433C-Cloud-DKL ISM43903-R48-EVB-E

QPF4206BEVB01 RN-G2SDK SKY85734-11EK1 SKY85735-11EK1 ENW49D01AZKF ESP-LAUNCHER MIKROE-2336

EVAL_PAN1760EMK 3210 EVAL_PAN1026EMK ATWINC1500-XPRO 2471 DM990001 WRL-13711 2999 ATWILC3000-SHLD

DFR0321 TEL0118 3213 DFR0489 SLWSTK-COEXBP WRL-13804 DEV-13907 UP-3GHAT-A20-0001 3405 TEL0078 2680 2702

2821 3044 3606 3653 3654 4000 4172 4178 4201 4264 4285 CS-ANAVI-25 CS-ANAVI-26 CS-ANAVI-23 CS-ANAVI-24 CS-ANAVI-28