

MIKROE

mikromedia 
for STM32 CAPACITIVE FPI

USER MANUAL

Thank you for choosing Mikroë!

We present you the ultimate multimedia solution for embedded development.

Elegant on the surface, yet extremely powerful on the inside, we have designed it to inspire outstanding achievements.

And now, it's all yours.

Enjoy premium.

MIKROE

Time-saving embedded tools



Pick your own look

Identical in the back, choices up front.

- 1 mikromedia 3 for STM32 Capacitive FPI with bezel
- 2 mikromedia 3 for STM32 Capacitive FPI with frame

mikromedia 3 for STM32 CAPACITIVE FPI is a compact development board designed as a complete solution for the rapid development of multimedia and GUI-centric applications. By featuring a 3.5" capacitive touch screen driven by the powerful graphics controller that can display the 24-bit color palette [16.7 million colors], along with a DSP-powered embedded sound CODEC IC, represents a perfect solution for any type of multimedia application.

At its core, there is a powerful 32-bit STM32F407VGT6 or STM32F207VGT6 microcontroller [referred to as "host MCU" in the following text], produced by STMicroelectronics, which provides sufficient processing power for the most demanding tasks, ensuring fluid graphical performance and glitch-free audio reproduction.

However, this development board is not limited to multimedia-based applications only: mikromedia 3 for STM32 CAPACITIVE FPI ["mikromedia 3 FPI" in the following text] features USB, digital motion sensor, battery charging functionality, SD-Card reader, and much more, expanding its use beyond the multimedia. Two compact-sized mikroBUS Shuttle connectors represent the most

distinctive connectivity feature, allowing access to a huge base of Click boards™, growing on a daily basis.

The usability of mikromedia 3 FPI does not end with its ability to accelerate the prototyping and application development stages: it is designed as the complete solution which can be implemented directly into any project, with no additional hardware modifications required. We offer two types of mikromedia 3 for STM32 CAPACITIVE FPI boards. The first one has a TFT display with a bezel around it and is ideal for handheld devices. The other mikromedia 3 for STM32 CAPACITIVE FPI board has a TFT display with a metal frame, and four corner mounting holes that enable simple installation in various kinds of industrial appliances. Each option can be used in smart home solutions, as well as wall panel, security and automotive systems, factory automation, process control, measurement, diagnostics and many more. With both types, a nice casing is all that you need to turn the mikromedia 3 for STM32 CAPACITIVE FPI board into a fully functional design.

This manual, in its entirety, showcases just one option of mikromedia 3 for STM32 CAPACITIVE FPI for illustration purposes. The manual applies to both options.

NOTE

1. Key microcontroller features

At its core, mikromedia 3 for STM32 CAPACITIVE FPI uses the **STM32F407VGT6** or **STM32F207VGT6** MCU.

STM32F407VGT6 is the 32-bit RISC ARM® Cortex®-M4 core. This MCU is produced by STMicroelectronics, featuring a dedicated floating-point unit (FPU), a complete set of DSP functions, and a memory protection unit (MPU) for elevated application security. Among many peripherals available on the host MCU, key features include:

- 1 MB of Flash memory
- 192 + 4 KB of SRAM (including 64KB of Core Coupled Memory)
- Adaptive real-time accelerator (ART Accelerator™) allowing 0-wait state execution from Flash memory
- Operating frequency up to 168 MHz
- 210 DMIPS / 1.25 DMIPS/MHz (Dhrystone 2.1)

For the complete list of MCU features, please refer to the STM32F407VGT6 [datasheet](#)

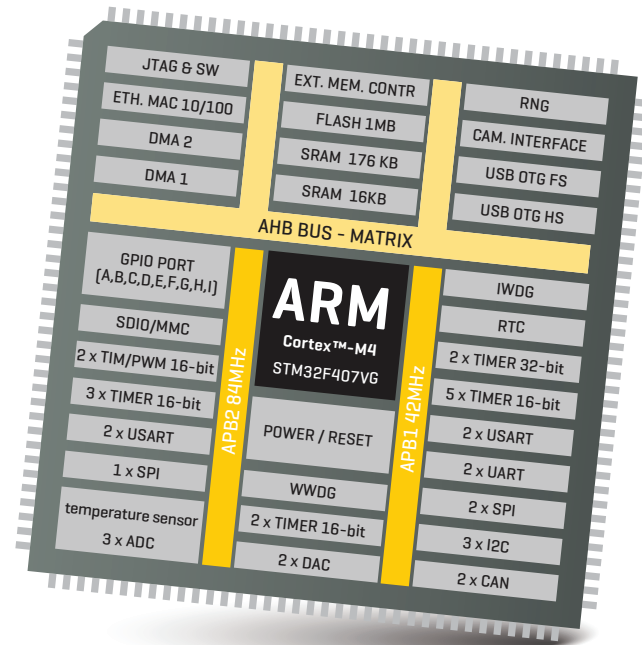


Figure 1: STM32F407VGT6 MCU block schematic

STM32F207VGT6 is the 32-bit RISC ARM® Cortex®-M3 core. This MCU is produced by STMicroelectronics, featuring a dedicated floating-point unit (FPU), a complete set of DSP functions, and a memory protection unit (MPU) for elevated application security. Among many peripherals available on the host MCU, key features include:

- 1 MB Flash memory
- 128 + 4 KB of SRAM
- Adaptive real-time accelerator (ART Accelerator™) allowing 0-wait state execution from Flash memory
- Operating frequency up to 120 MHz
- 150 DMIPS / 1.25 DMIPS/MHz (Dhrystone 2.1)

For the complete list of MCU features, please refer to the STM32F207VGT6 [datasheet](#)

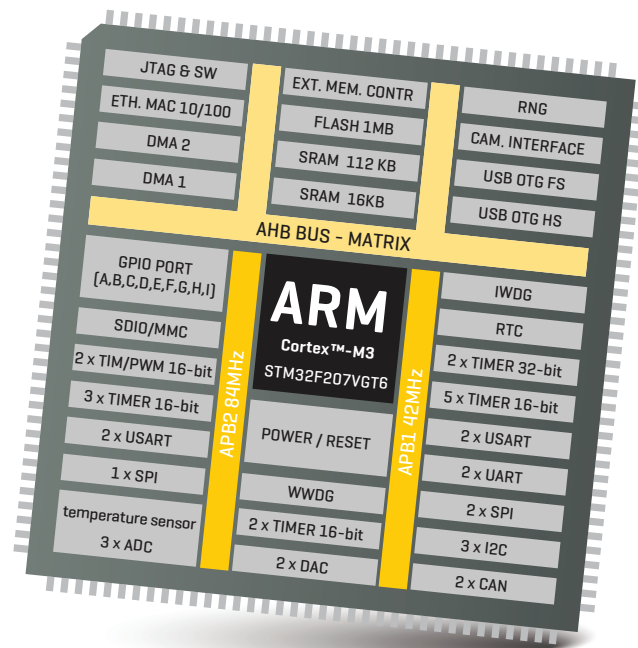


Figure 2: STM32F207VGT6 MCU block schematic

1.1 Microcontroller programming/debugging

The host MCU can be programmed and debugged over the JTAG/SWD compatible 2x5 pin header **(1)**, labeled as PROG/DEBUG. This header allows an external programmer (e.g. CODEGRIP or mikroProg) to be used.

Programming the microcontroller can also be done by using the bootloader which is preprogrammed into the device by default. All the informations about the bootloader software can be found on the following page:

www.mikroe.com/mikrobootloader

1.2 MCU reset

The board is equipped with the Reset button **(2)**, which is located on the back side of the board. It is used to generate a LOW logic level on the microcontroller reset pin.

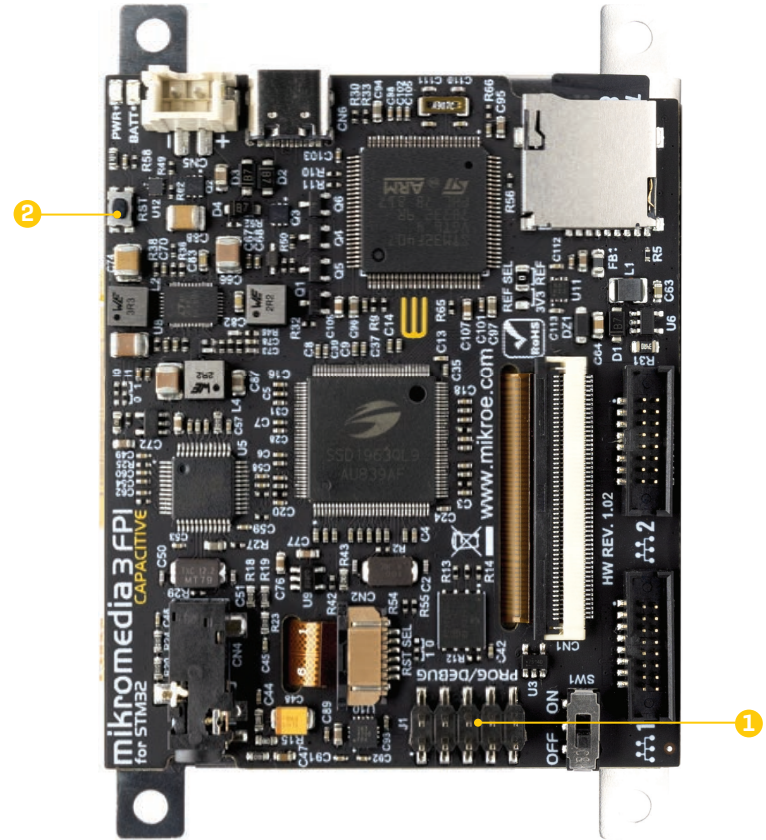


Figure 3: Front and back partial view



CODEGRIP
USB/WIFI PROGRAMMER & DEBUGGER

- POWER
- USB-LINK
- NET-LINK
- ACTIVE
- DATA

CODEGRIP

MIXADE

CODEGRIP ADAPT
16-pin e for Atmel Cortex-Dvbg
J2

Mikromedia 3 FPL
CAPACTIVE

For STM32

www.mikroe.com

HW REV. 1.92

US #1 PROG/DEBUG

OFF ON

SW1

2. Power supply unit

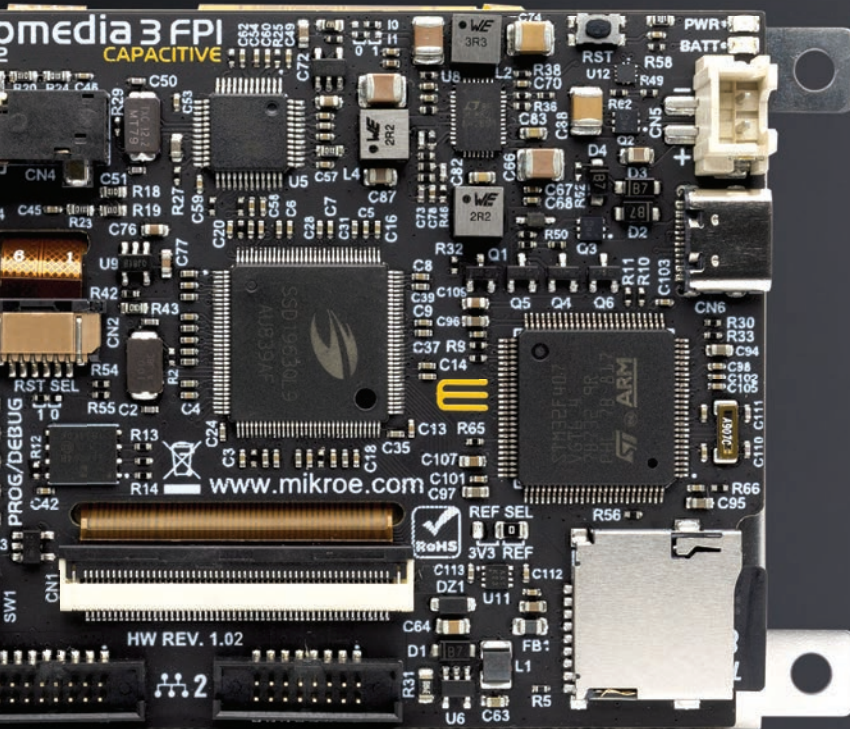


Figure 4: Power supply unit view

The power supply unit [PSU] provides clean and regulated power, necessary for proper operation of the mikromedia 3 FPI development board. The host MCU, along with the rest of the peripherals, demands regulated and noise-free power supply. Therefore, the PSU is carefully designed to regulate, filter, and distribute the power to all parts of mikromedia 3 FPI. It is equipped with two different power supply inputs, offering all the flexibility that mikromedia 3 FPI needs, especially when used on the field or as an integrated element of a larger system. In the case when multiple power sources are used, an automatic power switching circuit with predefined priorities ensures that the most appropriate will be used.

The PSU also contains a reliable and safe battery charging circuit, which allows a single-cell Li-Po/Li-Ion battery to be charged. Power OR-ing option is also supported, providing an uninterrupted power supply [UPS] functionality when an USB power source is used in combination with the battery.

2.1 Detailed description

The PSU has a very demanding task of providing power for the host MCU and all the peripherals onboard, as well as for the externally connected peripherals. One of the key requirements is to provide enough current, avoiding the voltage drop at the output. Also, the PSU must be able to support multiple power sources with different nominal voltages, allowing switching between them by priority. The PSU design is based on LTC3586, a highly integrated power management and battery charger IC that includes a current limited switching PowerPath manager. LTC3586 also enables battery charging over a USB connection. This IC transmits nearly all of the power available from the USB port to the load with minimal loss and heat. The PowerPath switching regulator and battery charger inside LTC3586 communicate to ensure that the input current never violates the USB specifications.

2.2 Voltage reference

The MCP1501, a high-precision buffered voltage reference from Microchip is used to provide a very precise voltage reference with no voltage drift. It can be used for various purposes: the most common uses include voltage references for A/D converters, D/A converters, and comparator peripherals on the host MCU. The MCP1501 can provide up to 20mA, limiting its use exclusively to voltage comparator applications with high input impedance. Depending on the specific application, either 3.3V from the power rail, or 2.048V from the MCP1501 can be selected. An onboard SMD jumper labeled as REF SEL offers two voltage reference choices:

- REF: 2.048V from the high-precision voltage reference IC
- 3V3: 3.3V from the main power supply rail

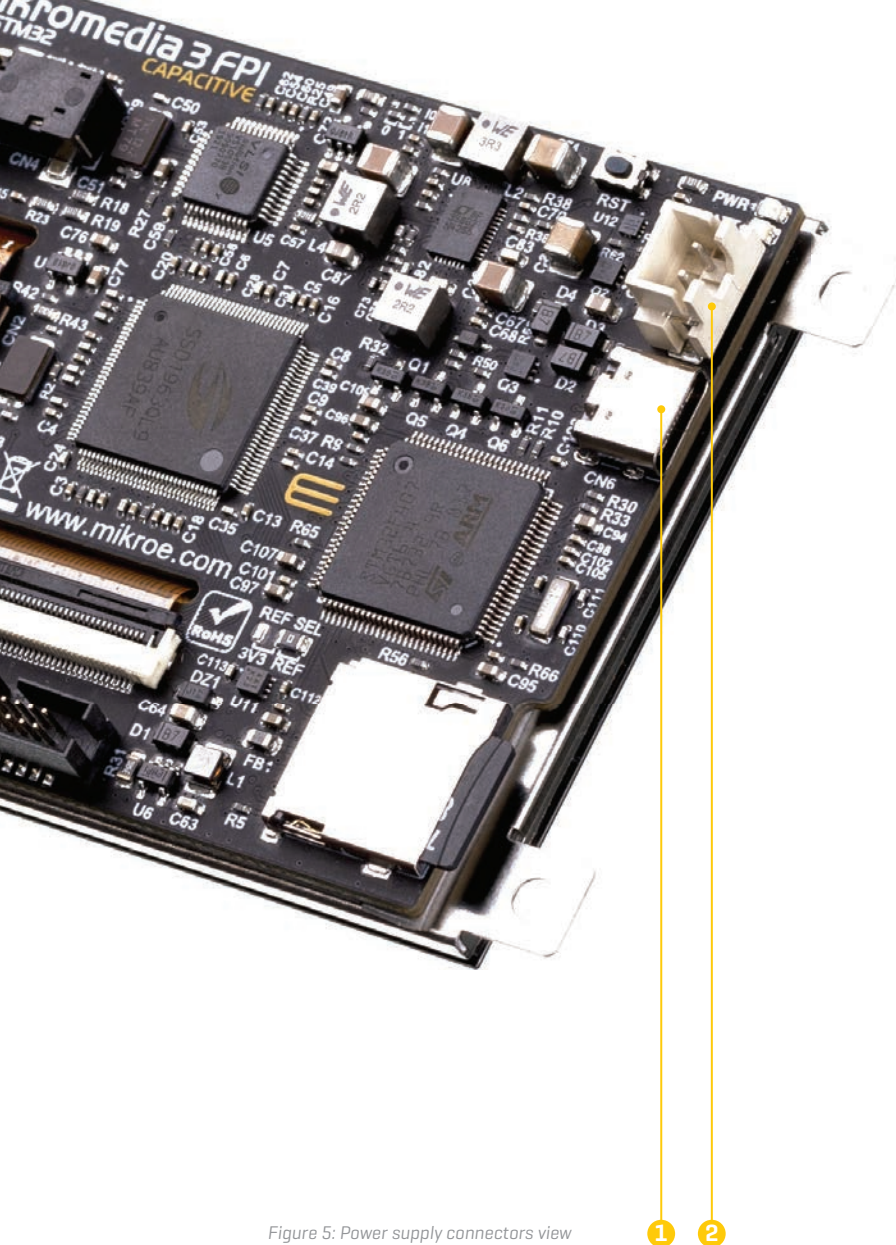


Figure 5: Power supply connectors view

2.3 PSU connectors

As explained, the advanced design of the PSU allows two types of power sources to be used, offering unprecedented flexibility: when powered by a Li-Po/Li-ION battery, it offers an ultimate degree of autonomy. Power is not an issue even if it is powered over the USB cable. It can be powered over the USB-C connector, using power supply delivered by the USB HOST [i.e. personal computer], USB wall adapter, or a battery power bank.

There are two power supply connectors available, each with its unique purpose:

- CN6: USB-C connector **[1]**
- CN5: Standard 2.5mm pitch XH battery connector **[2]**

2.3.1 USB-C connector

The USB-C connector [labeled as CN6] provides power from the USB host [typically PC], USB power bank, or USB wall adapter. When powered over the USB connector, the available power will depend on the source capabilities.

Maximum power ratings, along with the allowed input voltage range in the case when the USB power supply is used, are given in the table *Figure 6*:

USB Power Supply				
Input Voltage [V]		Output Voltage [V]	Max Current [A]	Max Power [W]
MIN	MAX	3.3	1	3.3
4.4	5.5	5	0.8	4
		3.3 & 5	0.6 & 0.6	4.98

Figure 6: USB power supply table

When using a PC as the power source, the maximum power can be obtained if the host PC supports the USB 3.2 interface, and is equipped with USB-C connectors. If the host PC uses the USB 2.0 interface, it will be able to provide the least power, since only up to 500 mA [2.5W at 5V] is available in that case. Note that when using longer USB cables or USB cables of low quality, the voltage may drop outside the rated operating voltage range, causing unpredictable behavior of the development board.

NOTE If the USB host is not equipped with the USB-C connector, a Type A to Type C USB adapter may be used [included in the package].

2.3.2 Li-Po/Li-Ion XH battery connector

Powering mikromedia 3 FPI by a single-cell Li-Po/Li-Ion battery allows complete autonomy, allowing it to be used in some very specific situations: hazardous environments, agricultural applications, etc.

The battery connector is a standard 2.5mm pitch XH connector. It allows a range of single-cell Li-Po and Li-Ion batteries to be used. The PSU of

mikromedia 3 FPI offers the battery charging functionality, from the USB connector. The battery charging circuitry of the PSU manages the battery charging process, allowing the optimal charging conditions and longer battery life. The charging process is indicated by BATT LED indicator, located on the front of mikromedia 3 FPI.

The PSU module also includes the battery charger circuit. Charging current is set to 300mA.

Maximum power ratings along with the allowed input voltage range when the battery power supply is used, are given in the table Figure 7:

Battery Power Supply				
Input Voltage [V]		Output Voltage [V]	Max Current [A]	Max Power [W]
MIN	MAX	3.3	1	3.3
3.5	4.2	5	0.8	4
		3.3 & 5	0.6 & 0.6	4.98

Figure 7: Battery power supply table

Using low-quality USB hubs, and too long or low-quality USB cables, may cause a significant USB voltage drop, which can obstruct the battery charging process.


NOTE

2.4 Power redundancy and uninterrupted power supply [UPS]

The PSU module supports power supply redundancy: it will automatically switch to the most appropriate power source if one of the power sources fails or becomes disconnected. The power supply redundancy also allows for an uninterrupted operation [i.e. UPS functionality, the battery will still provide power if the USB cable is removed, without resetting mikromedia 3 FPI during the transition period].

2.5 Powering up the mikromedia 3 FPI board

After a valid power supply source is connected in our case with a single-cell Li-Po/Li-Ion battery **[1]**, mikromedia 3 FPI can be powered ON. This can be done by a small switch at the edge of the board, labeled as SW1 **[2]**. By switching it ON, the PSU module will be enabled, and the power will be distributed throughout the board. A LED indicator labeled as PWR indicates that the mikromedia 3 FPI is powered ON.

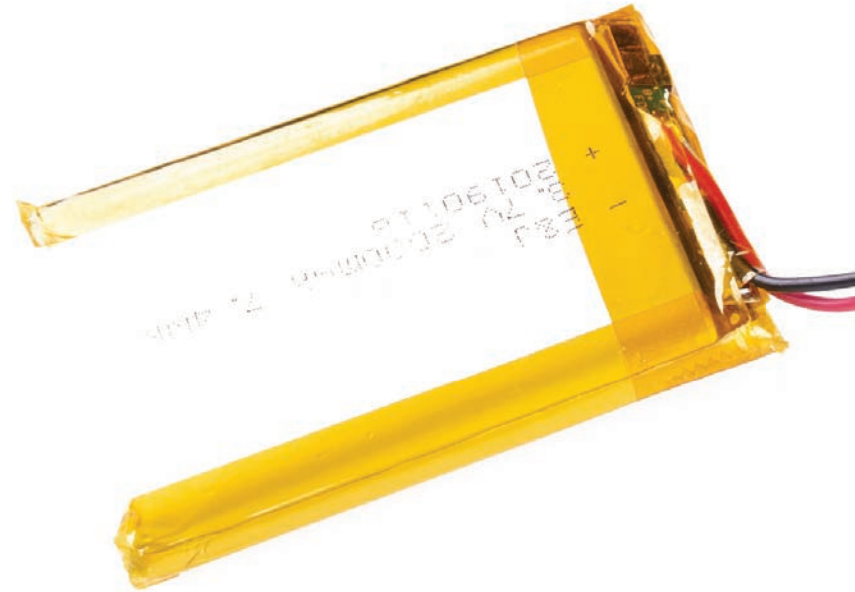

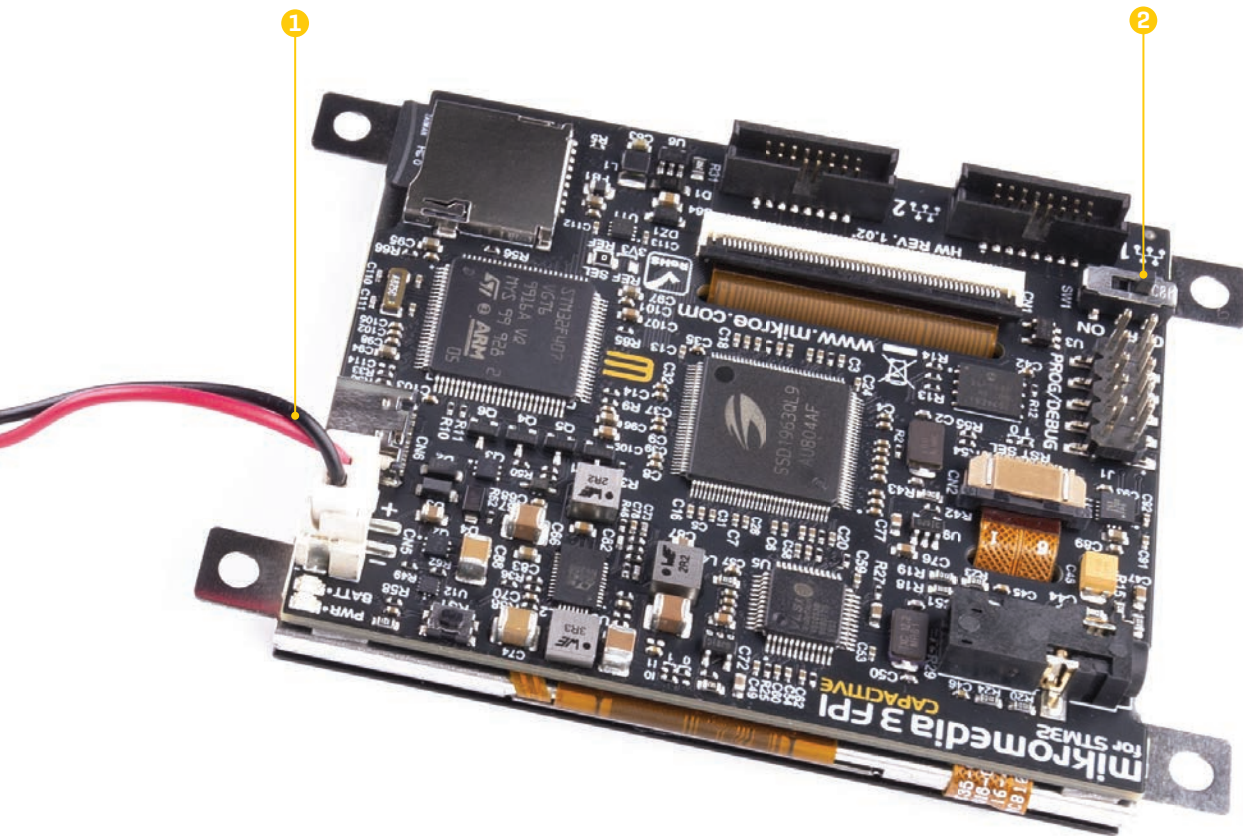


Figure 8: Battery power supply connection

3. Capacitive display

A high-quality 3.5" TFT true-color display with a capacitive touch panel is the most distinctive feature of the mikromedia 3 FPI. The display has a resolution of 320 by 240 pixels, and it can display up to 16.7M of colors [24-bit color depth]. The display of mikromedia 3 FPI features a reasonably high contrast ratio of 500:1, thanks to 6 high-brightness LEDs used for the backlighting.

The display module is controlled by the SSD1963 [1] graphics driver IC from Solomon Systech. This is a powerful graphics coprocessor, equipped with 1215KB of frame buffer memory. It also includes some advanced features such as the hardware accelerated display rotation, display mirroring, hardware windowing, dynamic backlight control, programmable color and brightness control, and more.

The capacitive multi-touch panel allows the development of interactive applications, offering a touch-driven control interface. The touch panel controller uses the I2C interface for the communication with the host controller. This advanced

multi-touch panel controller supports gestures, including zoom and swipe in all four directions.

Equipped with high-quality 3.5" display [2] and the multi-touch controller that supports gestures, mikromedia 3 FPI represents a very powerful hardware environment for building various GUI-centric Human Machine Interface [HMI] applications.



1 Figure 9: Display and SSD1963 view

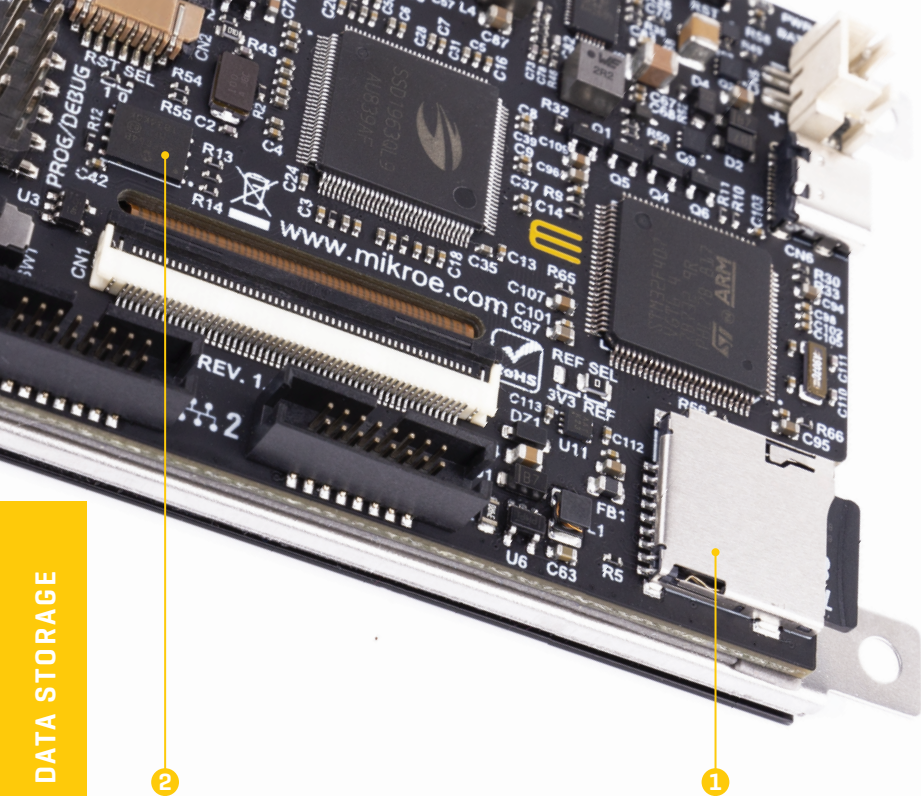


Figure 10: microSD card slot view

4. Data storage

The mikromedia 3 FPI development board is equipped with two types of storage memory: with a microSD card slot and a Flash memory module.

4.1 microSD card slot

The microSD card slot **[1]** allows storing large amounts of data externally, on a microSD memory card. It uses the Secure digital input/output interface (SDIO) for communication with the MCU. The microSD card detection circuit is also provided on the board. The microSD card is the smallest SD Card version, measuring only 5 x 11 mm. Despite its small size, it allows tremendous amounts of data to be stored on it. In order to read and write to the SD Card, a proper software/firmware running on the host MCU is required.

4.2 External flash storage

mikromedia 3 FPI is equipped with the SST26VF064B Flash memory **[2]**. The Flash memory module has a density of 64 Mbits. Its storage cells are arranged in 8-bit words, resulting in 8Mb of non-volatile memory in total, available for various applications. The most distinctive features of the SST26VF064B Flash module are its high speed, very high endurance, and very good data retention period. It can withstand up to 100,000 cycles, and it can preserve the stored information for more than 100 years. It also uses the SPI interface for the communication with the MCU.

5. Connectivity

mikromedia 3 FPI includes support for USB(HOST/DEVICE). Besides that, it also offers two standardized mikroBUS™ Shuttle connectors. It is a considerable upgrade for the system, as it allows interfacing with the huge base of Click boards™.

5.1 USB

The host MCU is equipped with the USB peripheral module, allowing simple USB connectivity. USB [Universal Serial Bus] is a very popular industry standard that defines cables, connectors, and protocols used for communication and power supply between computers and other devices. mikromedia 3 FPI supports USB as HOST/DEVICE modes, allowing the development of a wide range of various USB-based applications. It is equipped with the USB-C connector, which offers many advantages, compared to earlier types of USB connectors [symmetrical design, higher current rating, compact size, etc].

The USB mode selection is done using a monolithic controller IC. This IC provides Configuration Channel [CC] detection and indication functions. To set up mikromedia 3 FPI as the USB HOST, the USB_PSW pin should be set to a LOW logic level [0] by the MCU. If set to a HIGH logic level [1], mikromedia 3 FPI acts as a DEVICE. While in HOST mode, mikromedia 3 FPI provides

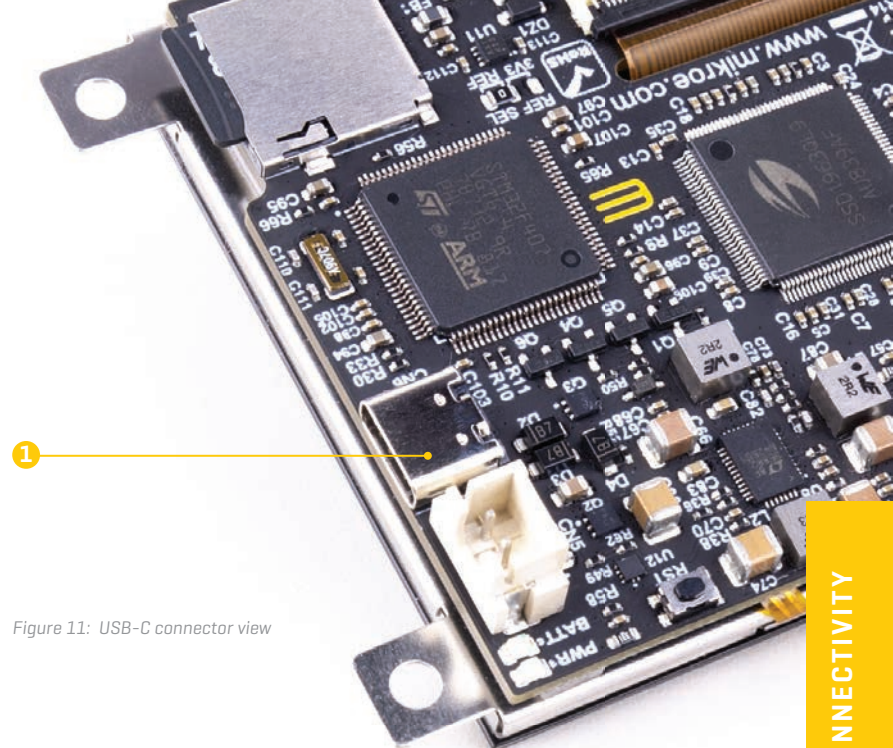


Figure 11: USB-C connector view

power over the USB-C connector [1] for the attached DEVICE. The USB_PSW pin is driven by the host MCU, allowing the software to control the USB mode.

The USB ID pin is used to detect the type of the device attached to the USB port, according to the USB OTG specifications: the USB ID pin connected to GND indicates a HOST device, while the USB ID pin set to a high impedance state [HI-Z] indicates that the connected peripheral is a DEVICE.

When mikromedia 3 FPI is working in USB HOST mode, it must not be mounted to another USB HOST [such as PC].

NOTE

For more information about mikroBUS™ Shuttle extension board and Shuttle click, please visit web pages:

www.mikroe.com/mikrobus-shuttle

www.mikroe.com/shuttle-click

For additional information about the mikroBUS™, please visit the official web page at www.mikroe.com/mikrobus

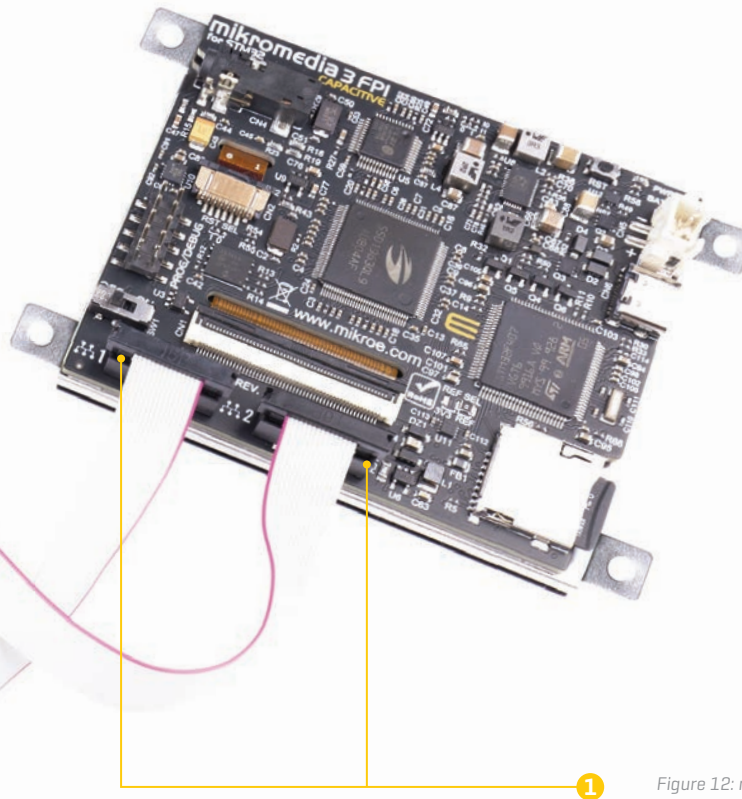


Figure 12: mikromedia 3 FPI connected to mikroBUS Shuttle view


6. Sound-related peripherals

mikromedia 3 FPI features powerful VS1053B IC. It is an Ogg Vorbis/MP3/AAC/WMA/FLAC/WAV/MIDI audio decoder, and a PCM/IMA ADPCM/Ogg Vorbis encoder, both on a single chip. It features a powerful DSP core, high-quality A/D and D/A converters, stereo headphones driver capable of driving a 30Ω load, zero-cross detection with the smooth volume change, bass and treble controls, and much more.

6.1 Audio CODEC

Resource-demanding and complex audio processing tasks can be offloaded from the host MCU by utilizing a dedicated audio CODEC IC, labeled as VS1053B **[1]**. This IC supports many different audio formats, commonly found on various digital audio devices. It can encode and decode audio streams independently while performing DSP-related tasks in parallel. The VS1053B has several key features that make this IC very popular choice when it comes to audio processing.

By offering high-quality hardware compression [encoding], the VS1053B allows the audio to be recorded taking up much less space compared to the same audio information in its raw format. In combination with high-quality ADCs and DACs, headphones driver, integrated audio equalizer, volume control, and more, it represents an all-around solution for any type of audio application. Along with the powerful graphics processor, the VS1053B audio processor completely rounds-up the multimedia aspects of the mikromedia 3 FPI development board. The mikromedia 3 FPI board is equipped with the 3.5mm four-pole headphones jack **[2]**, allowing to connect a headset with a microphone.

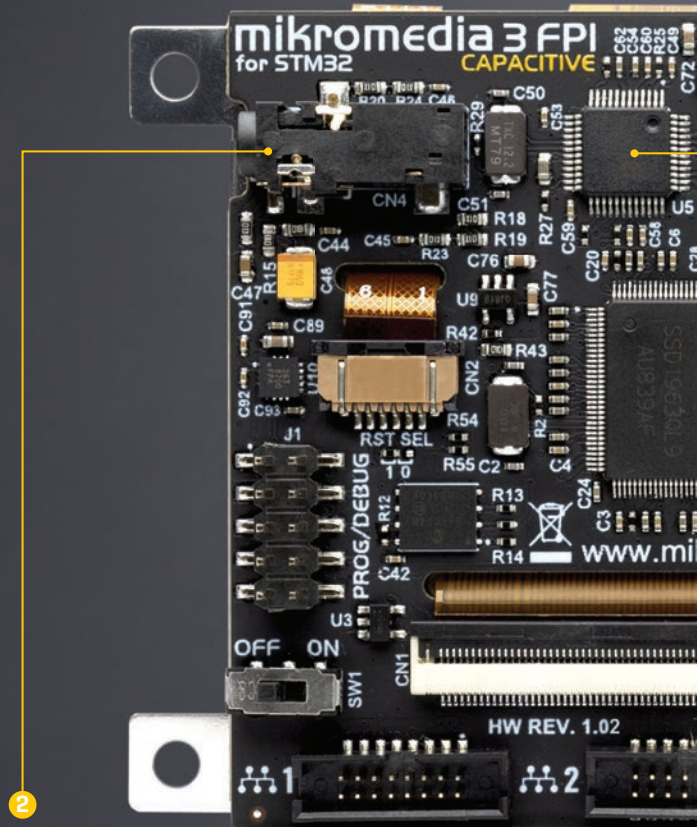

7. Sensors and other peripherals

A set of additional onboard sensors and devices adds yet another layer of usability to the mikromedia 3 FPI development board.

7.1 Digital motion sensor

The FXOS8700CQ, an advanced integrated 3-axis accelerometer and 3-axis magnetometer, can detect many different motion-related events, including the orientation event detection, freefall detection, shock detection, as well as tap, and double-tap event detection. These events can be reported to the host MCU over two dedicated interrupt pins, while the data transfer is performed over the I2C communication interface. The FXOS8700CQ sensor can be very useful for display orientation detection. It can also be used to turn mikromedia 3 FPI into a complete 6-axis e-compass solution.

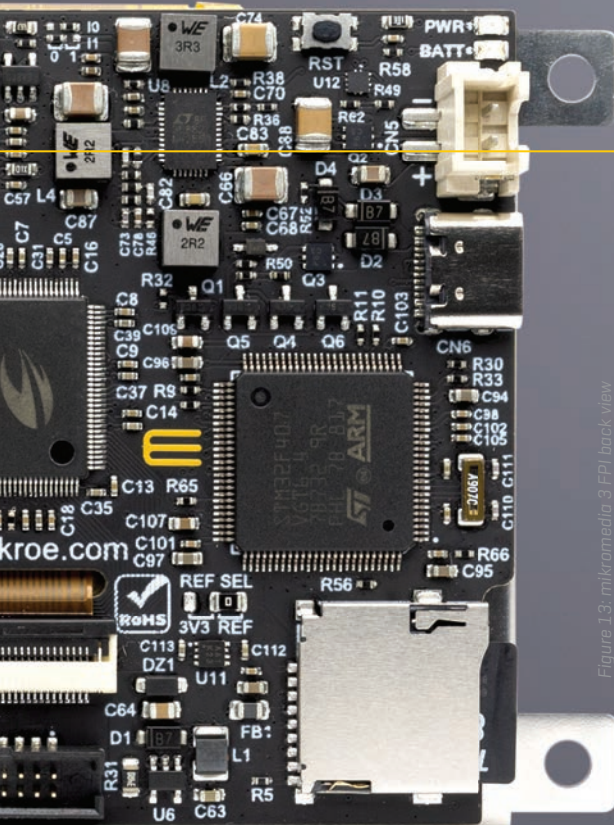


Figure 13: mikromedia 3 FPI back view

1

RAPID DEVELOPMENT OF
MULTIMEDIA AND GUI-CENTRIC
APPLICATIONS



7°

Belgrade

19 November
MONDAY



TUE

WED

THU

0°

1°

7°

What's Next?

You have now completed the journey through each and every feature of mikromedia 3 for STM32 CAPACITIVE FPI development board. You got to know its modules and organization. Now you are ready to start using your new board. We are suggesting several steps which are probably the best way to begin.

1 COMPILERS

Easy programming, clean interface, powerful debugging, great support - our compilers come in three different flavors: mikroC PRO for ARM, mikroBASIC PRO for ARM and mikroPASCAL PRO for ARM, offering a complete rapid embedded development solution for these 3 major programming languages.

www.mikroe.com/compilers/compilers-arm

2 PROJECTS

Once you have chosen your compiler, and since you already got the board, you are ready to start writing your first projects. We have equipped our compilers with dozens of examples that demonstrate the use of each and every feature of the mikromedia 3 for STM32 CAPACITIVE FPI development board. This makes an excellent starting point for future custom projects. Just load the example, read well commented code, and see how it works on hardware.

3 COMMUNITY

We invite you to join thousands of users of Mikroe development tools. You will find useful projects and tutorials and get help from a large user community. If you want to download free projects and libraries, or share your own code, please visit the Libstock website. With user profiles, you can get to know other programmers, and subscribe to receive notifications on their code.

www.libstock.mikroe.com

4 SUPPORT

Mikroe offers free Tech Support to the end of its life span, so if anything goes wrong, we are ready and willing to help. We know how important it is to be able to rely on someone in the moments when we are stuck with our projects for any reason, or facing a deadline. This is why our Support Department, as one of the pillars upon which our company is based, now also offers the Premium Technical Support to business users, ensuring even shorter time-frame for solutions. www.mikroe.com/support

DISCLAIMER

All the products owned by MikroElektronika are protected by copyright law and international copyright treaty. Therefore, this manual is to be treated as any other copyright material. No part of this manual, including product and software described herein, must be reproduced, stored in a retrieval system, translated or transmitted in any form or by any means, without the prior written permission of MikroElektronika. The manual PDF edition can be printed for private or local use, but not for distribution. Any modification of this manual is prohibited.

MikroElektronika provides this manual 'as is' without warranty of any kind, either expressed or implied, including, but not limited to, the implied warranties or conditions of merchantability or fitness for a particular purpose.

MikroElektronika shall assume no responsibility or liability for any errors, omissions and inaccuracies that may appear in this manual. In no event shall MikroElektronika, its directors, officers, employees or distributors be liable for any indirect, specific, incidental or consequential damages [including damages for loss of business profits and business information, business interruption or any other pecuniary loss] arising out of the use of this manual or product, even if MikroElektronika has been advised of the possibility of such damages. MikroElektronika reserves the right to change information contained in this manual at any time without prior notice, if necessary.

HIGH RISK ACTIVITIES

The products of MikroElektronika are not fault – tolerant nor designed, manufactured or intended for use or resale as on – line control equipment in hazardous environments requiring fail – safe performance, such as in the operation of nuclear facilities, aircraft navigation or communication systems, air traffic control, direct life support machines or weapons systems in which the failure of Software could lead directly to death, personal injury or severe physical or environmental damage ['High Risk Activities']. MikroElektronika and its suppliers specifically disclaim any expressed or implied warranty of fitness for High Risk Activities.

TRADEMARKS

The MikroElektronika name and logo, the MikroElektronika logo, mikroC, mikroBasic, mikroPascal, mikroProg, mikromedia, Fusion, Click boards™ and mikroBUS™ are trademarks of MikroElektronika. All other trademarks mentioned herein are property of their respective companies.

All other product and corporate names appearing in this manual may or may not be registered trademarks or copyrights of their respective companies, and are only used for identification or explanation and to the owners' benefit, with no intent to infringe.

Copyright © MikroElektronika, 2019, All Rights Reserved.

MIKROE

Time-saving embedded tools

If you want to learn more about our products, please visit our website at www.mikroe.com

If you are experiencing some problems with any of our products or just need additional information, please place your ticket at www.mikroe.com/support

If you have any questions, comments or business proposals, do not hesitate to contact us at office@mikroe.com



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Display Modules](#) category:

Click to view products by [MikroElektronika](#) manufacturer:

Other Similar products are found below :

[P6171DPR-DC-U](#) [P6191PR-DC-U-V3](#) [17978](#) [20135](#) [RL0F0007000A8GDAASA00](#) [MIKROMEDIA 3 FOR PIC32MZ CAPACITIVE FPI](#)
[RL0F00101000JGDAASA00](#) [1500CSH](#) [MOD-OLED-128x64](#) [ULCD-104D](#) [ULCD-104DCT](#) [GEN4-ULCD-43DCT-HR](#) [GEN4-ULCD-70P4](#)
[11769](#) [MIKROMEDIA FOR DSPIC33](#) [MIKROMEDIA FOR PIC24](#) [MIKROMEDIA FOR PIC32](#) [MIKROMEDIA FOR STELLARIS M3](#)
[MIKROMEDIA HMI 3.5 RES](#) [MIKROMEDIA HMI 5](#) [MIKROMEDIA PLUS FOR FT90X](#) [MIKROMEDIA PLUS FOR PIC32MX7 SHIELD](#)
[MIKROMEDIA PROTO SHIELD](#) [MIKROMEDIA 5 FOR TIVA SHIELD](#) [MIKROMEDIA CONNECT SHIELD](#) [MIKROMEDIA FOR ARM](#)
[MIKROMEDIA FOR PSOC5LP](#) [MIKROMEDIA HMI 4.3 UXB](#) [MIKROMEDIA HMI 5 RES](#) [MIKROMEDIA HMI 5 UXB](#) [MIKROMEDIA](#)
[HMI 7](#) [MIKROMEDIA HMI BREAKOUT BOARD](#) [16381](#) [17916](#) [18205](#) [18625](#) [PIS-0260](#) [GEN4-ULCD-70D](#) [2402630](#) [2402980](#) [2402981](#)
[2403461](#) [MIKROMEDIA HMI 7 UXB](#) [HMIDT351](#) [MIKROE-3158](#) [MIKROE-3159](#) [GEN4-ULCD-50D-SB-AR](#) [GEN4-ULCD-50D-CLB-SB-](#)
[AR](#) [PIS-0262](#) [GEN4-ULCD-50DT-SB-AR](#)