


DESIGNER'S KIT K1-ADTL+

Transformers

50Ω & 75Ω 0.50 to 1800 MHz

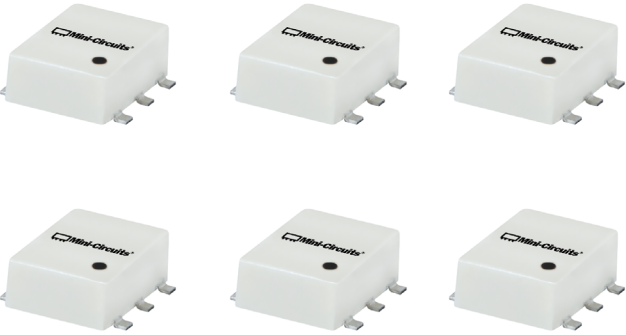

FEATURES

- Very wide bandwidth
- Balanced transmission line
- Excellent amplitude & phase unbalance
- Aqueous washable
- Low cost

MINI-CIRCUITS DESIGNER'S KITS
SPEED UP
THE SOLUTION



K1-ADTL+ ELECTRICAL SPECIFICATIONS


(5 models, 10 of each, 50 total)

Model	Ω Ratio	Frequency (MHz)	Insertion Loss*			Configuration
			3dB MHz	2dB MHz	1dB MHz	
ADTL1-12+	1	20-1200	—	20-1200	50-1000	G
ADTL1-18-75+	1	5-1800	—	5-1800	25-1200	G
ADTL1-4-75+	1	0.50-1000	0.50-1000	1-600	5-400	G
ADTL1-15-75+	1	10-1500	—	10-1500	30-1000	K
ADTL2-18+	2	30-1800	30-1800	—	100-1500	G


*Insertion loss is referenced to mid-band loss.
Protected under U.S. Patent 6,133,525

CONFIGURATIONS

G



K

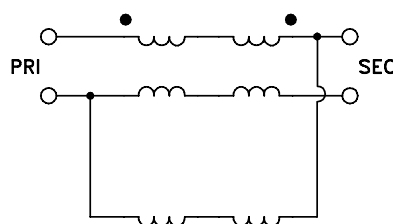

REV. A
ECO-009388
M108658
K1-ADTL+
210823

Mini-Circuits

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Audio Transformers / Signal Transformers](#) category:

Click to view products by [Mini-Circuits](#) manufacturer:

Other Similar products are found below :

[CX2041NLT](#) [MGPWT-00449-P](#) [PE-64961](#) [H1302FNLT](#) [H5008FNL](#) [H5012FNL](#) [H5020FNLT](#) [H5077NLT](#) [H5084FNLT](#)
[B78476A9558A003](#) [1812WBT2-4](#) [1879479-1](#) [HX2260FNL](#) [HX5014FNL](#) [EX2024FNL](#) [FL1066](#) [T1137NLT](#) [T3012NL](#) [PE-65812FNL](#) [PE-65848FNLT](#) [H1174FNL](#) [H1302FNL](#) [H5015FNL](#) [H5019EFNL](#) [H5062FNLT](#) [CX2047LNL](#) [MGPWT-00059-P](#) [MGPWT-00266-P](#) [MGPWT-00278-P](#) [MGPWT-00431-P](#) [TTC-100](#) [TTC-143-H](#) [TTC-5032-1](#) [BX1194WNLT](#) [HX1234NLT](#) [HX5008FNLT](#) [HX5019FNL](#) [HX5084NL](#) [3-1879385-5](#) [TX1263NLT](#) [4-1879391-0](#) [T1142NL](#) [HX6101FNL](#) [HX5084FNL](#) [HX1148NL](#) [HX5020FNLT](#) [HX5014FNLT](#) [T1124NL](#)
[1879732-1](#) [2-1879391-5](#)