


MINI-CIRCUITS DESIGNER'S KITS
SPEED UP
 THE SOLUTION!

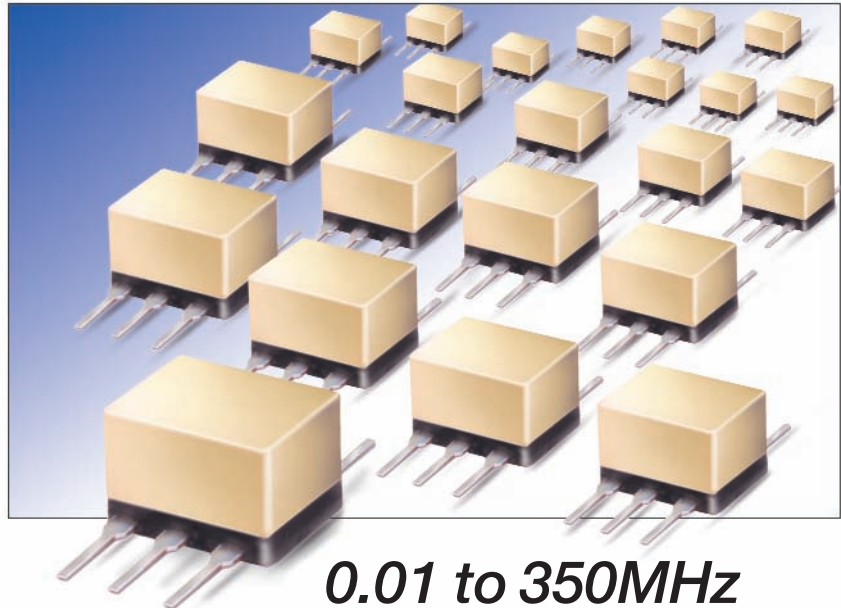

0.01 to 350MHz

T+ Features

- Wideband, 50 Ω
- Impedance ratios from 1:1 up to 16:1
- Input power 0.25W max.
- Very good return loss
- Plastic SM pkg.
- Low cost



All models are
RoHS compliant

Kit TK-5+ Electrical specifications of each model (11 models, 2 of each, 22 total)

Model	Ω Ratio	Frequency (MHz)	Insertion Loss*		
			3dB MHz	2dB MHz	1dB MHz
T1-1T+	1	0.08-200	0.08-200	0.15-150	0.2-80
T1-6T+	1	0.015-300	0.015-300	0.021-150	0.03-50
T2-1T+	2	0.07-200	0.07-200	0.1-100	0.5-50
T2.5-6T+	2.5	0.01-100	0.01-100	0.02-50	0.5-20
T3-1T+	3	0.05-250	0.05-250	0.1-200	0.5-70
T4-1+	4	0.20-350	0.20-350	0.35-300	2-100
T4-6T+	4	0.02-250	0.02-250	0.05-150	0.1-100
T5-1T+	5	0.3-300	0.3-300	0.6-200	5-100
T8-1T+	8	0.3-140	0.3-140	0.7-90	1-60
T13-1T+	13	0.3-120	0.3-120	0.7-80	5-20
T16-6T+	16	0.03-75	0.03-75	0.06-30	0.1-20

* Insertion loss is referenced to mid-band loss.



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Audio Transformers / Signal Transformers](#) category:

Click to view products by [Mini-Circuits](#) manufacturer:

Other Similar products are found below :

[CX2041NLT](#) [MGPWT-00449-P](#) [PE-64961](#) [H1302FNLT](#) [H5008FNL](#) [H5012FNL](#) [H5020FNLT](#) [H5077NLT](#) [H5084FNLT](#)
[B78476A9558A003](#) [1812WBT2-4](#) [1879479-1](#) [HX2260FNL](#) [HX5014FNL](#) [EX2024FNL](#) [FL1066](#) [T1137NLT](#) [T3012NL](#) [PE-65812FNL](#) [PE-65848FNLT](#) [H1174FNL](#) [H1302FNL](#) [H5015FNL](#) [H5019EFNL](#) [H5062FNLT](#) [CX2047LNL](#) [MGPWT-00059-P](#) [MGPWT-00266-P](#) [MGPWT-00278-P](#) [MGPWT-00431-P](#) [TTC-100](#) [TTC-143-H](#) [TTC-5032-1](#) [BX1194WNLT](#) [HX1234NLT](#) [HX5008FNLT](#) [HX5019FNL](#) [HX5084NL](#) [3-1879385-5](#) [TX1263NLT](#) [4-1879391-0](#) [T1142NL](#) [HX6101FNL](#) [HX5084FNL](#) [HX1148NL](#) [HX5020FNLT](#) [HX5014FNLT](#) [T1124NL](#)
[1879732-1](#) [2-1879391-5](#)