

EV1740EC-00A

3W High Efficiency Mono Class-D Audio Amplifer EV Board

The Future of Analog IC Technology

DESCRIPTION

The EV1740EC-00A is the evaluation board for the MP1740, a low-power mono BTL class-D audio amplifier. It is one of MPS's products in a very small WLCSP package, high efficiency, and full bridge output structure capable of delivering 3W into 4Ω speaker.

The gain of this module is set at 2V/V, and can be easily programmed by changing the input resistors.

ELECTRICAL SPECIFICATIONS

Parameter	Symbol Value		Units	
Supply Voltage	VIN	2.5 – 5.5	V	

FEATURES

- 3W Into 4Ω with 5 V VIN @ 10% THD+N
- Up to 90% Efficiency
- 2.5V~5.5V Operation from a Single Supply
- Module gain is set at 2V/V
- THD+N = 0.1% @ 1.8W, 5V, 4Ω
- Internal 250kHz Switching frequency
- Low Noise (53µV Typical) with 5V VCC
- 2mA Quiescent Current and 0.5µA Shutdown Current
- Internal thermal and short-circuit protection
- Internal depop circuitry

APPLICATIONS


- Wireless or Cellular Handsets-
- PDAs·
- Portable Audio


EV1740EC-00A EVALUATION BOARD




(L x W x H) 1.86" x 1.86" x 0.78" (4.72cm x 4.72cm x 2.0cm)

Board Number	IC Number	
EV1740EC-00A	MP1740	





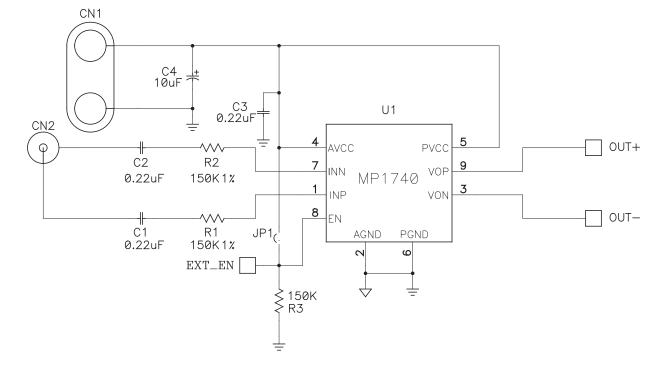


SCHEMATICS FOR ACTUAL APPLICATION

nes'

BILL OF MATERIALS FOR ACTUAL APPLICATION

Qty	Ref	Value	Description	Package	Manufacture	Part Number
2	C1, C2	0.22uF	Ceramic Cap, X7R, 16V	0603	muRata	GRM188R71C224KA01
1	C3	0.22uF	Ceramic Cap, X7R, 50V	0805	TDK	C2012X7R1H224K
1	C4	10uF	Electrolytic Cap, 50V	Radial	Rubycon	
2	R1, R2	150kΩ	Ceramic Res, 1%	0603	Yageo	RC0603FR-07150KL
1	R3	150kΩ	Ceramic Res, 5%	0603		0603SAJ01154TSE
1	U1		Amplifier	WLCSP	MPS	MP1740EC

SCHEMATICS FOR TEST

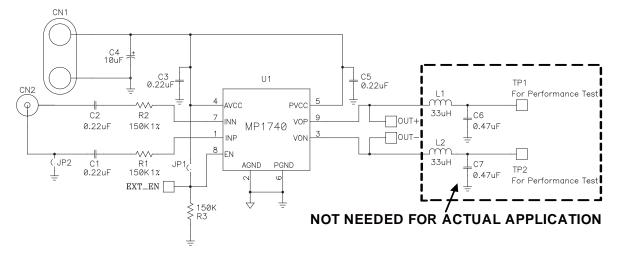

BILL OF MATERIALS FOR TEST

Qty	Ref	Value	Description	Package	Manufacture	Part Number
2	C1, C2	0.22uF	Ceramic Cap, X7R, 16V	0603	muRata	GRM188R71C224KA01
2	C3, C5	0.22uF	Ceramic Cap, X7R, 50V	0805	TDK	C2012X7R1H224K
1	C4	10uF	Electrolytic Cap, 50V	Radial	Rubycon	
2	C6, C7 ⁽¹⁾	0.47uF	Ceramic Cap, X7R, 16V	0603	muRata	GRM188R71C474KA88D
2	R1, R2	150kΩ	Ceramic Res, 1%	0603	Yageo	RC0603FR-07150KL
1	R3	150kΩ	Ceramic Res, 5%	0603		0603SAJ01154TSE
2	L1, L2 ⁽¹⁾	33uH	Inductor 1.3A	DS75LC	токо	DS75LC-B1047AS-330M
1	CN1		CONN/4PIN/0.100			
1	CN2		Phono Jack, Female	RCA Jack		
1	SP1		Speaker Connector/1CH			
1	JP1		JUMPER/2PIN			
1	JP2		JUMPER/2PIN			
1	U1		Amplifier	WLCSP	MPS	MP1740EC

Note:

1). These external components are used for performance test. For audio performance test, a LC low-pass filter is required even if the analyzer has a low-pass filter. They are not needed for actual application.

PRINTED CIRCUIT BOARD LAYOUT

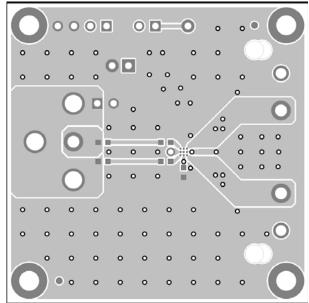


Figure 1—Top Layer

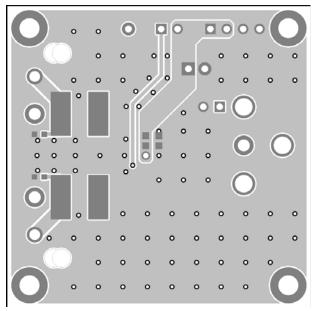


Figure 3—Bottom Layer

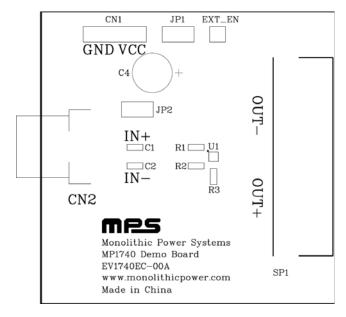


Figure 2—Top silk Layer

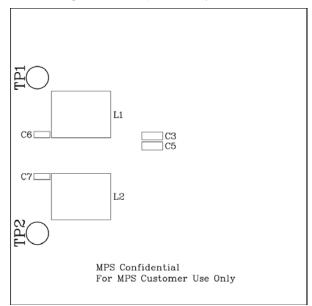


Figure 4—Bottom Silk Layer

QUICK START GUIDE

This board is set up from the factory for MP1740EC evaluation, which is a mono BTL low-power class-D audio amplifier (see Figure 5).

For audio performance test, the LC low-pass filter is required even if the analyzer has a low-pass filter. So please use TP1 and TP2 for output terminals (see Figure 6).

For more information, consult the MP1740 datasheet.


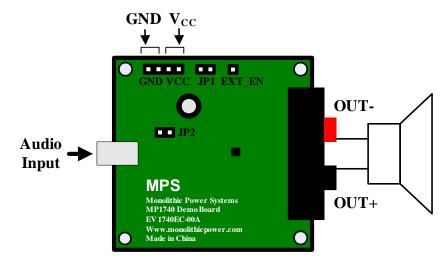


Figure 5. Connection for Mono BTL output (Top viewer)



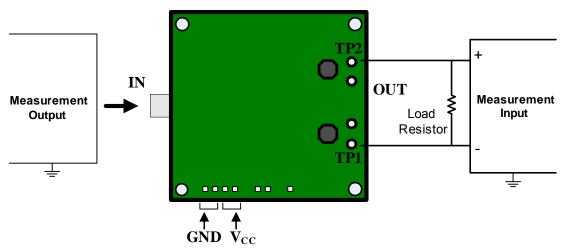

1. Setup Condition for 5V Operation

- a Ensure that all external power sources are set to off.
- b Adjust the power supply to 5V (do not turn on).
- c Connect the power supply to the VCC terminals.
- d Ensure that the audio input signal source level is set to minimum.
- e Connect the audio input signal source to the amplifier inputs.

- f Connect the outputs to the external speakers.
- g Ensure that the jumper JP1 is installed for active mode, or leave JP1 open and drive EN pin with the external TTL level logic.
- h Verify that no shunt is across jumper JP2 for differential input mode, it's installed only for singleended input.

2. Power on

- a Verify correct voltage and input polarity and set the external power supply to on
- b Adjust the input signal source level as needed. Then audio should be heard from the speaker.

NOTICE: The information in this document is subject to change without notice. Users should warrant and guarantee that third party Intellectual Property rights are not infringed upon when integrating MPS products into any application. MPS will not assume any legal responsibility for any said applications.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Audio IC Development Tools category:

Click to view products by Monolithic Power Systems manufacturer:

Other Similar products are found below :

1580/5171-DEMO LM4906MMBD LM4935RLEVAL LME49710NABD LME49740MABD LME49740NABD LME49860MABD LME49870MABD EVAL-AD1940AZ EVAL-ADAU1401AEBZ SRC4382EVM-PDK TLV320AIC36EVM-K TPA5052EVM TPA6136A2YFFEVM LM4562HABD LM4906LDBD LM4923LQBD LM4992SDBD LME49710MABD LME49713MABD LME49860NABD MAX98300EVKIT+WLP MAX9738EVKIT+ MAX98358EVSYS#WLP MAX9723DEVKIT+ EVAL-ADAV803EBZ MAX9890EVKIT+ MAX9709EVKIT LM4809MBD LM4674TLBD CDBWM8725-M-1 CDBWM8533-M-1 EV_ICS-40740-FX SDCK3 PIM524 MAX9723DEVCMODU+ DEV-17737 EVALAHNBIM69D130V01TOBO1 1063 TAS5756MDCAEVM TLV320ADC3101EVM-K TLV320AIC3007EVM-K TLV320AIC3105EVM-K TLV320AIC3253EVM-K TLV320DAC32EVM-PDK TPA2016D2EVM TPA2035D1EVM TPA2051D3YFFEVM TPA3107D2EVM TPA6120A2EVM