

DESCRIPTION

The EVQ3428A-L-00A Evaluation Board is designed to demonstrate the performances of MPS' MPQ3428A, which has excellent protection and can provide load with 12V/2A power from typical 3.3V input.

The MPQ3428A is a 600 kHz fixed frequency, high efficiency, wide input range, current mode boost converter with optional internal or external current sensing configuration for high integration and high power application. It features internally a 10mΩ, 24V power switch and a synchronous gate driver for high conversion efficiency. The MPQ3428A is available in a low profile 22-pin 3mmx4mm QFN package.

This board is configured for 12V application, the maximum output current is determined by current limit, permitted temperature rising and input voltage.

ELECTRICAL SPECIFICATION

Parameter	Symbol	Value	Units
Supply Voltage	V _{IN}	3 – 10	V
Output Voltage	V _{OUT}	12	V
Output Current	I _{OUT}	0– OCP ⁽¹⁾	A

Note:

- maximum output current depends on current limit, permitted temperature rising and input voltage.

FEATURES

- 3V-to-10V⁽²⁾ Wide Input Range
- Integrated 10mΩ Low-side Power FET
- SDR Driver for Synchronous Solution
- 19A Internal Switch Current Limit or External Programmable Input Current Limit
- Input Disconnect and Output SCP Protection
- External Soft-Start and Compensation for Higher Flexibility
- Programmable UVLO and Hysteresis
- < 1μA Shutdown Current
- Thermal Shutdown at 150°C
- Available in 3x4mm QFN-22 Package

Note:

- 3V-to-10V is suggested for this evaluation board, MPQ3428A IN pin can support up to 20V voltage.

APPLICATIONS

- Thunderbolt Interface
- Notebook and Tablet
- Bluetooth Audio
- Power Banks
- Electrical Cigarettes
- POS Systems

All MPS parts are lead-free, halogen free, and adhere to the RoHS directive. For MPS green status, please visit MPS website under Quality Assurance.

"MPS" and "The Future of Analog IC Technology" are Registered Trademarks of Monolithic Power Systems, Inc.


EVQ3428A-L-00A EVALUATION BOARD




(L x W x H) 6.3cm x 6.3cm x 1.3cm

EVQ3428A-L-00A	MPQ3428AGL
EVQ3428A-L-00A	MPQ3428A

Efficiency vs. Output Current

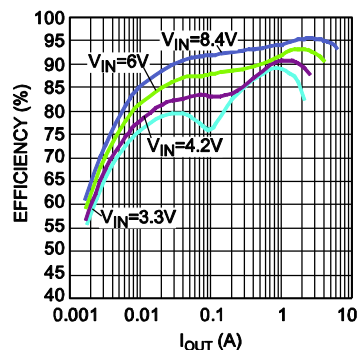

EVALUATION BOARD SCHEMATIC

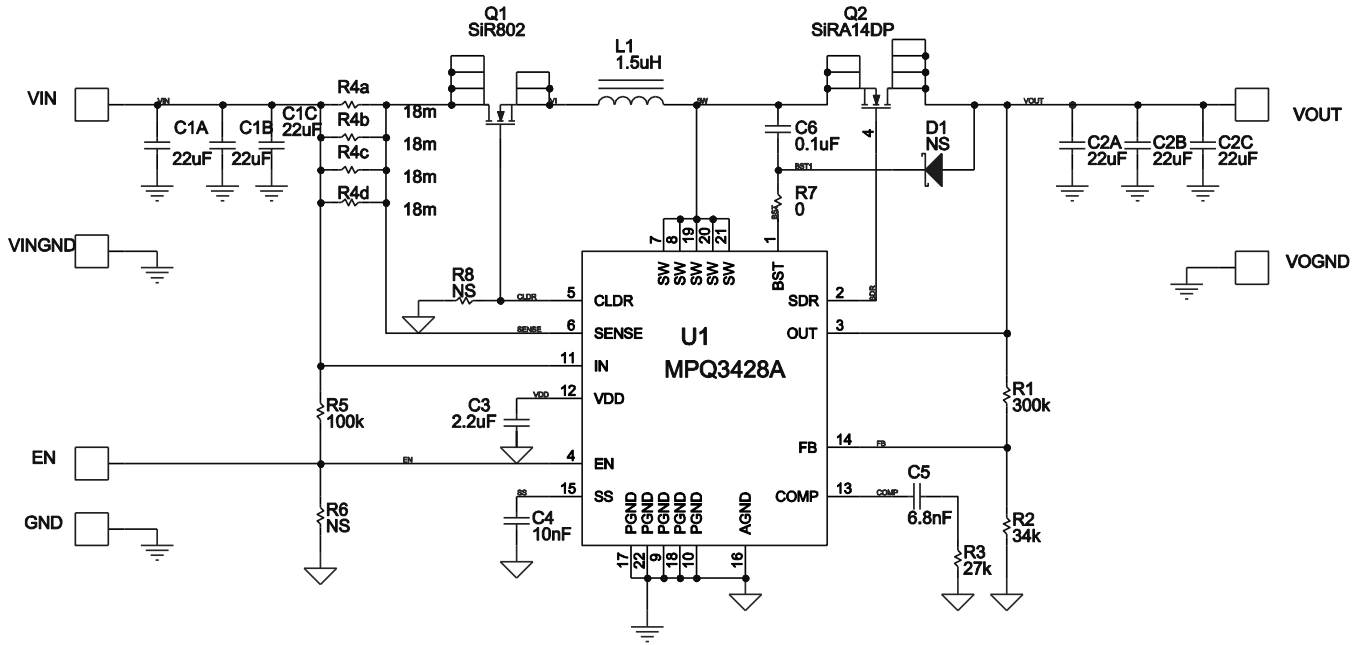

EVQ3428A-L-00A BILL OF MATERIALS


Qty	Ref	Value	Description	Package	Manufacturer	Manufacturer P/N
6	C1A, C1B, C1C, C2A, C2B, C2C	22 μ F	25V, ceramic Capacitor	1210	muRata	GRM32ER61E226KE15L
1	C3	2.2 μ F	25V, ceramic Capacitor	0805	muRata	GRM21BR71E225KA73L
1	C4	10nF	50V ceramic capacitor	0603	muRata	GRM188R71H103KA01D GRM188R71H103KA01D
1	C5	6.8nF	50V ceramic capacitor	0603	muRata	GRM188R71H682KA01D
1	C6	0.1 μ F	50V, ceramic Capacitor	0603	muRata	GRM188R71H104KA93D
0	D1	NS		SOD-323		
1	L1	1.5 μ H	4.3mOhm, 11A inductor	7x7mm SMD	Würth	744314150
1	Q1	SiR802	20V/30A 5mOhm, N-MOSFET	PowerPAK SO8	VISHAY	SIR802DP-T1-GE3
1	Q2	SiRA14DP	30V, 5mOhm 58A, MOSFET	PowerPAK SO8	VISHAY	SIRA14DP-T1-GE3
1	R1	300k	Film resistor, 1%	SM0603	YAGEO	RC0603FR-07300KL
1	R2	34k	Film resistor, 1%	SM0603	YAGEO	RC0603FR-0734KL
1	R3	27k	Film resistor, 5%	SM0603	YAGEO	RC0603FR-0727K
4	R4a, R4b, R4c, R4d	18m	low ohmic Film resistor, 1%	SM0805	YAGEO	PR0805FKF070R018L
1	R5	100k	Film resistor, 5%	SM0603	YAGEO	RC0603JR-07100KL
0	R6, R8	NS		SM0603		
1	R7	0	Film resistor, 5%	SM0603	YAGEO	RC0603JR-070RL
1	U1	MPQ3428A	Boost converter	QFN22- 3x4mm	MPS	MPQ3428AGL
2	EN, GND	TP1mm	Golden, 1mm Test Point	Generic	Generic	TP1mm
4	VIN, VINGND, VOOU, VOGND	TP2mm	Golden, 2mm Test Point	Generic	Generic	TP2mm

EVB TEST RESULTS


Performance waveforms are tested on the evaluation board.

$V_{IN} = 3.3V$, $V_{OUT} = 12V$, $L = 1.5\mu H$, $I_{OUT}=2A$, $C_{OUT}=22\mu F*3$, $R_{SENSE}=4.5m\Omega$, $T_A = 25^\circ C$, unless otherwise noted.


Efficiency vs. Output Current

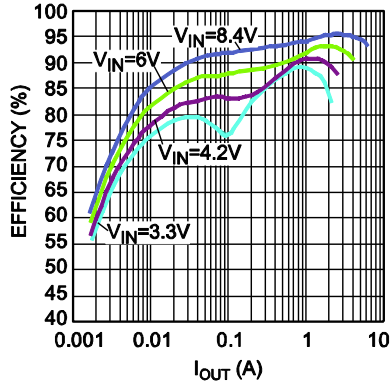


Efficiency vs. Output Current
Remove Q1 and R4, connect L to V_{IN} , $R8=0\Omega$

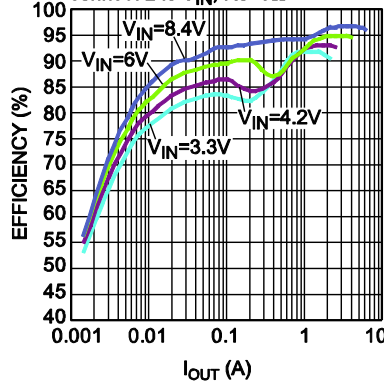


Load Regulation

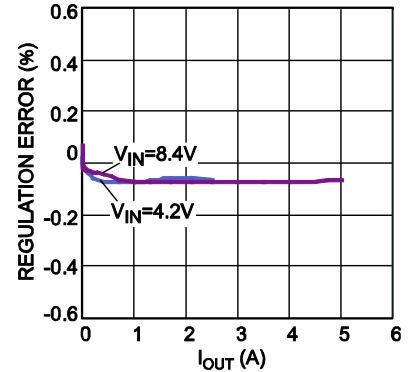


Line Regulation

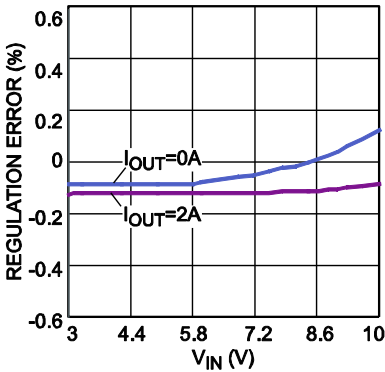


Case Temperature Rise

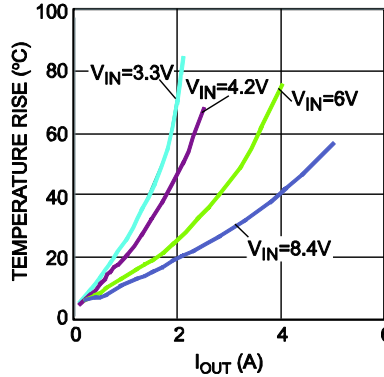


Case Temperature Rise
Remove Q1 and R4, connect L to V_{IN} , $R8=0\Omega$

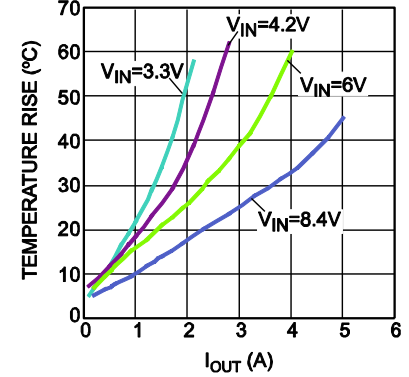

Bode Plot
 $V_{IN}=3.3V$, $I_{OUT}=2A$

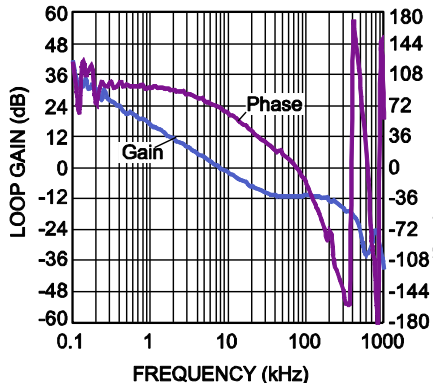










Bode Plot
 $V_{IN}=6V$, $I_{OUT}=4A$

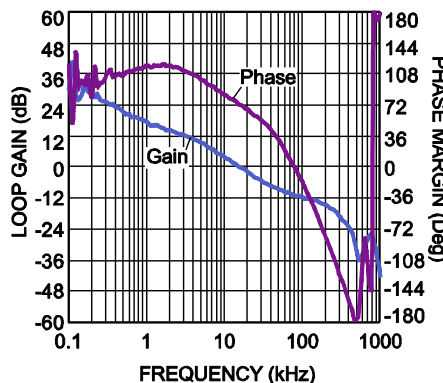

EVB TEST RESULTS (continued)

Performance waveforms are tested on the evaluation board.

$V_{IN} = 3.3V$, $V_{OUT} = 12V$, $L = 1.5\mu H$, $I_{OUT} = 2A$, $C_{OUT} = 22\mu F \times 3$, $R_{SENSE} = 4.5m\Omega$, $T_A = 25^\circ C$, unless otherwise noted.

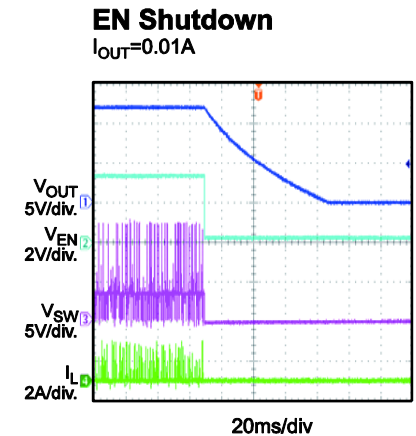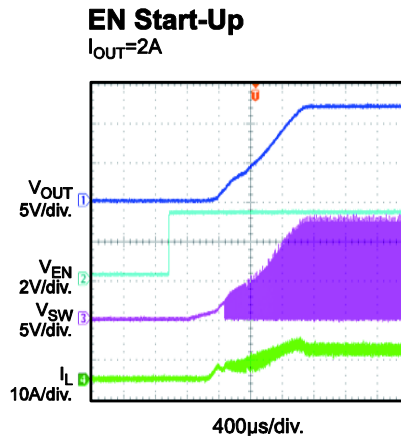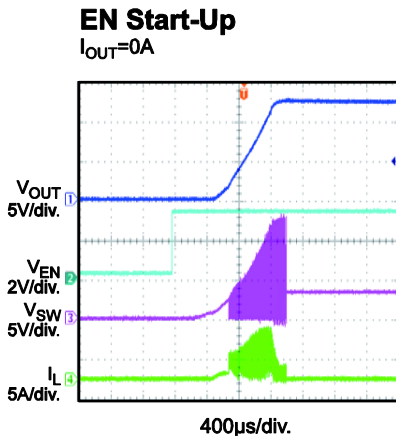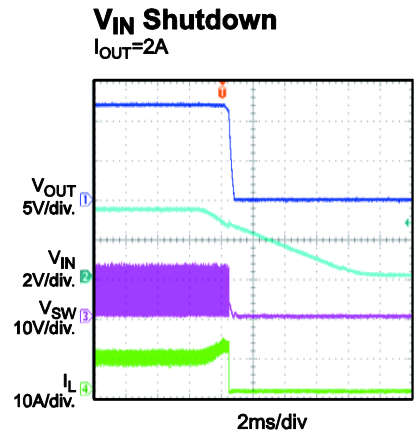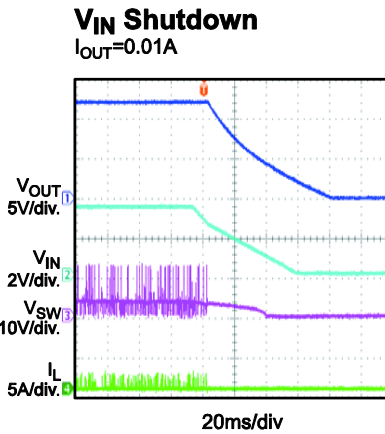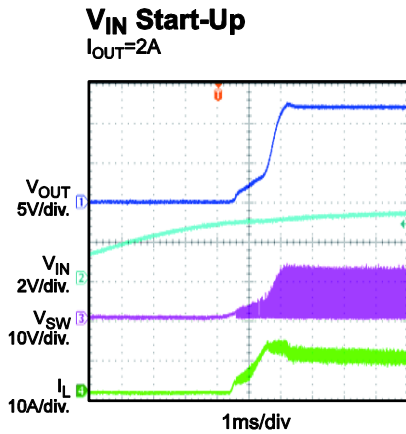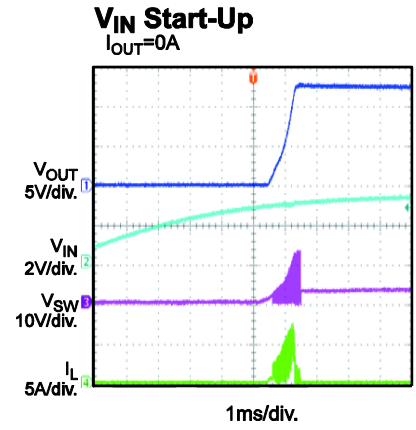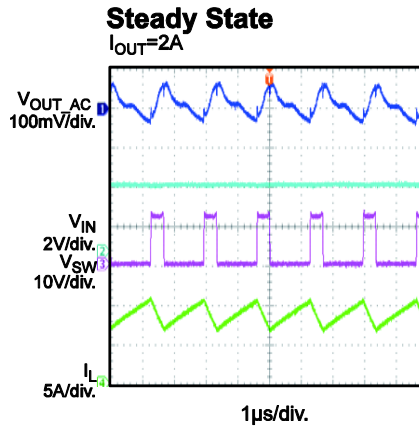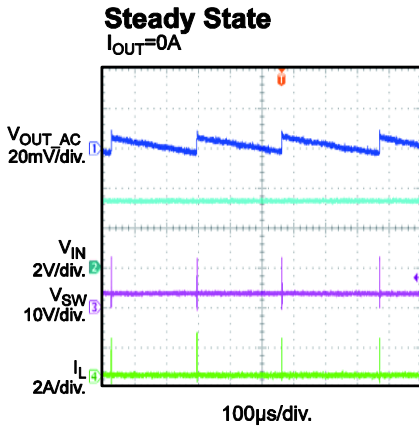


EVB TEST RESULTS (continued)

Performance waveforms are tested on the evaluation board.

$V_{IN} = 3.3V$, $V_{OUT} = 12V$, $L = 1.5\mu H$, $I_{OUT}=2A$, $C_{OUT}=22\mu F*3$, $R_{SENSE}=4.5m\Omega$, $T_A = 25^\circ C$, unless otherwise noted.

EN Shutdown


$I_{OUT}=2A$

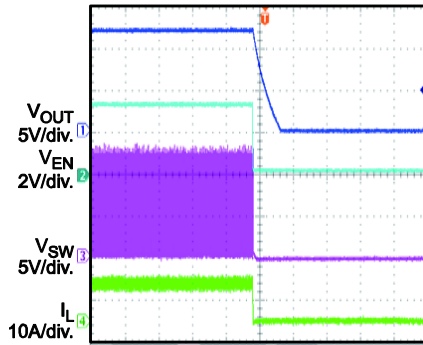

400 μs /div.

Response to Transient Load


$V_{IN}=6V$, $I_{OUT}=0.1A$ to $1A@25mA/\mu s$

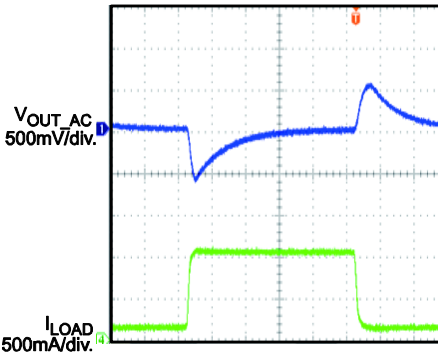

200 μs /div.

Response to Transient Load


$V_{IN}=6V$, $I_{OUT}=1A$ to $2A@25mA/\mu s$

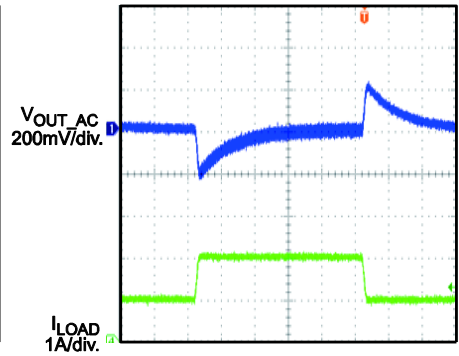

200 μs /div.

Response to Output Short


$I_{OUT}=2A$

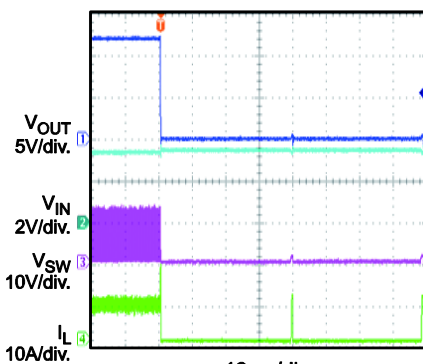

10ms/div

Recovery from Output Short

$I_{OUT}=2A$

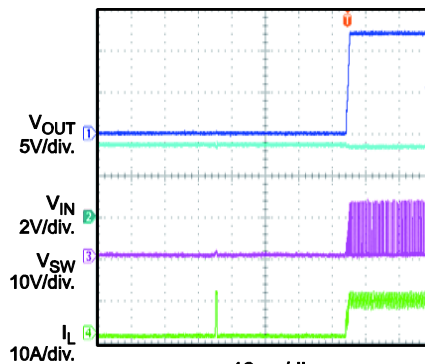

10ms/div

PRINTED CIRCUIT BOARD LAYOUT

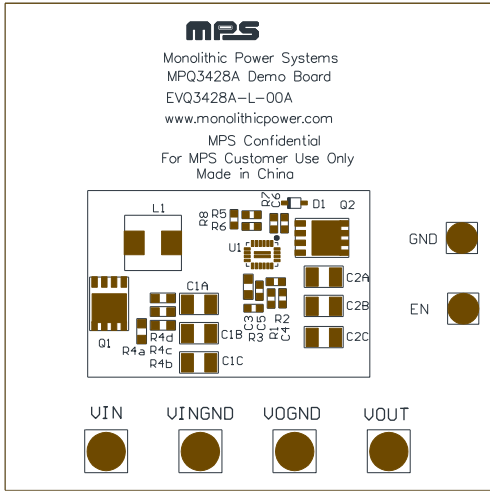


Figure 1: Top Silkscreen Layer

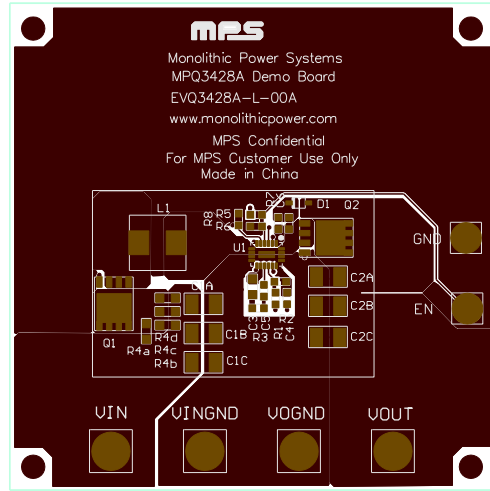


Figure 2: Top Layer

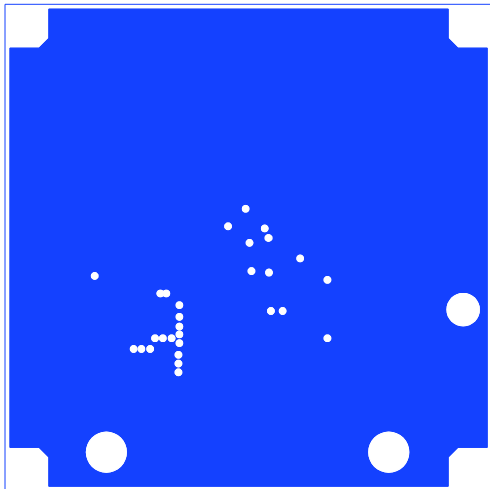


Figure 3: Middle Layer 1

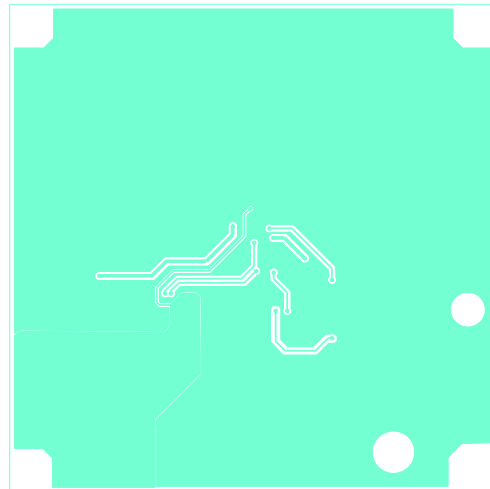


Figure 4: Middle Layer 2

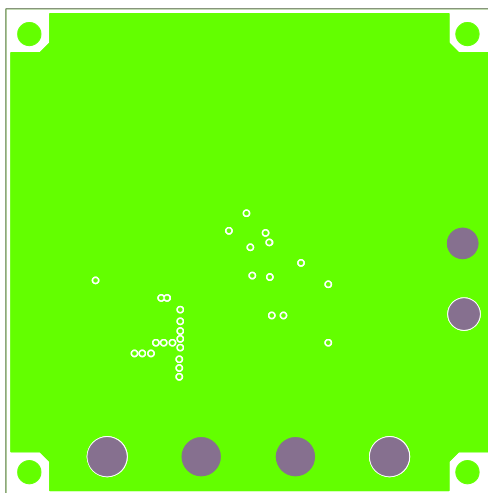


Figure 5: Bottom Layer

QUICK START GUIDE

The output voltage of this board is set to 12V. The board layout accommodates most commonly used inductors and output capacitors. With an input ranging from 3V to 10V, this board can provide load with 3A current from 6V input or 2A current from 3.3V input. To use this EVB for evaluation, you can do as below:

1. Preset Power Supply to between 3V and 10V.
2. Turn Power Supply off.
3. Preset Load to a value, for example, 2A.
4. Connect Power Supply terminals to:
 - a. Positive (+): VIN
 - b. Negative (-): GND
5. Connect Load to:
 - a. Positive (+): VOUT
 - b. Negative (-): GND
5. Turn Power Supply on after making connections. The MPQ3428A will automatically startup to work.

The output voltage VOUT can be programmed by changing R2. And the value of R2 can be calculated by the following formula:

$$R2 = R1 \times \frac{V_{FB}}{V_{OUT} - V_{FB}}$$

Where R1=300kΩ, and V_{FB}=1.225V.

If EN functions is preferred, apply a high level (>1.39V) turns on MPQ3428A, low level (<0.4V) turns off MPQ3428A. After being turned off, output voltage will be discharged to 0V due to input disconnect function.

The default configuration of this board is using external sensing resistor. To use the internal sensing block, first shut off power supply, then connect CLDR pin (find it by looking for R8 on the board) to GND through R8 of which the value should be 0Ω. After power-on, MPQ3428A automatically uses internal sensing resistor.

NOTICE: The information in this document is subject to change without notice. Please contact MPS for current specifications. Users should warrant and guarantee that third party Intellectual Property rights are not infringed upon when integrating MPS products into any application. MPS will not assume any legal responsibility for any said applications.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Power Management IC Development Tools](#) *category:*

Click to view products by [Monolithic Power Systems](#) *manufacturer:*

Other Similar products are found below :

[EVB-EP5348UI](#) [DA9063-EVAL](#) [BQ24155EVM](#) [BQ25010EVM](#) [REG710EVM-5](#) [TPS54980EVM-022](#) [TPS65010EVM-230](#) [BQ24120EVM-001](#) [BQ24212EVM-678](#) [BQ3050EVM-001](#) [ISL9520EVAL1Z](#) [UCC3809EVM](#) [LM3691TL-1.2EV/NOPB](#) [SOT23-3EV-VREG](#) [SOT89-3EV-VREG](#) [TPS2458EVM](#) [TPS54229EEVM-056](#) [TPS54329EEVM-056](#) [MAX8556EVKIT](#) [MAX20012EVKIT#](#) [MAX15005AEVKIT+](#) [S6SBP203A8FVA1001](#) [TPS652510EVM](#) [STEVAL-ISA047V1](#) [ISL8502AEVAL1Z](#) [ISL8009AEVAL1Z](#) [TPS76901EVM-127](#) [FRDM-HB2001-EVM](#) [BM6208FS-EVK-001](#) [LM5115EVAL](#) [LP5900TL-2.5EV](#) [DRI0043](#) [7E.12.8.230.0002](#) [NCP10671B05GEVB](#) [MAX20073EVKIT#](#) [EVB-EN6337QA](#) [AP3125AEV1](#) [NIV6350MT2GEVB](#) [XMCA1](#) [RD33771-48VEVM](#) [EVKT-MPM3695-10-A](#) [DEMO200W12VDCLLC](#) [SAMPLEBOXILD8150TOBO1](#) [MAX18066EVKIT#](#) [AP61100Z6-EVM](#) [AP62300WU-EVM](#) [TPS7H5007EVM](#) [TPS7H5008EVM](#) [TPS7H5005EVM](#) [LM5157EVM-SEPIC](#)