TECHNICAL SPECIFICATION

<= 108 Ohm/kmConductor

resistance

Shielding $\leq 20 \text{ Ohm/km}$

resistance

Characteristic 180 Ohm

Impedance (at 20kHz)

Test Voltage cond to cond: 500 Veff

cond to shield: 2000 Veff

Capacitance cond to cond: 65 pF/km

cond to shield: 105 pF/km

Side Circuit 55 pF/m

Capacitance

Side/Side Circuit 135 pF/m

Capacitance

Noise Attenuation 130 dB (see wiring)

ORDERING DATA

Reels at 100m (4.6kg)

packed in Gotham box

300m (13.4kg) H327 spool

Weight/metre 0.042kg Colour matt black

(OUAD WIRING)

5 = screening 1+2


1 = red

2 = pink $3 = \overline{\text{white}}$

4 = ivory

MICROPHONE WIRING DIAGRAM

Dimensions

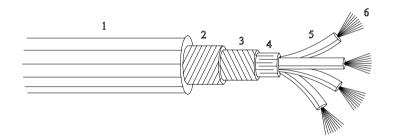

1 - JACKET PVC, Ø5,4mm +/-0,20mm,

velvet black (ultra soft)

2 - SHIELD NO. 1 Bare copper wire (0,10mm) 3 - SHIELD NO. 2 Bare copper wire (0,10mm)

4 - Viscose Fibre Coating counter wrapped to the core assembly

5 - INSULATION PE, Ø1.20mm +/-0,05mm, quad twisted, (CONDUCTOR) colours are white, ivory, pink and red Bare copper wire, 96 x 0.05mm (0.20mm²) 6 - CONDUCTOR

CONVERTED FROM PS0011 ISS3 (04.09.96) IN JAN 2003

TITLE GAC-4/1 4 CONDUCTOR DOUBLE SHIELDED CABLE

ALL DIMENSIONS IN MM ANGLES IN DECIMAL DEGREES

DELTRON Emcon

MICRO

PHONE

Components

DrgNo 441-0100

GENERAL SPECIFICATION FOR AUDIO CABLE

CUSTOMER

Aprvd Date 10/02/03 Aprvd By MC

FILTER REF

Drwn by BFS

Scale: NTS

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Deltron manufacturer:

Other Similar products are found below:

575-0101 571-0200 334-0000 342-0000 W127G 459-0070 066541F 066542D W205C W106C 717-0400 4MP1308 000-035-100 461-0010 486-121209-66 490-170805E-68 490-250805E-68 577-0500 557-0500 486-261612-66 486-121208-68 480-0050 456-0100 486-261612-68 4DR3526 590-0400 486-261612 483-0100 461-0020E 459-0110 479-0020-5 356-0200 480-C060 331-0000 459-0080 462-0020E 4MP2616 460-0090 455-0060 480-0040 480-0030 490-040503A-68 800-0400 MDU14S 487-261612E-66 483-0030 480-0010 466-0150 455-0020 455-0010