



## **NTE11 (NPN) & NTE12 (PNP)** **Silicon Complementary Transistors** **High Current Amplifier**

### **Description:**

The NTE11 (NPN) and NTE12 (PNP) are silicon complementary transistors in a TO92 type case designed for use in low-frequency output amplifier, DC converter, and strobe applications.

### **Features:**

- High Collector Current:  $I_C = 5A$  Max
- Low Collector-Emitter Saturation Voltage

### **Absolute Maximum Ratings:** ( $T_A = +25^\circ\text{C}$ unless otherwise specified)

Collector-Base Voltage,  $V_{CBO}$

NTE11 .....	40V
NTE12 .....	27V

Collector-Emitter Voltage,  $V_{CEO}$

NTE11 .....	20V
NTE12 .....	18V

Emitter-Base Voltage,  $V_{EBO}$

Collector Current,  $I_C$

Continuous .....	5A
Peak .....	8A

Total Power Dissipation,  $P_D$  ..... 750mW

Operating Junction Temperature Range,  $T_J$  .....  $+150^\circ\text{C}$

Storage Temperature Range,  $T_{stg}$  .....  $-55^\circ$  to  $+150^\circ\text{C}$


### **Electrical Characteristics:** ( $T_A = +25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector Cutoff Current NTE11	$I_{CBO}$	$V_{CB} = 10\text{V}, I_E = 0$	—	—	0.1	$\mu\text{A}$
NTE12		$V_{CB} = 10\text{V}, I_E = 0$	—	—	100	nA

**Electrical Characteristics (Cont'd):** ( $T_A = +25^\circ\text{C}$  unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Emitter Cutoff Current NTE11	$I_{EBO}$	$V_{EB} = 7\text{V}, I_C = 0$	—	—	0.1	$\mu\text{A}$
NTE12		$V_{EB} = 5\text{V}, I_C = 0$	—	—	1.0	$\mu\text{A}$
Collector-Emitter Voltage NTE11	$V_{CEO}$	$I_C = 1\text{mA}, I_B = 0$	20	—	—	V
NTE12		$I_C = 1\text{mA}, I_B = 0$	18	—	—	V
Emitter-Base Voltage	$V_{EBO}$	$I_E = 10\mu\text{A}, I_C = 0$	7	—	—	V
DC Current Gain NTE11	$h_{FE1}$	$V_{CE} = 2\text{V}, I_C = 500\text{mA}$ , Note 1	340	—	600	
NTE12		$V_{CE} = 2\text{V}, I_C = 2\text{A}$ , Note 1	180	—	625	
NTE11 Only	$h_{FE2}$	$V_{CE} = 2\text{V}, I_C = 2\text{A}$ , Note 1	150	—	—	
Collector-Emitter Saturation Voltage NTE11	$V_{CE(\text{sat})}$	$I_C = 3\text{A}, I_B = 100\text{mA}$ , Note 1	—	—	1	V
NTE12		$I_C = 3\text{A}, I_B = 100\text{mA}$ , Note 1	—	0.4	1.0	V
Transition Frequency NTE11	$f_T$	$V_{CB} = 6\text{V}, I_E = 50\text{mA}, f = 200\text{MHz}$	—	150	—	MHz
NTE12		$V_{CB} = 6\text{V}, I_E = 50\text{mA}, f = 200\text{MHz}$	—	120	—	MHz
Collector Output Capacitance NTE11	$C_{ob}$	$V_{CB} = 20\text{V}, I_E = 0, f = 1\text{MHz}$	—	—	50	pF
NTE12		$V_{CB} = 20\text{V}, I_E = 0, f = 1\text{MHz}$	—	60	—	pF

Note 1. Pulse measurement

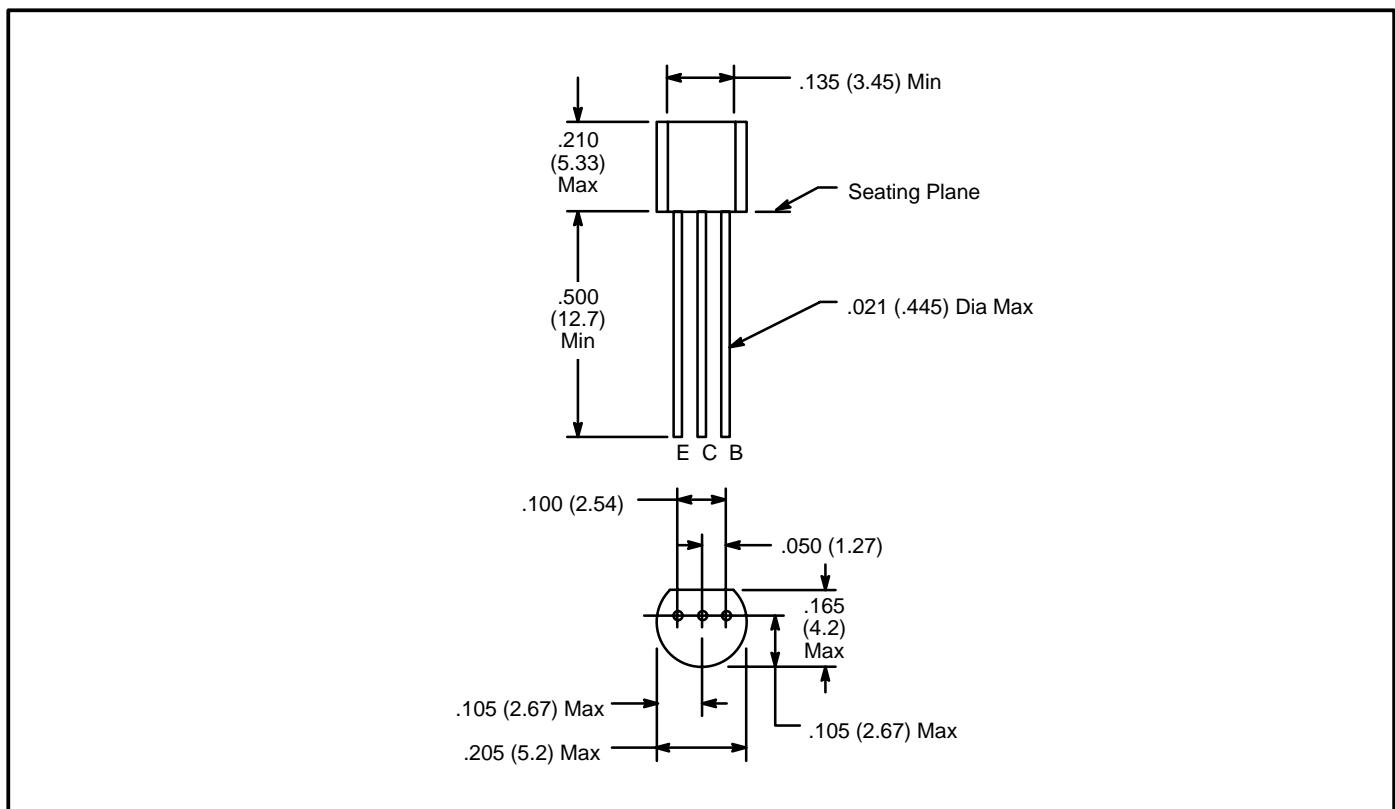

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for Bipolar Transistors - BJT category:***

***Click to view products by NTE manufacturer:***

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MJ15024/WS](#) [MJ15025/WS](#) [BC546/116](#) [BC556/FSC](#) [BC557/116](#) [BSW67A](#) [HN7G01FU-A\(T5L,F,T](#)  
[NJVMJD148T4G](#) [NSVMMBT6520LT1G](#) [NTE187A](#) [NTE195A](#) [NTE2302](#) [NTE2330](#) [NTE2353](#) [NTE316](#) [IMX9T110](#) [NTE63](#) [NTE65](#)  
[C4460](#) [SBC846BLT3G](#) [2SA1419T-TD-H](#) [2SA1721-O\(TE85L,F\)](#) [2SA1727TLP](#) [2SA2126-E](#) [2SB1202T-TL-E](#) [2SB1204S-TL-E](#) [2SC5488A-TL-H](#)  
[2SD2150T100R](#) [SP000011176](#) [FMC5AT148](#) [2N2369ADCSM](#) [2SB1202S-TL-E](#) [2SC2412KT146S](#) [2SC4618TLN](#) [2SC5490A-TL-H](#)  
[2SD1816S-TL-E](#) [2SD1816T-TL-E](#) [CMXT2207 TR](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#) [BC557B](#) [TTC012\(Q\)](#) [BULD128DT4](#) [JANTX2N3810](#)  
[Jantx2N5416](#) [US6T6TR](#) [KSF350](#) [068071B](#)