


Ninigi

D A T A S H E E T

ZL20 SERIES 2.54 MM (0.100") PIN HEADER BASIC STACK TYPE


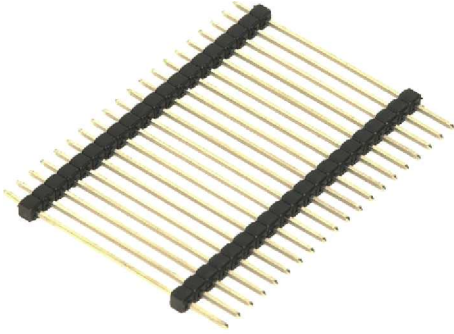


Specification:

- 1) To +105° Current Rate: 3 A
- 2) Dielectric Withstanding Voltage: 500 VAC
- 3) Insulation Resistance: 5000 MW
- 4) Temperature: -55°C ~ 105°C
- 5) Insulator: Thermoplastic (UL94V-0)

Series No.	No. of Contact (N)	Contact Plating	C	D	L1	E
ZL2029-20-T	20	Tin	29.0	6.5	19.2	3.3
ZL2029-20	20	Gold	29.0	6.5	19.2	3.3
ZL2038-20-T	20	Tin	37.8	6.5	28.0	3.3
ZL2038-20	20	Gold	37.8	6.5	28.0	3.3
ZL2045-20-T	20	Tin	45.3	6.5	35.5	3.3
ZL2045-20	20	Gold	45.3	6.5	35.5	3.3

Pitch: 2.54 mm

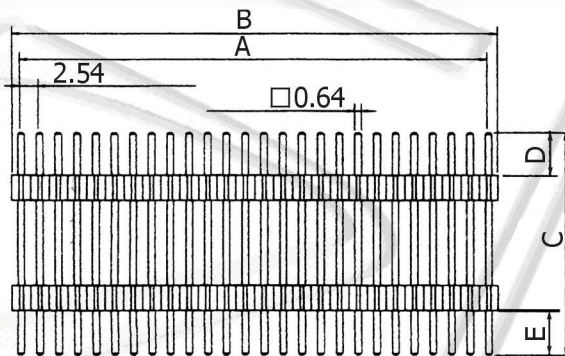

$$A = 2.54 * (N-1)$$

$$B = 2.54 * N$$

All dimensions in mm.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Ninigi](#) manufacturer:

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [000-34000](#) [0009482033](#) [0009507031](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [647662-1](#) [65039-019ELF](#) [65781-018](#) [65781-047](#) [65817-002LF](#) [65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67016-026LF](#) [67046-001LF](#)