


**SPECIFICATIONS**

Current Rating: 1A AC,DC  
 Voltage Rating: 50V AC,DC  
 Temperature Range: -25°C ~ +85°C  
 Contact Resistance: 20mΩ Max.  
 Insulation Resistance: 100MΩ Min.  
 Withstanding Voltage: 500V AC/minute  
 Material: PBT,UL94V-0  
 Color: Natural(White)

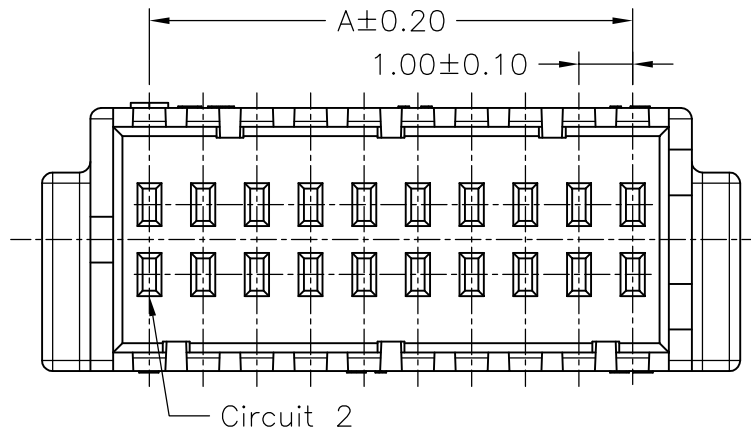

**Ordering Information & Dimensions**

PART NO.	Dimensions	
	A	B
A1001H-2X06P	5.00	9.00
A1001H-2X08P	7.00	11.00
A1001H-2X09P	8.00	12.00
A1001H-2X10P	9.00	13.00
A1001H-2X15P	14.00	18.00
A1001H-2X20P	19.00	23.00
A1001H-2X25P	24.00	28.00

				UNIT	SCALE	SHEET	TITLE:
				mm		1 of 1	
				DRAWN BY	APPROVED BY		
				董正一	董正一		
B3	REVISE	2008.10.24	2003.04.15	2003.04.15			
B2	REVISE	2008.09.12	GENERAL TOLERANCE				
B1	REVISE	2007.06.14	X. X±0.25	ANGLE±			
B0	NEW RELEASE	2006.04.14	X. XX±0.15				
REV.	DESCRIPTION	DATE	X. XXX±0.05			DRAW NO. :	REV.
						A1001H-2XNP	B3

**1.00mm PITCH  
HOUSING-DUAL ROW**

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [I/O Connectors](#) category:*

*Click to view products by [Joint manufacturer](#):*

Other Similar products are found below :

[571763P](#) [58098-0628](#) [D38999/20FJ24PA L/C](#) [D38999/20FJ29SB L/C](#) [D38999/24FG11SN L/C](#) [72.250.1628.2](#) [72.250.2428.2](#) [74720-0505](#)  
[747680210](#) [76.350.0729.0](#) [76871-1403](#) [FCN-244F080-G/1](#) [FCN-260A9920](#) [FCN-268D024-G/11](#) [FCN-268D024-G/2F#10X-R10](#) [MP-](#)  
[5T180MUNNA-005](#) [MP-5XRJ45UNNB-003](#) [PCR-E36PM](#) [PCS-E50FA](#) [PCS-XE26LKA](#) [PCS-XE26MA+](#) [PCS-XES68MS+](#) [G38A71314B](#) [91-](#)  
[569719-35R](#) [DX40-50P\(55\)](#) [1571250010](#) [157-22500-3](#) [MS3471L14-19P L/C](#) [MS3476W12-10S L/C](#) [171224-6031](#) [1888020-8](#) [91-569719-35P](#) [91-](#)  
[569786-35H](#) [91-569786-35M](#) [91-644626-35P](#) [172501-4002](#) [172501-6002](#) [FCN-260C008-A/L0](#) [FCN-260C024-AL0](#) [FCN-261Z008](#) [FCN-264D024-](#)  
[G2K](#) [FCN-268D008-G/1K](#) [2000314-1](#) [200331-1](#) [2007498-2](#) [PCR-E28LMDAG1+](#) [PCR-E36FC+](#) [PCS-E28FS+](#) [PCS-XE26SLFD+](#) [PCS-](#)  
[XE26SLFDT+](#)