


## NEW PRODUCT INFORMATION

### New super-bright Through-hole & SMD-LEDs - 590nm yellow & 624nm reddish-orange

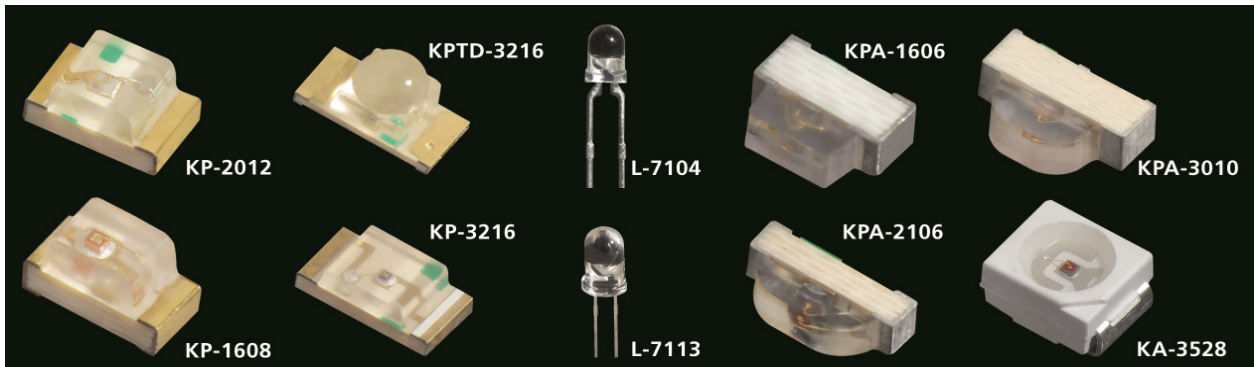

#### Features

- Low power consumption
- Forward voltage reddish-orange = typ. 2,2V - max. 2,8V
- Forward voltage yellow = typ. 2,0V - max. 2,5V
- RoHS compliant

Part number	Package	Dimensions	lv (mcd) @ 20mA		Viewing angle
			min.	typ.	
L-7104SYCK-J3	3mm	3mm Through-hole	1600	2600	34°
L-7113SYCK-J3	5mm	5mm Through-hole	4000	6000	20°
KP-1608SYCK-J3	0603	1,6 x 0,8 x 1,1 mm	200	320	120°
KPT-1608SYCK-J3	0603 Super Thin	1,6 x 0,8 x 0,75 mm	200	320	120°
KP-2012SYCK-J3	0805	2,0 x 1,25 x 1,1 mm	200	320	120°
KPT-2012SYCK-J3	0805 Super Thin	2,0 x 1,25 x 0,75 mm	200	320	120°
KP-3216SYCK-J3	1206	3,2 x 1,6 x 1,1 mm	200	320	120°
KPT-3216SYCK-J3	1206 Super Thin	3,2 x 1,6 x 0,75 mm	200	320	120°
KPTD-3216SYCK-J3	1206 Dome Lens	3,2 x 1,6 x 1,8 mm	1300	1700	35°
KA-3528SYCK-J3	PLCC-2	3,5 x 2,8 x 1,9 mm	200	450	120°
KPA-1606SYCK-J3	0602 Right Angle	1,6 x 0,6 x 1,2 mm	200	350	110°
KPA-2106SYCK-J3	0802 Right Angle	2,1 x 0,6 x 1,0 mm	200	350	120°
KPA-3010SYCK-J3	1104 Right Angle	3,0 x 1,0 x 2,0 mm	200	350	120°

Luminous intensity value is traceable to the CIE 120-2007 compliant national standards

Part number	Package	Dimensions	lv (mcd) @ 20mA		Viewing angle
			min.	typ.	
L-7104SECK-J3	3mm	3mm Through-hole	1000	1600	34°
L-7113SECK-J3	5mm	5mm Through-hole	3600	6000	20°
KP-1608SECK-J3	0603	1,6 x 0,8 x 1,1 mm	200	350	120°
KPT-1608SECK-J3	0603 Super Thin	1,6 x 0,8 x 0,75 mm	200	350	120°
KP-2012SECK-J3	0805	2,0 x 1,25 x 1,1 mm	200	350	120°
KPT-2012SECK-J3	0805 Super Thin	2,0 x 1,25 x 0,75 mm	200	350	120°
KP-3216SECK-J3	1206	3,2 x 1,6 x 1,1 mm	200	350	120°
KPT-3216SECK-J3	1206 Super Thin	3,2 x 1,6 x 0,75 mm	200	350	120°
KPTD-3216SECK-J3	1206 Dome Lens	3,2 x 1,6 x 1,8 mm	1600	2500	35°
KA-3528SECKT-J3	PLCC-2	3,5 x 2,8 x 1,9 mm	300	450	120°
KPA-1606SECK-J3	0602 Right Angle	1,6 x 0,6 x 1,2 mm	200	380	110°
KPA-2106SECK-J3	0802 Right Angle	2,1 x 0,6 x 1,0 mm	200	380	120°
KPA-3010SECK-J3	1104 Right Angle	3,0 x 1,0 x 2,0 mm	200	380	120°

Luminous intensity value is traceable to the CIE 120-2007 compliant national standards

## Kingbright

Head office in Germany:

Lindenau 7 / Gewerbegebiet  
D-47661 Issum  
Tel. +49 (2835) 4446-0  
Fax +49 (2835) 4446-29  
info@kingbright-europe.de

Branch office in France:

33 rue Benoit Malon  
F-92150 SURESNES  
Tel. +33 01.71.12.61.28  
Fax +33 01.71.12.61.36  
info@kingbright-europe.fr

[www.kingbright-europe.de](http://www.kingbright-europe.de)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Standard LEDs - SMD category](#):*

*Click to view products by [Kingbright manufacturer](#):*

Other Similar products are found below :

[LTST-C19GD2WT](#) [LTST-N683GBEW](#) [597-3006-607F](#) [597-3403-607F](#) [LTW-K140SZR40](#) [LTW-M140ZVS](#) [598-8110-100F](#) [598-8170-100F](#)  
[598-8610-202F](#) [7012X7](#) [AAAF5060QBFSEEZGS](#) [12-22SURSYGC/S530-A3/E2/TR8](#) [1383SURT/S530-A3/TR1\(R\)](#) [APT1608QGW](#)  
[EASV1803BA0](#) [SML310BATT86](#) [SML-512VWT86A](#) [SML-LX0606SISUGC/A](#) [SML-LXL1307SRC-TR](#) [SML-LXR851SIUPGUBC](#)  
[LT1ED53A](#) [17-21/G6C-FM1N2B/3T](#) [FAT801-S](#) [SSL-LXA227IC-TR31A](#) [AM27ZGC03](#) [APB3025SGNC](#) [APHK1608VGCA](#) [APT2012QGW](#)  
[CLMVC-FKA-CA1E1L81BB7C3C3](#) [CLYBA-FKA-CFHHL9BBB7A363](#) [CMD11504UR](#) [LTW-020ZDCG](#) [LTW-21TS5](#) [LTW-K140SZR30](#)  
[HSMY-C177](#) [UYGT801-S](#) [KVH1C100MF6R](#) [42-21SYGC/S530-E1/TR8](#) [YGFR411-H](#) [597-2311-402F](#) [597-2712-602F](#) [5973212407NF](#)  
[597-3302-607F](#) [597-5202-407F](#) [598-8330-117F](#) [SAW8WA2A-L35M40-CA](#) [SML013WBDW1](#) [SML-LX0402IC-TR](#) [CLMVC-FKA-](#)  
[CLBDGL7LBB79353](#) [VLMKG3400-GS08](#)