

QorlQ LS Processor Family

QorlQ LS1012A Reference Design Board

The QorlQ LS1012A Reference Design Board is a compact form factor tool that enables evaluation and software development for a broad range of applications.

OVERVIEW

The QorlQ LS1012A communications processor addresses a wide variety of applications such as consumer NAS, battery-powered mobile NAS, entry-level broadband gateway, valuetier IoT gateways, trusted gateways, Industrial automation, building control, networked audio, Ethernet drives and more. The QorlQ LS1012A reference design board (LS1012ARDB) is a compact form-factor tool that enables evaluation of the LS1012A solution for these and other low-end networking applications. The LS1012ARDB also features an expansion connector suitable for adding additional components such as Arduino® shields

The QorlQ LS1012ARDB can help shorten your time-to-market by exercising most capabilities of the device and can serve as a reference for hardware development. It can also be used as a debug tool to check behaviors on the board compared to behaviors seen on customer boards. The board can be used for software development and performance evaluation prior to the customer's own board being ready.

The LS1012ARDB comes in a compact 5.59 in x 5.59 in form factor which allows mounting in an enclosure. An SDIO Wi-Fi® module is included to facilitate evaluation and development of Wi-Fi connectivity solutions.

The LS1012A processor is a cost-effective, power-efficient and highly integrated system-on-chip design that extends the reach of NXP's Value Performance line of QorlQ communications processors into the ultra-value tier. Featuring an extremely power-efficient 64-bit ARM® Cortex®-A53 core core running at up to 800 MHz and yielding over 2,000 CoreMarks, the LS1012A will deliver high packet processing performance and low power consumption.

Additional functionally includes an integrated hardware packet acceleration engine, together with high-speed interfaces and support for DDR3L running at 1000 MHz. High-speed peripherals include PCle® Gen2, Super Speed USB3.0, USB2.0, SATA3.0 and dual Gigabit Ethernet controllers, with support for RGMII, and SGMII that can accommodate 2.5 Gbit Ethernet PHYs. To deliver outstanding security performance, the LS1012A features a hardware-based acceleration engine to support Secure Boot, and networking with both ARM® TrustZone™ and NXP's QorIQ Trust Architecture.



FEATURES

MEMORY

- ▶ 1GB DDR3L SDRAM
- ▶ 4 GB eMMC Memory
- ▶ SDHC Card Slot
- ▶ 128 MB QSPI NOR Flash Bank0—64MB Bank1—64MB

ETHERNET

- ▶ 2 x GbE LAN connectors
- ▶ 1 x PoE enable port


USB

▶ 1 x USB 3.0 micro AB port

OTHER

- ▶ 1 x SDIO Wi-Fi® module 2.4 GHz 802.11b/g/n
- ▶ 1 x half-height Mini PCI Express connector
- ▶ 1 x USB to JTAG using NXP's K22
- ▶ 1 x SATA connector
- ▶ 1 x 3-Axis digital angular rate gyroscope
- 1 x 6-axis sensor
- ▶ 1 x Arduino® shield header for expansion

QorlQ LS1012ARDB SYSTEM BLOCK DIAGRAM

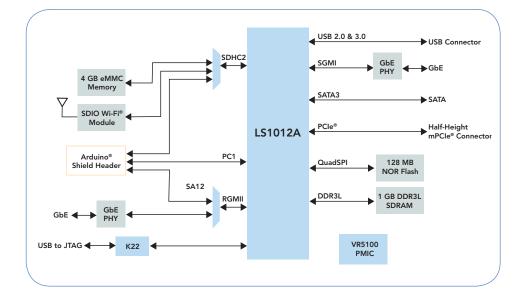

NXP DEVICES ON BOARD:

- LS1012A communications processor
- ▶ VR5100 multi-output DC-DC regulator
- K22 OpenSDA serial and debugger adapter
- ► FXAS21002 3-Axis digital angular rate gyroscope
- ► FXOS8700CQ 6-axis sensor with accelerometer and magnetometer
- ▶ BC3770 2.0 A switch-mode charger

- NTSX2102 dual-supply translating transceiver
- 74CBTLV3253 Dual 1 of 4 multiplexer/ demultiplexer
- ▶ NX5P2190 logic-controlled high-side power switch
- ► CBTL02043A 2:1 multiplexer/ demultiplexer
- ▶ MC34713 5.0 A 1.0 MHz single switchmode power supply

QorlQ LS1012A DEVELOPMENT BOARD





www.nxp.com

NXP, the NXP logo, Layerscape and QorlQNXP, the NXP logo, Layerscape and QorlQ are trademarks of NXP B.V. ARM, Cortex and TrustZone are registered trademarks of ARM Limited (or its subsidiaries) in the EU and/or elsewhere. All rights reserved. © 2014, 2016 NXP B.V.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Networking Development Tools category:

Click to view products by NXP manufacturer:

Other Similar products are found below:

MAX79356CAEVK1# MAX2982EVSYS BASENODE-EK DC-ME-9210-LX WIZ550SR-EVB DC9007A DC9021B

ATPANCOORDINATOR-EK SM2400-EVK2M2-C SM2400-EVK2M5-A Pi01-2 Pi01-3 Pi01-4 Pi01-42 Pi01-43 pind-4ge pind-4ga tbit32 DC9020B DC9022B RAPID-TSNEK-V0001 ABX00017 ABX00018 GKX00006 DC-ACC-DBME DC-ME-01T-MF-10 DG-EXT-300RR XP10010NMK-01 XPC100100K-02 XPC240300EK XPC250300EK XPE200100EK Development Kit, RS232 Development Kit, USB

MAX11947EVKIT# RD-HNPH2DCP962KIT-01 ATPL360-EK MIKROE-3739 MIKROE-3888 MIKROE-2747 NNDK-MOD5213-KIT

SB800EX-KIT ESP32-GATEWAY NCN5110ASGEVB NCN5121ASGEVB FPWEB2 ARGNKIT XENNKIT 604565285904 110060622