

## Safety SBCs for Automotive

Scalable functional safety solutions across automotive applications






### **SBC Overview**

System basis chips (SBCs) with functional safety architectures and behaviors are crucial for the automotive designs that support key vehicle electrification and autonomy trends. For decades, NXP has developed innovative SBCs that combine advanced power management with functional safety monitoring. Our growing SBC family with scalable microcontrollers and safety power management systems components is ideal for automotive-grade, systemoriented solutions that require high safety and high integrity performance.


NXP SBCs combine a linear voltage regulator or DC-DC power supply with CAN or LIN physical layer transceivers. An MCU controls the SBCs through a serial peripheral interface (SPI). In turn, the SBCs support different MCUs in terms of voltage, current, accuracy and load/line regulation. Q&A Watchdog and FCCU monitoring oversee microcontroller operation externally, while multiple diagnostics — including overcurrent, undervoltage and overtemperature — allow configurable safety behavior.

These SBCs support NXP MCU designs and other MCUs for powertrain, chassis, ADAS and gateway applications with associated safety levels.

#### **NXP® POWER SBC APPLICATION EXAMPLES**

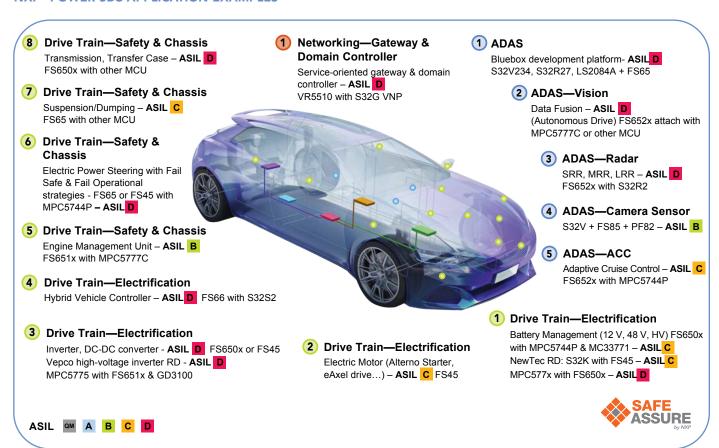

## Powertrain – Electrification, Chassis and Safety

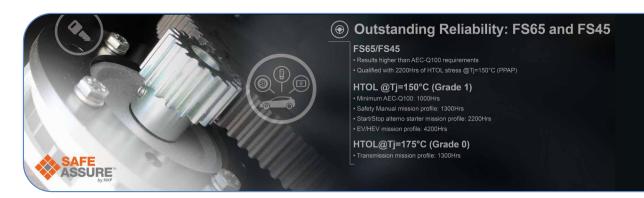

#### SAFETY SBC PRODUCT FEATURES FOR POWERTRAIN

Features	MC33907	MC33908	FS4500	FS6500	FS6600
Orderable part numbers	MC33907LAE, MC33907NAE	MC33908LAE, MC33098NAE	MC33FS45xx (Grade 1) MC35FS45xx (Grade 0)	MC33FS65xx (Grade 1) MC35FS65xx (Grade 0)	MC33FS6600
V pre-regulator	2.0 A /6.5 V VPRE capable 2.7 V to 28 V buck/ boost	2.0 A /6.5 V VPRE capable 2.7 V to 28 V buck/ boost	2.0 A / 6.5 V VPRE capable 2.7 V to 28 V buck/ boost	2.0 A /6.5 V VPRE capable 2.7 V to 28 V buck/ boost	Configurable 3.3/ 5.0 V to 10.0 A buck
Targeted system	12 V system	12 V system	12 V system	12 V system	12 or 24 V system
MCU core supply VCORE/ 2%	2.4 MHz VCORE, 0.8 A DC-DC	2.4 MHz VCORE, 1.5 A DC-DC	VCORE LDO 0.5 A	2.4 MHz VCORE 0.8/1.5/ 2.2 A DC-DC	2x bucks 0.8 V/ 2.5 A/ SVS/ multiphase
Auxiliary ECU supply VAUX/3%	Up to 300 mA tracker/ auxiliary	Up to 300 mA tracker/ auxiliary	Up to 400 mA tracker/ auxiliary	Up to 400 mA tracker/ auxiliary	1 x buck 1.2-3.3 V/ 2.5 A
CAN interface	1	1	1 (optional)	1 (optional)	0
LIN interface	1 (optional)	1 (optional)	1 (optional)	1 (optional)	0
I/Os	6 (incl. F/S inputs)	6 (incl. F/S inputs)	5 (incl. F/S inputs)	5 (incl. F/S inputs)	2 (inputs only)
AMUX (battery, I/O, temp, VREF)	Yes	Yes	Yes	Yes	Yes
Fail safe	Fail-safe state machine RSTb, RS0b	Fail-safe state machine RSTb, RS0b	Fail-safe state machine RSTb, FS0b, FS1b	Fail-safe state machine RSTb, FS0b, FS1b	Fail-safe state machine PGOOD, RSTb, FS0b
ASIL	ASIL D ready	ASIL D ready	ASIL D ready	ASIL D ready	Fit for ASIL D
Package	LQFP48eP 7 x 7 mm	LQFP48eP 7 x 7 mm	LQFP48eP 7 x 7 mm	LQFP48eP 7 x 7 mm	56 QFN 8 x 8 mm
Typical application	Electric power steering, motor control, chassis control	Electric power steering, motor control, chassis control	Gearbox, battery management and DCDC	EPS, battery management, active suspension, inverters,gearbox and transmission	Hybrid vehicle control unit
MCU alignment	MPC564xM, MPC564xA, MPC5643L, MPC5744P	MPC564xM, MPC564xA, MPC5643L, MPC5744P	S32K1x	MPC574x MPC577x	S32S2x

In powertrain applications, the safety SBC architecture supports independent monitoring of safety critical parameters. This is an essential function for the energy and power management of electric and hybrid electric vehicle applications battery management systems as well as steering and transmission control.

### **Key safety SBCs features**

- High quality, robustness and reliability
- Optimal scalability
- System integration
- Ultra-Low power modes
- Independent fail-safe state machine, fit for ASIL D

# Driver Replacement, In-Vehicle Experience and Networking



The flexible and scalable NXP System Basis Chips (SBCs) complement MCU platforms that require functional safety such as ADAS applications, as radar and vision and other applications as networking, radio, infotainment and V2X. Offering superior performance for tomorrow's vehicles. With buck and buck-boost DC-DC architectures that support input voltage ranges from 2.7 V to 60 V for 12 and 24 V markets and scalable power options, these SBCs provide an energy-efficient solution for high-performance MCUs.

### **Key features**

- Input supply to 60 V for 12 V and 24 V systems
- Low-power mode with 10  $\mu A$  in LPOFF
- Independent monitoring unit
- Process compliancy to ISO 26262 standard
- Proven and robust
- Scalable

	Features	FS8500 SAFE ASSURE	FS8400 SAFE ASSURE	VR5500	FS5502	VR5510 ♣ SAFE ASSURE
Power	V pre-regulator (12 and 24 V, 10 A HV Buck)	1	1	1	1	1
	Boost ( 5 to 5.74 V, 1.5 A, int. MOS)	1	1	1		1
	Buck (0.4 to 1.8V, 2.5A)	Up to 3	Up to 3	3	2	3
	LDO (configurable 1.1 to 5 V, up to 400 mA)	2	2	2	1	3 + 1 HV LDO (12 and 3.3 V input, 10 mA)
System	Communications	SPI I <sup>2</sup> C	SPI I <sup>2</sup> C	I <sup>2</sup> C	I <sup>2</sup> C	I <sup>2</sup> C
Safety	Qualification/ Safety Level	ASIL D	ASIL B	QM	QM	ASIL D
	Safety Output Pins	PGOOD RSTB FS0B	PGOOD RSTB FS0B	PGOOD RSTB	PGOOD RSTB	PGOOD RSTB FS0B
	Monitoring	VCOREMON VDDIO, 4 x VMONx Challenger WD FCCU External IC (ERRMON)	VCOREMON VDDIO 2 x VMONx Simple WD	VCOREMON VDDIO 1 x VMONx	VCOREMON VDDIO 1 x VMONx	VCOREMON VDDIOMON HVLDOMON 4 x VMONx Challenger WD FCCU
	Other	MCU Fault Recovery Strategy Analog BIST and Logical BIST AMUX	Analog BIST AMUX	AMUX		MCU Fault Recovery Analog BIST Logical BIST AMUX/FOUT
	Documentation	FMEDA Safety Manual	FMEDA Safety Manual			FMEDA Safety Manual
	Typical Automotive Applications	ADAS Vision and Radar		Radio, V2X and Infotainment	Radar	Service-oriented gateway and domain controller

# SafeAssure Functional Safety Program

Launched in 2011, the NXP SafeAssure program aligns our development process to ISO 26262 across our businesses. The program is our corporate commitment to supporting functional safety through a safety-conscious culture, discipline and collaboration. It also:

- Simplifies the process of system compliance, with solutions designed to address the requirements of automotive and industrial functional safety standards
- Reduces the time and complexity required to develop safety systems that comply with ISO 26262 and IEC 61508 standards
- Supports the most stringent safety integrity levels (SILs), enabling designers to build with confidence
- Adheres to a zero-defect methodology from design to manufacturing to help ensure our products meet the stringent demands of safety applications

### **Functional Safety Standards**



**NXP Quality Foundation** 









### **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Power Management Specialised - PMIC category:

Click to view products by NXP manufacturer:

Other Similar products are found below:

AS3715-BWLM-00 P9145-I0NQGI SLG7NT4192VTR AS3729B-BWLM TLE92623QXV33XUMA1 LNBH25SPQR ADP5080ACBZ-1-RL MC32PF3000A6EP MB39C831QN-G-EFE2 MAX9959DCCQ+D MAX1932ETC+T MAX1856EUB+T STNRG011TR

IRPS5401MXI03TRP S6AE102A0DGN1B200 MMPF0100FDAEP MCZ33903DS5EK S6AE101A0DGNAB200 MCZ33903DS3EK

NCP6924CFCHT1G MAX17117ETJ+ MCZ33903DS3EKR2 L9916 L9915-CB MCZ33904D5EK MCZ33905DS3EK MMPF0100FCANES

MCZ33905DD3EK MMPF0100FBANES WM8325GEFL/V MCZ33903DP5EK MCZ33905DS5EK MCZ33903D3EK MCZ33904D5EKR2

MCZ33903DD5EK ADN8835ACPZ-R7 MCZ33903DP5EKR2 MCZ33903DP3EK MCZ33903DD3EK

MMPF0100FAAZES SLG7NT4198V MIC5164YMM P9180-00NHGI NCP6914AFCAT1G TLE9261QX TEA1998TS/1H

MAX881REUB+T TLE9262QX TLE8880TN