# Power MOSFET –20V, 137mΩ, –2.5A, Single P-Channel

This Power MOSFET is produced using ON Semiconductor's trench technology, which is specifically designed to minimize gate charge and low on resistance. This devices is suitable for applications with low gate charge driving or low on resistance requirements.

#### **Features**

- Low On-Resistance
- 1.8V drive
- ESD Diode-Protected Gate
- Pb-Free, Halogen Free and RoHS compliance

#### **Typical Applications**

- Load Switch
- Motor Driver

#### **SPECIFICATIONS**

#### **ABSOLUTE MAXIMUM RATING** at Ta = 25°C (Note 1)

Parameter	Symbol	Value	Unit
Drain to Source Voltage	VDSS	-20	V
Gate to Source Voltage	VGSS	±10	V
Drain Current (DC)	ID	-2.5	Α
Drain Current (Pulse) PW ≤ 10µs, duty cycle ≤ 1%	IDP	-10	Α
Power Dissipation When mounted on ceramic substrate (900mm²×0.8mm)	PD	1	W
Junction Temperature	Tj	150	°C
Storage Temperature	Tstg	-55 to +150	°C

Note 1: Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

#### THERMAL RESISTANCE RATINGS

Parameter	Symbol	Value	Unit
Junction to Ambient When mounted on ceramic substrate (900mm² × 0.8mm)	$R_{ heta JA}$	125	°C/W




#### ON Semiconductor®


www.onsemi.com

VDSS	R <sub>DS</sub> (on) Max	ID Max
	137mΩ@ –4.5V	
-20V	203mΩ@ –2.5V	-2.5A
	323mΩ@ –1.8V	

# ELECTRICAL CONNECTION P-Channel



#### PACKING TYPE: TL MARKING



#### ORDERING INFORMATION

See detailed ordering and shipping information on page 5 of this data sheet.


#### **ELECTRICAL CHARACTERISTICS** at Ta = 25°C (Note 2)


		` ,					
Parameter	Symbol	Conditions	Value			Unit	
Farameter	Syllibol	Conditions	min	typ	max	Ullit	
Drain to Source Breakdown Voltage	V(BR)DSS	I <sub>D</sub> =-1mA, V <sub>G</sub> S=0V	-20			V	
Zero-Gate Voltage Drain Current	IDSS	V <sub>DS</sub> =-20V, V <sub>GS</sub> =0V			-1	μА	
Gate to Source Leakage Current	IGSS	V <sub>GS</sub> =±8V, V <sub>DS</sub> =0V			±10	μΑ	
Gate Threshold Voltage	VGS(th)	V <sub>DS</sub> =-10V, I <sub>D</sub> =-1mA	-0.4		-1.4	V	
Forward Transconductance	gFS	V <sub>DS</sub> =-10V, I <sub>D</sub> =-1A		2.7		S	
	R <sub>DS</sub> (on)1	I <sub>D</sub> =-1A, V <sub>G</sub> S=-4.5V		105	137	mΩ	
Static Drain to Source On-State Resistance	R <sub>DS</sub> (on)2	I <sub>D</sub> =-0.5A, V <sub>G</sub> S=-2.5V		145	203	mΩ	
Resistance	R <sub>DS</sub> (on)3	I <sub>D</sub> =-0.1A, V <sub>G</sub> S=-1.8V		215	323	mΩ	
Input Capacitance	Ciss			250		pF	
Output Capacitance	Coss	V <sub>DS</sub> =-10V, f=1MHz		60		pF	
Reverse Transfer Capacitance	Crss			45		pF	
Turn-ON Delay Time	t <sub>d</sub> (on)			5.7		ns	
Rise Time	t <sub>r</sub>			11		ns	
Turn-OFF Delay Time	t <sub>d</sub> (off)	See specified Test Circuit		34		ns	
Fall Time	tf			20		ns	
Total Gate Charge	Qg			3.3		nC	
Gate to Source Charge	Qgs	V <sub>DS</sub> =-10V, V <sub>GS</sub> =-4.5V, I <sub>D</sub> =-2.5A		0.65		nC	
Gate to Drain "Miller" Charge	Qgd			0.72		nC	
Forward Diode Voltage	V <sub>SD</sub>	I <sub>S</sub> =-2.5A, V <sub>G</sub> S=0V		-0.87	-1.5	V	


Note 2 : Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted.


Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.


#### **Switching Time Test Circuit**




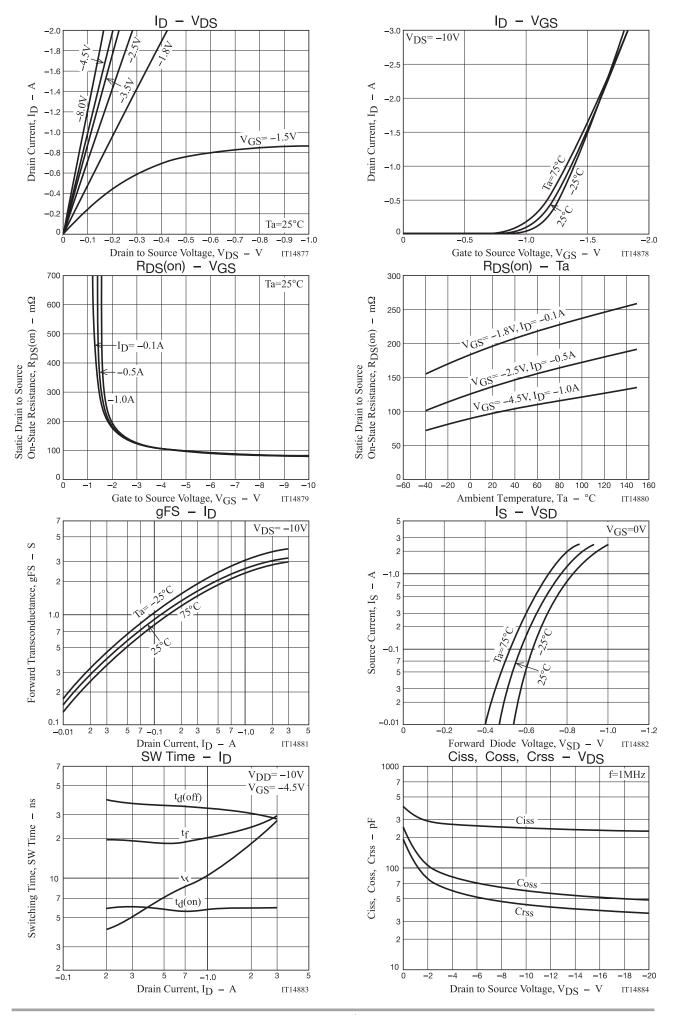

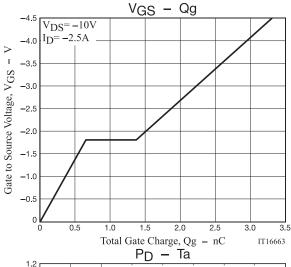

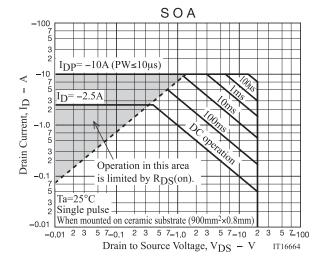


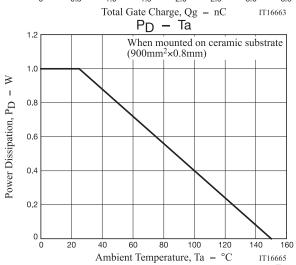

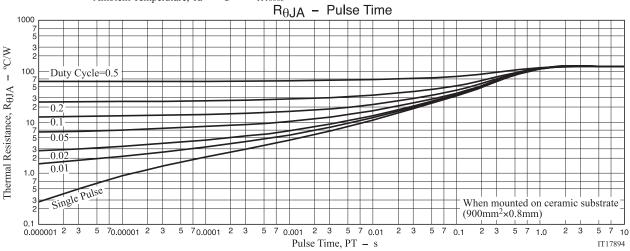

#### PACKAGE DIMENSIONS

Unit: mm CPH3 CASE 318BA ISSUE O

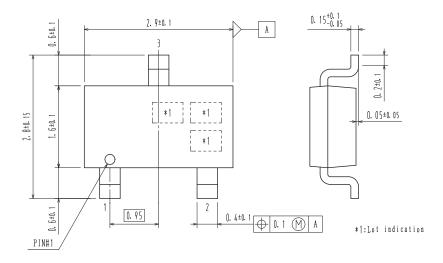


1 : Gate

2 : Source

3: Drain

#### Recommended Soldering Footprint



#### **ORDERING INFORMATION**

Device	Marking	Package	Shipping (Qty / Packing)	
CPH3356-TL-H	WN	CPH3 SC-59, SOT-23, TO-236	3,000 / Tape & Reel	
CPH3356-TL-W	VVIV	(Pb-Free / Halogen Free)		

<sup>†</sup> For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D. http://www.onsemi.com/pub\_link/Collateral/BRD8011-D.PDF

Note on usage: Since the CPH3356 is a MOSFET product, please avoid using this device in the vicinity of highly charged objects.

ON Semiconductor and the ON logo are registered trademarks of Semiconductor Components Industries, LLC (SCILLC) or its subsidiaries in the United States and/or other countries. SCILLC owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of SCILLC's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent re

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for MOSFET category:

Click to view products by ON Semiconductor manufacturer:

Other Similar products are found below:

614233C 648584F IRFD120 JANTX2N5237 FCA20N60\_F109 FDZ595PZ 2SK2545(Q,T) 405094E 423220D TPCC8103,L1Q(CM MIC4420CM-TR VN1206L SBVS138LT1G 614234A 715780A NTNS3166NZT5G SSM6J414TU,LF(T 751625C BUK954R8-60E NTE6400 SQJ402EP-T1-GE3 2SK2614(TE16L1,Q) 2N7002KW-FAI DMN1017UCP3-7 EFC2J004NUZTDG ECH8691-TL-W FCAB21350L1 P85W28HP2F-7071 DMN1053UCP4-7 NTE221 NTE222 NTE2384 NTE2903 NTE2941 NTE2945 NTE2946 NTE2960 NTE2967 NTE2969 NTE2976 NTE455 NTE6400A NTE2910 NTE2916 NTE2956 NTE2956 NTE2911 DMN2080UCB4-7 TK10A80W,S4X(S SSM6P69NU,LF DMP22D4UFO-7B