**ON Semiconductor** 

Is Now

# Onsemi

To learn more about onsemi<sup>™</sup>, please visit our website at <u>www.onsemi.com</u>

onsemi and ONSEMI. and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product factures, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and asfety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or by customer's technical experts. onsemi products and actal performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use onsemi products for any such unintended or unauthorized application, Buyer shall indemnify and hold onsemi and its officers, employees, subsidiari



#### **ON Semiconductor®** FDD86581-F085

# N-Channel PowerTrench<sup>®</sup> MOSFET

### **60 V, 25 A, 15 m**Ω

#### **Features**

- Typical  $R_{DS(on)}$  = 12.3 m $\Omega$  at  $V_{GS}$  = 10V,  $I_D$  = 25 A
- Typical Q<sub>g(tot)</sub> = 12.6 nC at V<sub>GS</sub> = 10V, I<sub>D</sub> = 25 A
- UIS Capability
- RoHS Compliant
- Qualified to AEC Q101

#### Applications

- Automotive Engine Control
- Powertrain Management
- Solenoid and Motor Drivers
- Electronic Steering
- Integrated Starter/Alternator
- Distributed Power Architectures and VRM
- Primary Switch for 12V Systems

#### **MOSFET Maximum Ratings** T<sub>1</sub> = 25°C unless otherwise noted.

Symbol	Parameter	Ratings	Units	
V <sub>DSS</sub>	Drain-to-Source Voltage		60	V
V <sub>GS</sub>	Gate-to-Source Voltage		±20	V
I <sub>D</sub>	Drain Current - Continuous (V <sub>GS</sub> =10) (Note 1)	T <sub>C</sub> = 25°C	25	^
	Pulsed Drain Current	T <sub>C</sub> = 25°C	See Figure 4	— A
E <sub>AS</sub>	Single Pulse Avalanche Energy	(Note 2)	14.5	mJ
P <sub>D</sub>	Power Dissipation		48.4	W
	Derate Above 25°C		0.32	W/ºC
T <sub>J</sub> , T <sub>STG</sub>	Operating and Storage Temperature		-55 to + 175	°C
$R_{\theta JC}$	Thermal Resistance, Junction to Case		3.1	°C/W
$R_{\theta JA}$	Maximum Thermal Resistance, Junction to Ambient	(Note 3)	52	°C/W

Notes:

- 1: Current is limited by bondwire configuration.
- 2: Starting T<sub>J</sub> = 25°C, L = 60µH, I<sub>AS</sub> = 22A, V<sub>DD</sub> = 60V during inductor charging and V<sub>DD</sub> = 0V during time in avalanche. 3:  $R_{0JA}$  is the sum of the junction-to-case and case-to-ambient thermal resistance, where the case thermal reference is defined as the solder mounting surface of the drain pins. R<sub>0JC</sub> is guaranteed by design, while R<sub>0JA</sub> is determined by the board design. The maximum rating presented here is based on mounting on a 1 in<sup>2</sup> pad of 2oz copper.

#### Package Marking and Ordering Information

Device Marking	Device	Package	Reel Size	Tape Width	Quantity
FDD86581	FDD86581-F085	D-PAK(TO-252)	13"	16mm	2500units



G

S


D

**D-PAK** 


(TO-252)

G


Symbol	Parameter	Test Conditions		Min.	Тур.	Max.	Units
Off Cha	aracteristics						
B <sub>VDSS</sub>	Drain-to-Source Breakdown Voltage	I <sub>D</sub> = 250μA,	V <sub>GS</sub> =0V	60	-	-	V
	Drain to Source Lookage Current	$V_{DS}$ =60V, $T_{J}$ = 25°C		-	-	1	μA
IDSS	Drain-to-Source Leakage Current	$V_{GS} = 0V$	$T_{\rm J}$ = 175°C (Note 4)	-	-	1	mA
I <sub>GSS</sub>	Gate-to-Source Leakage Current	$V_{GS} = \pm 20V$		-	-	±100	nA
On Cha	racteristics						
V <sub>GS(th)</sub>	Gate to Source Threshold Voltage	V <sub>GS</sub> = V <sub>DS</sub> , I <sub>D</sub> = 250μA		2.0	2.8	4.0	V
	Drain to Source On Resistance	I <sub>D</sub> = 25A,	T <sub>.1</sub> = 25 <sup>o</sup> C	-	12.3	15	mΩ
R <sub>DS(on)</sub>			$T_{\rm J}$ = 175°C (Note 4)	-	24.4	30	mΩ
-	ic Characteristics				000		-5
C <sub>iss</sub>	Input Capacitance	V <sub>DS</sub> = 30V, V	V <sub>GS</sub> = 0V,	-	880	-	pF
C <sub>oss</sub>	Output Capacitance	f = 1MHz	-	-	280 15	-	pF
C <sub>rss</sub>	Reverse Transfer Capacitance	V <sub>GS</sub> = 0.5V, f = 1MHz		-	-	-	pF
R <sub>g</sub>	Gate Resistance		e) (	-	3.1 12.6	- 19	Ω nC
Q <sub>g(ToT)</sub>	Total Gate Charge Threshold Gate Charge	$V_{GS} = 0 \text{ to } 10V$ $V_{DD} = 30V$		-	12.0	-	nC
Q <sub>g(th)</sub>	Gate-to-Source Gate Charge	$V_{GS}$ = 0 to 2	V I <sub>D</sub> = 25A	-	4.3	-	nC
()				-			
	Gate-to-Drain "Miller" Charge			-	2.8	-	nC
	Gate-to-Drain "Miller" Charge				2.8	-	nC
Q <sub>gd</sub> Switchi	Gate-to-Drain "Miller" Charge ng Characteristics Turn-On Time	_		-	-	- 21	nC
Q <sub>gd</sub> Switchi t <sub>on</sub> t <sub>d(on)</sub>	Gate-to-Drain "Miller" Charge ng Characteristics Turn-On Time Turn-On Delay		L = 25A		2.8 - 7.5	-	nC ns ns
Q <sub>gd</sub> Switchi t <sub>on</sub> t <sub>d(on)</sub> t <sub>r</sub>	Gate-to-Drain "Miller" Charge ng Characteristics Turn-On Time Turn-On Delay Rise Time	V <sub>DD</sub> = 30V, V <sub>CS</sub> = 10V.	I <sub>D</sub> = 25A, R <sub>GEN</sub> = 6Ω	-	- 7.5 6.5	- 21	nC ns ns ns
$Q_{gd}$ Switchi $t_{on}$ $t_{d(on)}$ $t_r$ $t_{d(off)}$	Gate-to-Drain "Miller" Charge ng Characteristics Turn-On Time Turn-On Delay Rise Time Turn-Off Delay	V <sub>DD</sub> = 30V, V <sub>GS</sub> = 10V,	I <sub>D</sub> = 25A, R <sub>GEN</sub> = 6Ω	-	- 7.5 6.5 14.6	- 21	nC ns ns ns ns
Q <sub>gd</sub> Switchi t <sub>on</sub> t <sub>d(on)</sub> t <sub>r</sub> t <sub>d(off)</sub> t <sub>f</sub>	Gate-to-Drain "Miller" Charge ng Characteristics Turn-On Time Turn-On Delay Rise Time	V <sub>DD</sub> = 30V, V <sub>GS</sub> = 10V,	I <sub>D</sub> = 25A, R <sub>GEN</sub> = 6Ω		- 7.5 6.5	- 21	nC ns ns ns
$\begin{array}{c} \mathbf{Q}_{gd} \\ \textbf{Switchi} \\ \textbf{t}_{on} \\ \textbf{t}_{d(on)} \\ \textbf{t}_{r} \\ \textbf{t}_{d(off)} \\ \textbf{t}_{f} \\ \textbf{t}_{off} \\ \end{array}$	Gate-to-Drain "Miller" Charge	V <sub>DD</sub> = 30V, V <sub>GS</sub> = 10V,	I <sub>D</sub> = 25A, R <sub>GEN</sub> = 6Ω		- 7.5 6.5 14.6 4.2	- 21 - - -	nC ns ns ns ns ns
$Q_{gd}$ Switchi $t_{on}$ $t_{d(on)}$ $t_r$ $t_{d(off)}$ $t_f$ $t_{off}$ Drain-S	Gate-to-Drain "Miller" Charge         ng Characteristics         Turn-On Time         Turn-On Delay         Rise Time         Turn-Off Delay         Fall Time         Turn-Off Time	V <sub>GS</sub> = 10V,	R <sub>GEN</sub> = 6Ω		- 7.5 6.5 14.6 4.2	- 21 - - -	nC ns ns ns ns ns
$Q_{gd}$ Switchi $t_{on}$ $t_{d(on)}$ $t_r$ $t_{d(off)}$ $t_f$ $t_{off}$	Gate-to-Drain "Miller" Charge         ng Characteristics         Turn-On Time         Turn-On Delay         Rise Time         Turn-Off Delay         Fall Time         Turn-Off Time	$V_{DD} = 30V, V_{GS} = 10V,$ $\frac{I_{SD} = 25A, V_{I_{SD}}}{I_{SD} = 12.5A}$	R <sub>GEN</sub> = 6Ω / <sub>GS</sub> = 0V		- 7.5 6.5 14.6 4.2 -	- 21 - - - 28	nC ns ns ns ns ns
$Q_{gd}$ Switchi $t_{on}$ $t_{d(on)}$ $t_r$ $t_{d(off)}$ $t_f$ $t_{off}$ Drain-S	Gate-to-Drain "Miller" Charge         ng Characteristics         Turn-On Time         Turn-On Delay         Rise Time         Turn-Off Delay         Fall Time         Turn-Off Time	V <sub>GS</sub> = 10V,	$R_{GEN} = 6\Omega$ $/_{GS} = 0V$ $/_{GS} = 0V$ $I_{F} = 25A,$		2.8 - 7.5 6.5 14.6 4.2 -	- 21 - - 28 1.3	nC ns ns ns ns ns V

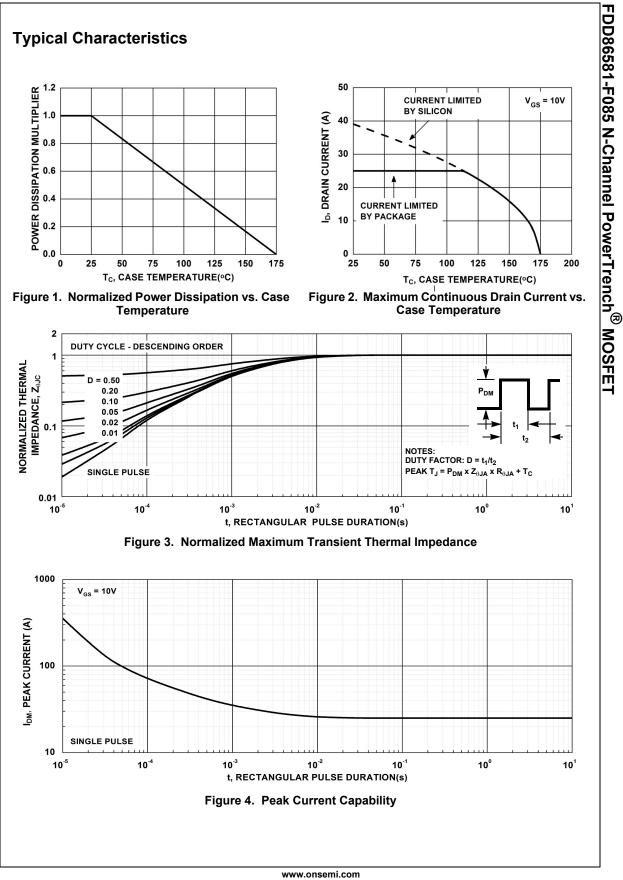

w.onsemi.c 3

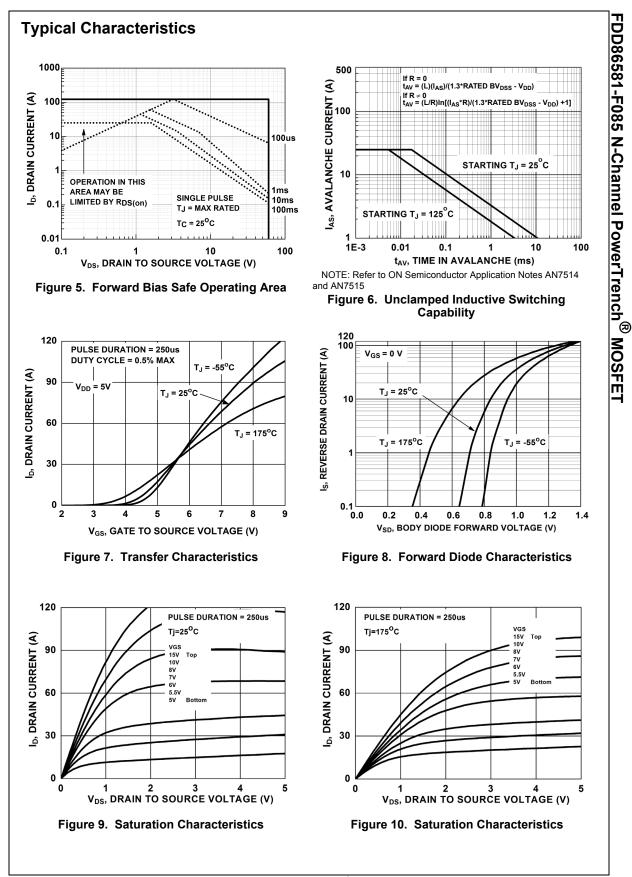

www.onsemi.com

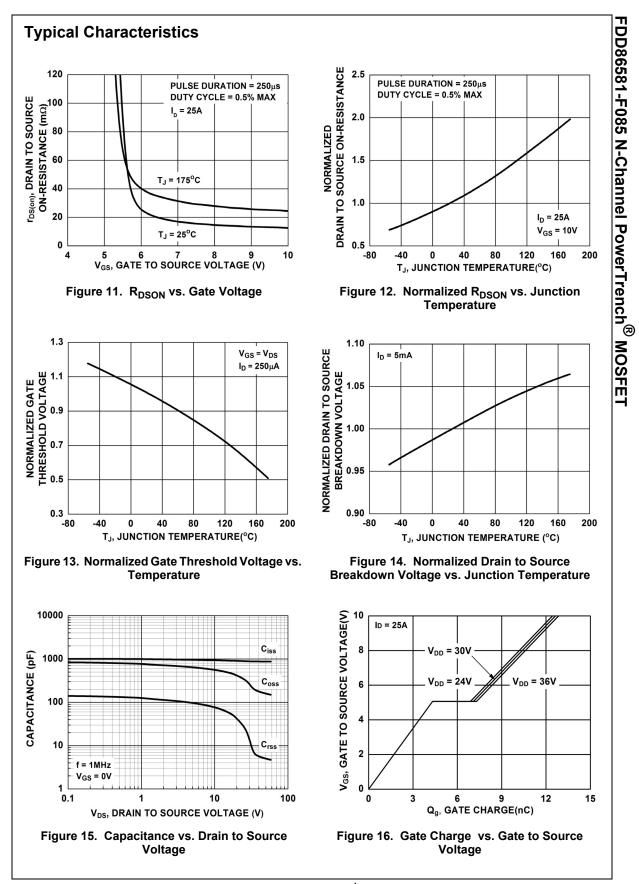

www.onsemi.com 5

ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <u>www.onsemi.com/site/pdf/Patent-Marking.pdf</u>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor haves, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such uninten

#### PUBLICATION ORDERING INFORMATION

#### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800–282–9855 Toll Free USA/Canada Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910

Japan Customer Focus Center Phone: 81–3–5817–1050 ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for MOSFET category:

Click to view products by ON Semiconductor manufacturer:

Other Similar products are found below :

614233C 648584F IRFD120 JANTX2N5237 FCA20N60\_F109 FDZ595PZ 2SK2545(Q,T) 405094E 423220D TPCC8103,L1Q(CM MIC4420CM-TR VN1206L SBVS138LT1G 614234A 715780A NTNS3166NZT5G SSM6J414TU,LF(T 751625C BUK954R8-60E NTE6400 SQJ402EP-T1-GE3 2SK2614(TE16L1,Q) 2N7002KW-FAI DMN1017UCP3-7 EFC2J004NUZTDG ECH8691-TL-W FCAB21350L1 P85W28HP2F-7071 DMN1053UCP4-7 NTE221 NTE222 NTE2384 NTE2903 NTE2941 NTE2945 NTE2946 NTE2960 NTE2967 NTE2969 NTE2976 NTE455 NTE6400A NTE2910 NTE2916 NTE2956 NTE2911 DMN2080UCB4-7 TK10A80W,S4X(S SSM6P69NU,LF DMP22D4UF0-7B