

Sheathed automatic centre punch

257.G


- Simply press the end to release spring impact.
 - Impact adjustable from 15 to 25 kg by turning the end.
 - Ergonomic Facom handle.
 - Tip hardened to 57-60 HRc.
- ΔΔ : 175 g.



263.G Sheathed chisels

- Engineers chisels.
- Hardness :
 - Edge = 57 - 60 HRc
 - Striking head = 36 - 44 HRc.
- Angle of edge : 60°.

Ref	L mm	A mm	Ø B mm	ΔΔ g
263.G19	190	15	12	165
263.G20	200	20	16	305
263.G22	220	25	18	415

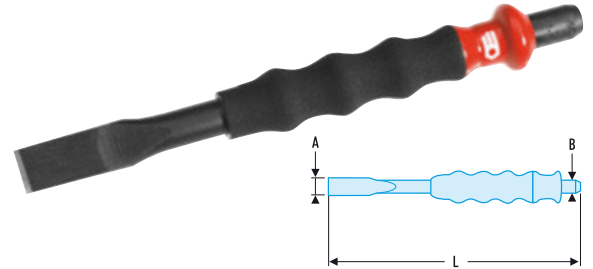


Sheathed cape chisels

265.G18

- Hardness :
 - Edge : 57-60 HRc.
 - Striking head : 36- 44 HRc.

Ref	L mm	A mm	Ø B mm	ΔΔ g
265.G18	180	10	10	110

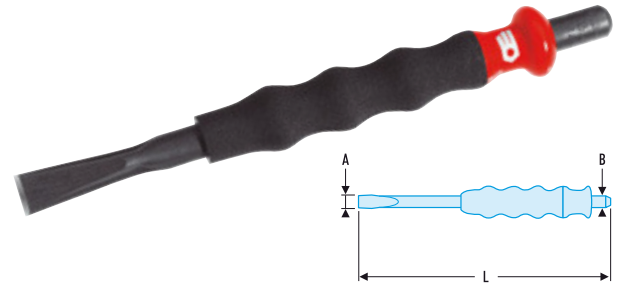

Set of sheathed tools

263.GJ4

- Comprising :
 - Flat chisels 263.G 19, 20, 22 .
 - Cape chisel 265.G18
 - Supplied in a cardboard box.
- ΔΔ : 1.005 kg.D : 1,005 kg.



Sheathed drift punch, flat chisel and cape chisel modules

MOD.CG1

- 249.G 12-14-16 mm.
 - 263.G 19-20-22.
 - 265.G 18.
 - Tray PL.611.
- ΔΔ : 3 kg.



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [facom](#) manufacturer:

Other Similar products are found below :

[92A.5,5](#) [ARB.5.5X40](#) [ANXR10X75](#) [AEF.J6](#) [AEF.J1](#) [EH.107](#) [EH.103](#) [256.2.5](#) [MT.J3](#) [986058](#) [75.10](#) [PB.MTJ5](#) [84E.J1](#) [455B](#) [440.19](#)
[44.6X7](#) [440.21](#) [R.306-25D](#) [R.217](#) [R.5](#) [J.13LA](#) [431.LE](#) [425.E](#) [R.216](#) [601](#) [AEF.1,5X35](#) [AEX.J2](#) [AEX.9X75](#) [AEX.7X35](#) [251A.2.5](#) [HB.2B](#)
[440.20](#) [435.E](#) [432.LMT](#) [44.12X13](#) [440.5H](#) [440.22](#) [R.304DA](#) [427.MT](#) [113A.10C](#) [251A.3](#) [AEF.1,8X35](#) [75.7](#) [440.30](#) [440.18](#) [440.8](#) [R.4](#)
[J.19LA](#) [44.JE8](#) [417.PE](#)