ON Semiconductor

Is Now

Onsemi

To learn more about onsemi[™], please visit our website at <u>www.onsemi.com</u>

onsemi and ONSEMI. and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product factures, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and asfety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or by customer's technical experts. onsemi products and actal performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use onsemi products for any such unintended or unauthorized application, Buyer shall indemnify and hold onsemi and its officers, employees, subsidiari



ON Semiconductor®

FDMC7692 N-Channel Power Trench[®] MOSFET General Description 30 V, 13.3 A, 8.5 mΩ This N-Channel MC

- ·

Features


- Max $r_{DS(on)}$ = 8.5 m Ω at V_{GS} = 10 V, I_D = 13.3 A
- Max r_{DS(on)} = 11.5 mΩ at V_{GS} = 4.5 V, I_D = 10.6 A
- High performance technology for extremely low r_{DS(on)}
- Termination is Lead-free and RoHS Compliant



This N-Channel MOSFET is produced using ON Semiconductor's advanced Power Trench[®] process that has been especially tailored to minimize the on-state resistance. This device is well suited for Power Management and load switching applications common in Notebook Computers and Portable Battery Packs.

Application

- DC DC Buck Converters
- Notebook battery power management
- Load switch in Notebook

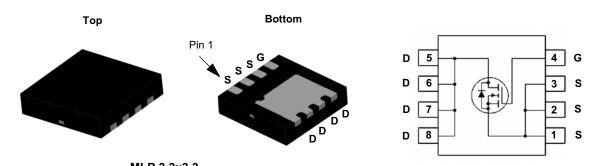

MLP 3.3x3.3

MOSFET Maximum Ratings T_A = 25 °C unless otherwise noted

Symbol	Parameter			Ratings	Units	
V _{DS}	Drain to Source Voltage			30	V	
V _{GS}	Gate to Source Voltage			±20	V	
I _D	Drain Current -Continuous (Package limited)	T _C = 25 °C		16		
	-Continuous	T _A = 25 °C	(Note 1a)	13.3	Α	
	-Pulsed			40		
E _{AS}	Single Pulse Avalanche Energy		(Note 3)	58	mJ	
P _D	Power Dissipation	T _C = 25 °C		29		
	Power Dissipation	T _A = 25 °C	(Note 1a)	2.3		
T _J , T _{STG}	Operating and Storage Junction Temperature Range			-55 to +150	°C	

Thermal Characteristics

$R_{ ext{ heta}JC}$	Thermal Resistance, Junction to Case	4.3	°C/W
$R_{ ext{ heta}JA}$	Thermal Resistance, Junction to Ambient (Note 1a)	53	0/10

Package Marking and Ordering Information

Device Marking	Device	Package	Reel Size	Tape Width	Quantity
FDMC7692	FDMC7692	MLP 3.3x3.3	13 "	12 mm	3000 units

eristics rain to Source Breakdown Voltage reakdown Voltage Temperature coefficient ero Gate Voltage Drain Current cate to Source Leakage Current eristics ero to Source Threshold Voltage	$I_{D} = 250 \ \mu\text{A}, \ V_{GS} = 0 \ V$ $I_{D} = 250 \ \mu\text{A}, \ \text{referenced to } 25 \ ^{\circ}\text{C}$ $V_{DS} = 24 \ V, \ V_{GS} = 0 \ V$ $T_{J} = 125 \ ^{\circ}\text{C}$ $V_{GS} = 20 \ V, \ V_{DS} = 0 \ V$	30	16		V mV/°C	
reakdown Voltage Temperature coefficient ero Gate Voltage Drain Current cate to Source Leakage Current eristics	$I_D = 250 \ \mu$ A, referenced to 25 °C $V_{DS} = 24 \ V, V_{GS} = 0 \ V$	30	16			
ero Gate Voltage Drain Current ate to Source Leakage Current	$I_D = 250 \ \mu$ A, referenced to 25 °C $V_{DS} = 24 \ V, V_{GS} = 0 \ V$		16		mV/°C	
ate to Source Leakage Current						
eristics	$V_{GS} = 20 \text{ V}, V_{DS} = 0 \text{ V}$			1 250	μA	
				100	nA	
ate to Source Threshold Voltage	V _{GS} = V _{DS} , I _D = 250 μA 1.		1.9	3.0	V	
ate to Source Threshold Voltage emperature Coefficient	$I_D = 250 \ \mu$ A, referenced to 25 °C		-6		mV/°C	
Static Drain to Source On Resistance	V _{GS} = 10 V, I _D = 13.3 A	7.2		8.5	1	
	V _{GS} = 4.5 V, I _D = 10.6 A		9.5	11.5	mΩ	
	V _{GS} = 10 V, I _D = 13.3 A, T _J = 125 °C		9.5	12.0	0	
orward Transconductance	V _{DD} = 5 V, I _D = 13.3 A		60		S	
aracteristics						
put Capacitance	$V_{DS} = 15 V, V_{GS} = 0 V,$		1260	1680	pF	
utput Capacitance			480	635	pF	
everse Transfer Capacitance			65	100	pF	
ate Resistance			0.9	2.4	Ω	
haracteristics						
urn-On Delay Time			9	18	ns	
lise Time	V _{DD} = 15 V, I _D = 13.3 A,		4	10	ns	
urn-Off Delay Time	V_{GS} = 10 V, R_{GEN} = 6 Ω		21	33	ns	
all Time	-		3	10	ns	
otal Gate Charge	V _{GS} = 0 V to 10 V		21	29	nC	
otal Gate Charge	V _{GS} = 0 V to 4.5 V V _{DD} = 15 V		10	14	nC	
otal Gate Charge	I _D = 13.3 A		5		nC	
ate to Drain "Miller" Charge	-		3		nC	
e Diode Characteristics			<u></u> t		-#	
Source to Drain Diode Forward Voltage	V _{GS} = 0 V, I _S = 13.3 A (Note 2)		0.86	1.2	V	
	$V_{GS} = 0 V, I_S = 1.9 A$ (Note 2)		0.75	1.2		
everse Recovery Time	1 = 13.3 A di/dt = 100 A/we		24	38	ns	
Reverse Recovery Charge			7	14	nC	
	aracteristics put Capacitance utput Capacitance everse Transfer Capacitance ate Resistance haracteristics urn-On Delay Time ise Time urn-Off Delay Time all Time otal Gate Charge otal Gate Charge otal Gate Charge ate to Drain "Miller" Charge ate to Drain "Miller" Charge everse Recovery Time	tatic Drain to Source On Resistance $V_{GS} = 4.5$ V, $I_D = 10.6$ A $V_{GS} = 10$ V, $I_D = 13.3$ A, $T_J = 125$ °Cprward Transconductance $V_{DD} = 5$ V, $I_D = 13.3$ Aaracteristicsput Capacitance $V_{DS} = 15$ V, $V_{GS} = 0$ V, f = 1 MHzeverse Transfer Capacitance $V_{DS} = 15$ V, $V_{GS} = 0$ V, f = 1 MHzate Resistance $V_{DD} = 15$ V, $I_D = 13.3$ A, $V_{GS} = 10$ V, $R_{GEN} = 6 \Omega$ haracteristicsurn-On Delay Timeise Time $V_{GS} = 0$ V to 10 V, $V_{GS} = 0$ V to 4.5 V, $I_D = 13.3$ A, $I_D = 13.3$ Aate Charge $V_{GS} = 0$ V to 10 V, $I_D = 13.3$ Aotal Gate Charge $V_{GS} = 0$ V to 4.5 V, $I_D = 13.3$ Ae Diode Characteristicsource to Drain Diode Forward Voltage $V_{GS} = 0$ V, $I_S = 13.3$ A, $V_{GS} = 0$ V, $I_S = 1.9$ A, $(Note 2)$ everse Recovery Time $I_T = 13.3$ A, di/dt = 100 A/us	tatic Drain to Source On Resistance $V_{GS} = 4.5 \text{ V}, I_D = 10.6 \text{ A}$ $V_{GS} = 10 \text{ V}, I_D = 13.3 \text{ A}, T_J = 125 ^{\circ}\text{C}$ $V_{DD} = 5 \text{ V}, I_D = 13.3 \text{ A}$ aracteristicsput Capacitance $V_{DS} = 15 \text{ V}, V_{GS} = 0 \text{ V}, f = 1 \text{ MHz}$ automatic capacitanceate ResistanceNumOn Delay Timeise TimeV_{DD} = 15 V, I_D = 13.3 A, UTN-ON Delay Timeall TimeV_{GS} = 0 V to 10 VV_{GS} = 0 V to 10 VV_{GS} = 0 V to 10 VV_{DD} = 15 V, I_D = 13.3 A, UTN-ON Delay Timeall TimeV_{GS} = 0 V to 10 VV_{GS} = 0 V to 10 VV_{GS} = 0 V to 4.5 VUp = 13.3 AIn E Diode Characteristicsource to Drain Diode Forward VoltageV_{GS} = 0 V, I_S = 13.3 A (Note 2)V_{GS} = 0 V, I_S = 1.9 A (Note 2)everse Recovery TimeIn = 13 3 A di/dt = 100 A/us	tatic Drain to Source On Resistance $V_{GS} = 4.5$ V, $I_D = 10.6$ A 9.5 $V_{GS} = 10$ V, $I_D = 13.3$ A, $T_J = 125$ °C 9.5 poward Transconductance $V_{DD} = 5$ V, $I_D = 13.3$ A 60 aracteristicsput Capacitance $V_{DS} = 15$ V, $V_{GS} = 0$ V, 1260 utput Capacitance $V_{DS} = 15$ V, $V_{GS} = 0$ V, 480 everse Transfer Capacitance 65 65 ate Resistance 0.9 480 m-On Delay Time 0.9 65 ise Time $V_{DD} = 15$ V, $I_D = 13.3$ A, 4 urn-Off Delay Time $V_{GS} = 10$ V, $R_{GEN} = 6$ 21 all Time $V_{GS} = 0$ V to 10 V 21 otal Gate Charge $V_{GS} = 0$ V to 4.5 V 10 otal Gate Charge $V_{GS} = 0$ V to 4.5 V $I_D = 13.3$ A 5 ate to Drain "Miller" Charge $V_{GS} = 0$ V, $I_S = 13.3$ A $Note 2$ 0.86 purce to Drain Diode Forward Voltage $V_{GS} = 0$ V, $I_S = 1.9$ A $(Note 2)$ 0.75 everse Recovery Time $I_r = 13.3$ A $I_r = 13.3$ A $I_r = 100$ A/us 24	tatic Drain to Source On Resistance $V_{GS} = 4.5 \text{ V}, \text{ I}_D = 10.6 \text{ A}$ 9.5 11.5 $V_{GS} = 10 \text{ V}, \text{ I}_D = 13.3 \text{ A}, \text{ T}_J = 125 ^{\circ}\text{C}$ 9.5 12.0 porward Transconductance $V_{DD} = 5 \text{ V}, \text{ I}_D = 13.3 \text{ A}$ 60 aracteristics put Capacitance $V_{DD} = 5 \text{ V}, \text{ I}_D = 13.3 \text{ A}$ 60 dutput Capacitance utput Capacitance $V_{DS} = 15 \text{ V}, \text{ V}_{GS} = 0 \text{ V}, \text{ f} = 1 \text{ MHz}$ 65 beta capacitance utput Capacitance dutput Capacitance beta capacitance the Resistance bar acteristics gene 15 V, I_D = 13.3 A, the distribution of the Resistance Marce and the Resistance young = 15 V, I_D = 13.3 A, the Resistance ourse Time Jun-On Delay Time gen = 15 V, I_D = 13.3 A, the Resistance Jun-Off Delay Time Jun = 10 V, R_GEN = 6 Ω all Time Jun = 10 V, R_GEN = 6 Ω ate to Drain "Miller" Charge	

00000





2. Pulse Test: Pulse Width < 300 $\mu s,$ Duty cycle < 2.0 %.

ط^ت


3. E_{AS} of 58 mJ is based on starting T_J = 25 °C, L = 1 mH, I_{AS} = 10.8 A, V_{DD} = 27 V, V_{GS} = 10 V. 100% test at L = 0.1 mH, I_{AS} = 21 A.

www.onsemi.com 2

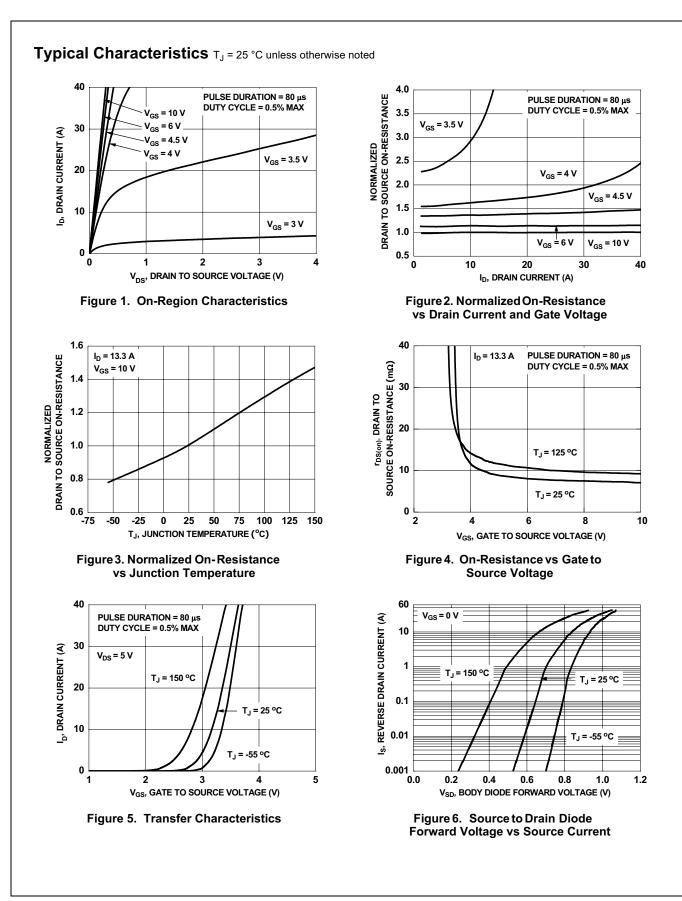

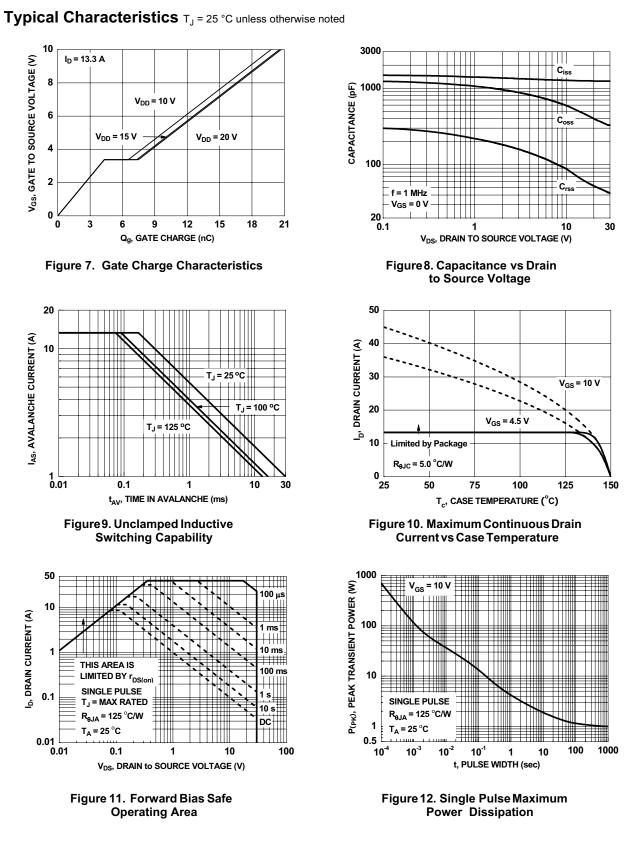

FDMC7692 N-Channel Power Trench[®] MOSFET

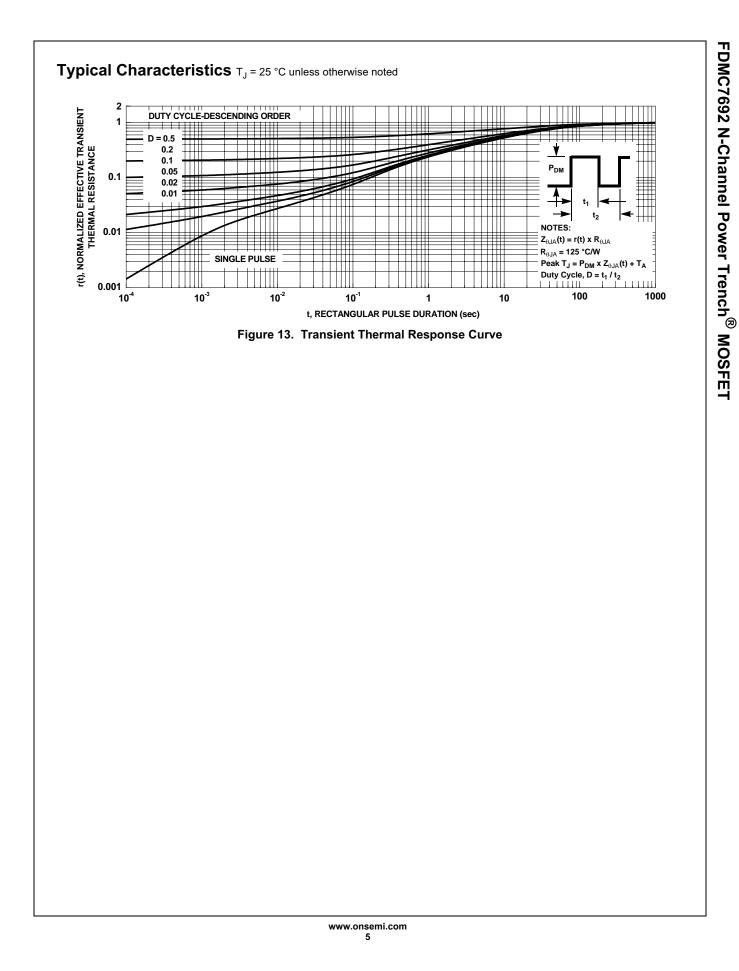

ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <u>www.onsemi.com/site/pdf/Patent-Marking.pdf</u>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor haves, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such uninten

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800–282–9855 Toll Free USA/Canada Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910

Japan Customer Focus Center Phone: 81–3–5817–1050 ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for MOSFET category:

Click to view products by ON Semiconductor manufacturer:

Other Similar products are found below :

614233C 648584F IRFD120 JANTX2N5237 FCA20N60_F109 FDZ595PZ 2SK2545(Q,T) 405094E 423220D TPCC8103,L1Q(CM MIC4420CM-TR VN1206L SBVS138LT1G 614234A 715780A NTNS3166NZT5G SSM6J414TU,LF(T 751625C BUK954R8-60E NTE6400 SQJ402EP-T1-GE3 2SK2614(TE16L1,Q) 2N7002KW-FAI DMN1017UCP3-7 EFC2J004NUZTDG ECH8691-TL-W FCAB21350L1 P85W28HP2F-7071 DMN1053UCP4-7 NTE221 NTE222 NTE2384 NTE2903 NTE2941 NTE2945 NTE2946 NTE2960 NTE2967 NTE2969 NTE2976 NTE455 NTE6400A NTE2910 NTE2916 NTE2956 NTE2911 DMN2080UCB4-7 TK10A80W,S4X(S SSM6P69NU,LF DMP22D4UF0-7B