ON Semiconductor

Is Now

Onsemi

To learn more about onsemi[™], please visit our website at <u>www.onsemi.com</u>

onsemi and ONSEMI. and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product factures, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and asfety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or by customer's technical experts. onsemi products and actal performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use onsemi products for any such unintended or unauthorized application, Buyer shall indemnify and hold onsemi and its officers, employees, subsidiari



ON Semiconductor®

FDS8884 N-Channel PowerTrench[®] MOSFET

30V, 8.5A, 23m Ω General Descriptions


This N-Channel MOSFET has been designed specifically to improve the overall efficiency of DC/DC converters using either synchronous or conventional switching PWM controllers. It has been optimized for low gate charge, low $r_{\mbox{DS}(on)}$ and fast switching speed.



Features

- Max $r_{DS(on)} = 23m\Omega$ at $V_{GS} = 10V$, $I_D = 8.5A$
- Max $r_{DS(on)} = 30m\Omega$ at $V_{GS} = 4.5V$, $I_D = 7.5A$
- Low gate charge
- 100% R_G Tested
- RoHS Compliant





MOSFET Maximum Ratings T_A = 25°C unless otherwise noted

Symbol	Parameter	Ratings	Units
V _{DS}	Drain to Source Voltage	30	V
V _{GS}	Gate to Source Voltage	±20	V
	Drain Current Continuous (Not	e 1a) 8.5	Α
D	Pulsed	40	Α
E _{AS}	Single Pulse Avalanche Energy (No	ote 2) 32	mJ
Р	Power dissipation	2.5	W
PD	Derate above 25°C	20	mW/ºC
T _J , T _{STG}	Operating and Storage Temperature	-55 to 150	°C

Thermal Characteristics

$R_{\theta JA}$	Thermal Resistance, Junction to Ambient	(Note 1a)	50	°C/W
R_{\thetaJA}	Thermal Resistance, Junction to Case	(Note 1)	25	°C/W


Package Marking and Ordering Information

Device Marking	Device	Package	Reel Size	Tape Width	Quantity
FDS8884	FDS8884	SO-8	330mm	12mm	2500 units


©2006 Semiconductor Components Industries, LLC. October-2017, Rev. 1

Symbol	Parameter	Test Conditions	Min	Тур	Max	Units
Off Chara	acteristics	·			•	
BV _{DSS}	Drain to Source Breakdown Voltage	I _D = 250μA, V _{GS} = 0V	30			V
∆BV _{DSS}	Breakdown Voltage Temperature	$I_D = 250 \mu A$, referenced to				
ΔT_J	Coefficient	25°C		23		mV/ºC
.	Zero Gate Voltage Drain Current	V _{DS} = 24V			1	μA
DSS	Zero Gale Vollage Drain Gurrent	$V_{GS} = 0V$ $T_J = 125^{\circ}C$			250	μΛ
GSS	Gate to Source Leakage Current	$V_{GS} = \pm 20V$			±100	nA
On Chara	acteristics (Note 3)					
V _{GS(th)}	Gate to Source Threshold Voltage	V _{GS} = V _{DS} , I _D = 250μA	1.2	1.7	2.5	V
$\Delta V_{GS(th)}$	Gate to Source Threshold Voltage	$I_{\rm D} = 250 \mu A$, referenced to		10		
ΔT_{J}	Temperature Coefficient	25°C		-4.9		mV/ºC
		V _{GS} = 10V, I _D = 8.5A,		19	23	
DS(on)	Drain to Source On Resistance	$V_{GS} = 4.5V$, $I_{D} = 7.5A$,		23	30	mΩ
DS(01)		$V_{GS} = 10V, I_D = 8.5A, T_J = 125^{\circ}C$		26	32	- 11152
Dynamic	Characteristics					
C _{iss}	Input Capacitance			475	635	pF
C _{oss}	Output Capacitance	$V_{DS} = 15V, V_{GS} = 0V,$		100	135	pF
C _{rss}	Reverse Transfer Capacitance	f = 1MHz		65	100	pF
R _G	Gate Resistance	f = 1MHz		0.9	1.6	Ω
	g Characteristics (Note 3) Turn-On Delay Time			5	10	ns
t _{d(on)}	Turn-On Delay Time Rise Time	V _{DD} = 15V, I _D = 8.5A V _{GS} = 10V, R _{GS} = 33Ω		9	18	ns
d(on) tr d(off)	Turn-On Delay Time Rise Time Turn-Off Delay Time			9 42	18 68	ns ns
r d(on) d(off)	Turn-On Delay Time Rise Time	— V _{GS} = 10V, R _{GS} = 33Ω —		9	18	ns
r d(on) d(off)	Turn-On Delay Time Rise Time Turn-Off Delay Time			9 42	18 68	ns ns
d(on) r d(off) f Qg	Turn-On Delay Time Rise Time Turn-Off Delay Time Fall Time	$V_{GS} = 10V, R_{GS} = 33\Omega$ $V_{DS} = 15V, V_{GS} = 10V$ $I_D = 8.5A$		9 42 21	18 68 34	ns ns ns
id(on) r id(off) if Qg Qg	Turn-On Delay Time Rise Time Turn-Off Delay Time Fall Time Total Gate Charge	$V_{GS} = 10V, R_{GS} = 33\Omega$ V _{DS} = 15V, V _{GS} = 10V		9 42 21 9.2	18 68 34 13	ns ns ns nC
id(on) ir id(off) if Q _g Q _g	Turn-On Delay Time Rise Time Turn-Off Delay Time Fall Time Total Gate Charge Total Gate Charge	$V_{GS} = 10V, R_{GS} = 33\Omega$ $V_{DS} = 15V, V_{GS} = 10V$ $I_{D} = 8.5A$ $V_{DS} = 15V, V_{GS} = 5V$		9 42 21 9.2 5.0	18 68 34 13	ns ns nS nC nC
t _{d(on)} tr tr Qg Qg Qgs Qgd	Turn-On Delay Time Rise Time Turn-Off Delay Time Fall Time Total Gate Charge Total Gate Charge Gate to Source Gate Charge	$V_{GS} = 10V, R_{GS} = 33\Omega$ $V_{DS} = 15V, V_{GS} = 10V$ $I_{D} = 8.5A$ $V_{DS} = 15V, V_{GS} = 5V$		9 42 21 9.2 5.0 1.5	18 68 34 13	ns ns nC nC nC
$d_{(on)}$ r $d_{(off)}$ f Q_g Q_g Q_{gs} Q_{gd} Drain-So	Turn-On Delay Time Rise Time Turn-Off Delay Time Fall Time Total Gate Charge Total Gate Charge Gate to Source Gate Charge Gate to Drain Charge urce Diode Characteristics	$V_{GS} = 10V, R_{GS} = 33\Omega$ $V_{DS} = 15V, V_{GS} = 10V$ $I_{D} = 8.5A$ $V_{DS} = 15V, V_{GS} = 5V$		9 42 21 9.2 5.0 1.5	18 68 34 13	ns ns nC nC nC
t _{d(on)} tr (d(off) tf Qg Qg Qgs Qgs Qgd	Turn-On Delay Time Rise Time Turn-Off Delay Time Fall Time Total Gate Charge Total Gate Charge Gate to Source Gate Charge Gate to Drain Charge	$V_{GS} = 10V, R_{GS} = 33\Omega$ $V_{DS} = 15V, V_{GS} = 10V$ $I_{D} = 8.5A$ $V_{DS} = 15V, V_{GS} = 5V$ $I_{D} = 8.5A$		9 42 21 9.2 5.0 1.5 2.0	18 68 34 13 7	ns ns nC nC nC nC
t _{d(on)} tr d _(off) tr Q _g Q _g Q _{gs} Q _{gd} Drain-So	Turn-On Delay Time Rise Time Turn-Off Delay Time Fall Time Total Gate Charge Total Gate Charge Gate to Source Gate Charge Gate to Drain Charge urce Diode Characteristics	$V_{GS} = 10V, R_{GS} = 33\Omega$ $V_{DS} = 15V, V_{GS} = 10V$ $I_{D} = 8.5A$ $V_{DS} = 15V, V_{GS} = 5V$ $I_{D} = 8.5A$ $I_{SD} = 8.5A$		9 42 21 9.2 5.0 1.5 2.0 0.9	18 68 34 13 7 1.25	ns ns nC nC nC v


FDS8884 N-Channel PowerTrench[®] MOSFET

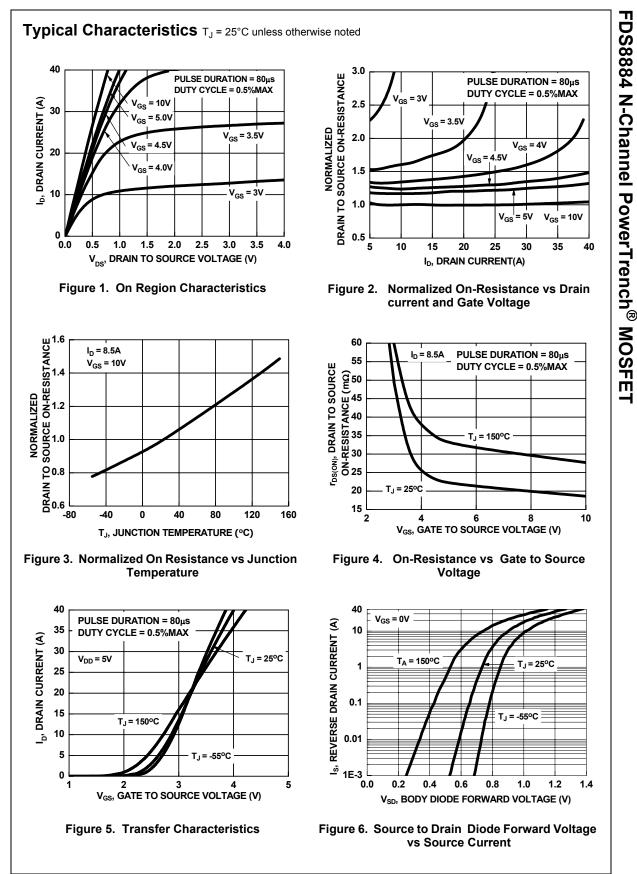

www.onsemi.com

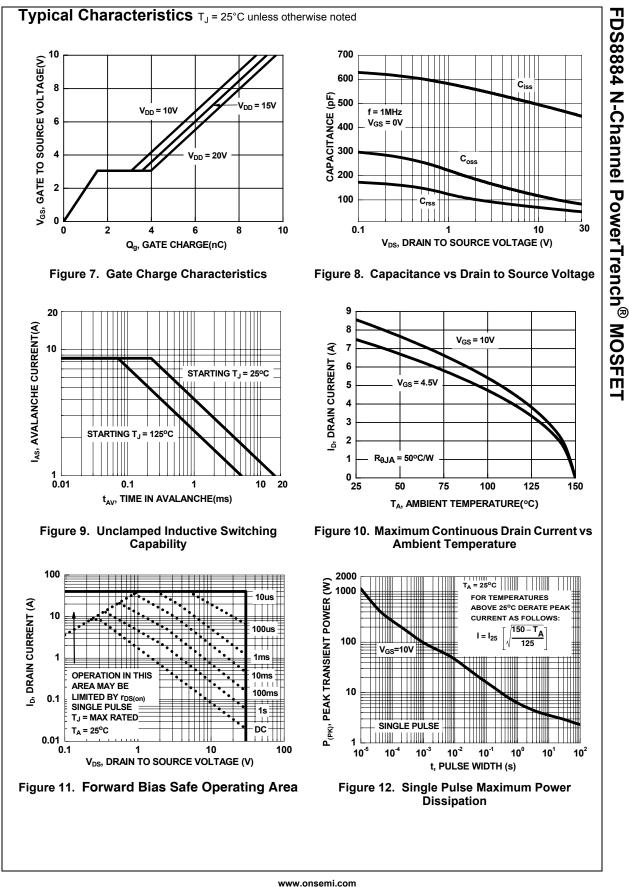

www.onsemi.com 4

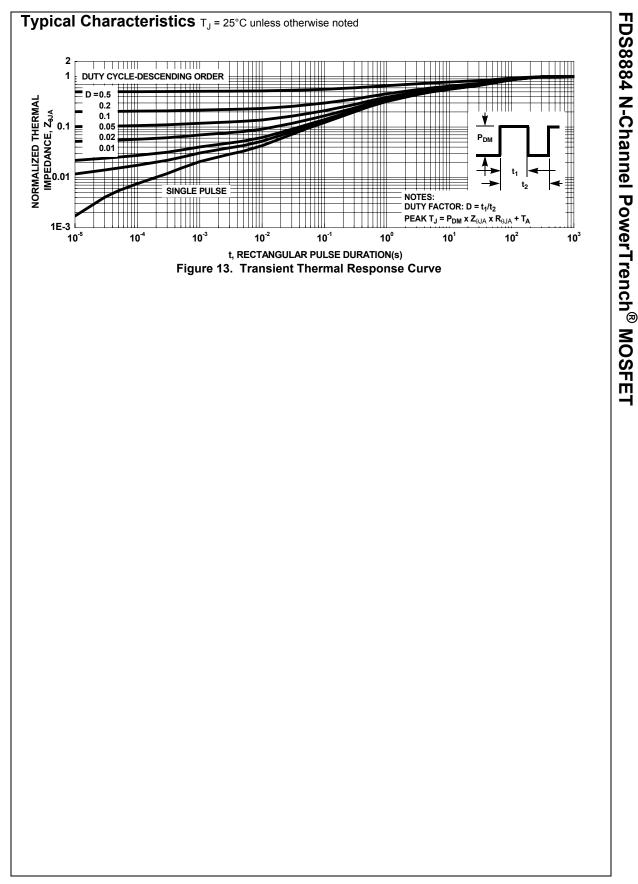

ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <u>www.onsemi.com/site/pdf/Patent-Marking.pdf</u>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor haves, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such uninten

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800–282–9855 Toll Free USA/Canada Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910

Japan Customer Focus Center Phone: 81–3–5817–1050 ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for MOSFET category:

Click to view products by ON Semiconductor manufacturer:

Other Similar products are found below :

614233C 648584F IRFD120 JANTX2N5237 FCA20N60_F109 FDZ595PZ 2SK2545(Q,T) 405094E 423220D TPCC8103,L1Q(CM MIC4420CM-TR VN1206L SBVS138LT1G 614234A 715780A NTNS3166NZT5G SSM6J414TU,LF(T 751625C BUK954R8-60E NTE6400 SQJ402EP-T1-GE3 2SK2614(TE16L1,Q) 2N7002KW-FAI DMN1017UCP3-7 EFC2J004NUZTDG ECH8691-TL-W FCAB21350L1 P85W28HP2F-7071 DMN1053UCP4-7 NTE221 NTE222 NTE2384 NTE2903 NTE2941 NTE2945 NTE2946 NTE2960 NTE2967 NTE2969 NTE2976 NTE455 NTE6400A NTE2910 NTE2916 NTE2956 NTE2911 DMN2080UCB4-7 TK10A80W,S4X(S SSM6P69NU,LF DMP22D4UF0-7B