


AC / DC Converter




Features

- More miniature, light and high efficiency without transformer than that of with transformer by means of switching mode AC/DC.
- With over current protector.


Recommended Applications

- Power supply for the microcomputer, fan motor, LED, buzzer and sensor circuit of the house-hold electric equipment

Block Diagram

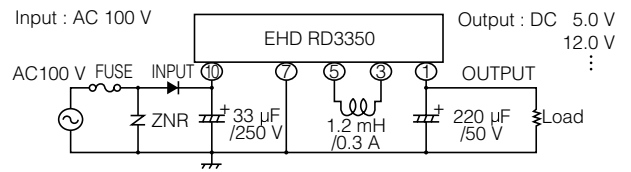

Dimensions in mm (not to scale)

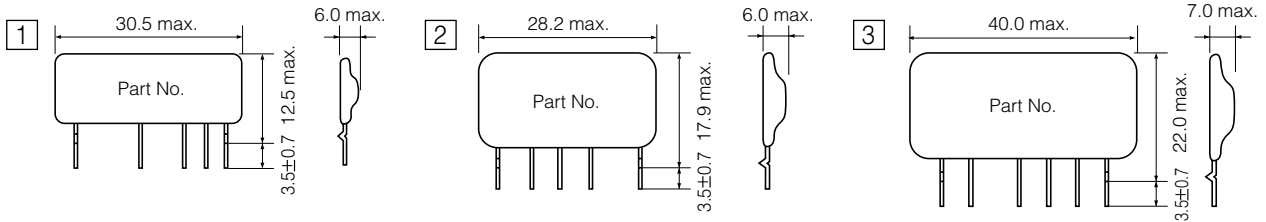

Typical Characteristics

	Performance			Part No.	Construction	Note
	Input Voltage	Output Voltage	Output Current			
Positive Power Supply	DC 113 V to 170 V	5 V	100 mA	EHDRD3303	1	
			100 mA		Built in Inductance	Sample Possible
			300 mA		3	Sample Available
		12 V	100 mA		2	Sample Available
			100 mA	EHDRD3323	Built in Inductance	
			200 mA	EHDRD3324	2	Sample Available
		15 V	100 mA	EHDRD3331	2	
			100 mA		Built in Inductance	Sample Available
			200 mA	EHDRD3334	2	Sample Available
		18 V	200 mA	EHDRD3332	3	
			100 mA	EHDRD3340	2	
		20 V	100 mA		2	Sample Available
			100 mA	EHDRD3353	Built in Inductance	
		22 V	150 mA	EHDRD3350	2	
			180 mA	EHDRD3352	3	
		24 V	100 mA		Built in Inductance	Sample Available
180 mA	EHDRD3362		2			
300 mA			3	Sample Available		
DC 225 V to 391 V	5 V	200 mA		3	Sample Available	
	12 V	200 mA	EHDRD3327	3	Sample Available	
	15 V	100 mA	EHDRD3333	3		
	24 V	100 mA	EHDRD3360	3		
Negative Power Supply	DC -113 V to -170 V	-5 V	-100 mA		2	Sample Available
			-100 mA		Built in Inductance	Sample Available
			-200 mA	EHDRD3304	2	
		-12 V	-300 mA	EHDRD3301	3	
			-100 mA	EHDRD3322	2	
			-200 mA	EHDRD3320	2	
		-15 V	-300 mA	EHDRD3321	3	
			-100 mA		2	Sample Available
		-24 V	-100 mA	EHDRD3361	2	
			-100 mA		Built in Inductance	Sample Available
DC -225 V to -391 V	-12 V	-180 mA	EHDRD3363	2		
		-200 mA		3	Sample Available	

*Please contact us. We will consult with your detailed specifications. We have series of AC/DC's of various Vout, and Iout.

Design, Specifications are subject to change without notice. Ask factory for technical specifications before purchase and/or use. Whenever a doubt about safety arises from this product, please inform us immediately for technical consultation without fail.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Isolated DC/DC Converters](#) category:

Click to view products by [Panasonic](#) manufacturer:

Other Similar products are found below :

[ESM6D044440C05AAQ](#) [FMD15.24G](#) [PSL486-7LR](#) [PSR152.5-7IR](#) [Q48T30020-NBB0](#) [AVO240-48S12B-6L](#) [AVO250-48S28B-6L](#) [NAN-0505](#) [HW-L16D](#) [JAHW100Y1](#) [217-1617-001](#) [22827](#) [SPB05C-12](#) [SQ24S15033-PS0S](#) [18952](#) [19-130041](#) [CE-1003](#) [CE-1004](#) [GQ2541-7R](#) [PSE1000DCDC-12V](#) [RDS180245](#) [MAU228](#) [419-2065-201](#) [449-2075-101](#) [J80-0041NL](#) [V300C24C150BG](#) [419-2062-200](#) [419-2063-401](#) [419-2067-101](#) [419-2067-501](#) [419-2068-001](#) [DCG40-5G](#) [DFC15U48D15](#) [449-2067-000](#) [XGS-0512](#) [XGS-1205](#) [XGS-1212](#) [XGS-2412](#) [XGS-2415](#) [XKS-1215](#) [033456](#) [NCT1000N040R050B](#) [SPB05B-15](#) [SPB05C-15](#) [SSQE48T25025-NAA0G](#) [L-DA20](#) [HP3040-9RG](#) [HP1001-9RTG](#) [XKS-2415](#) [XKS-2412](#)