




LM321

Low Power Single Operational Amplifier

Description

LM321 is a low power, wide power range performance operational amplifier; The static current is only 430 μ A per amplifier (5V) with high unit gain frequency and A voltage swing rate of 0.4V/ μ s. Input common mode circuit includes ground, so the device can operate in single - and dual-power applications. It can also comfortably drive large capacity loads.

SOT-23-5

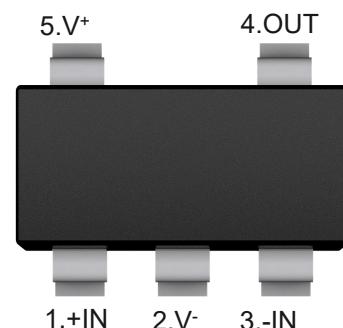


Features

- Low quiescent current
- Low input bias current
- Wide range of supply voltage
- High capacity load stability

Application

- Communication infrastructure
- Battery charger
- Power supply

Pin arrangement diagram

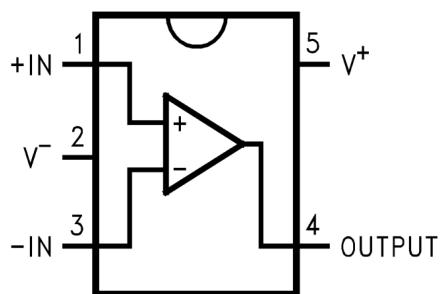



LM321

Low Power Single Operational Amplifier

Absolute Maximum Ratings ($T_A=25^\circ\text{C}$)

Parameter	Symbol	Value	Units
Supply Voltage	V_{CC}	24 or ± 12	V
Differential Input Voltage	V_{ID}	24	V
Input Voltage	V_{IN}	-0.3~VCC	V
Power Dissipation	P_D	530	mW
Output Short Circuit to GND $V \leq 15\text{V}, T_a = 25^\circ\text{C}$	I_o	Continuous	
Input Current $V_{IN} < -0.3\text{V}$	I_{IN}	50	mA
Junction Temperature	T_J	150	$^\circ\text{C}$
Operating Temperature Range	T_{OPR}	0 to 70	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-65 to 150	$^\circ\text{C}$

Electrical Characteristics


At $V_{CC}=5\text{V}$, unless otherwise noted.

Parameter	Symbol	Conditions		Min.	Typ.	Max.	Units
Input Offset Voltage	V_{OS}	$T_a=25^\circ\text{C}$		--	± 2	± 5	mV
Input offset current	I_{OS}	$T_a=25^\circ\text{C}, I_{IN(+)} - I_{IN(-)}, V_{CM}=0\text{V}$		--	± 3	± 50	nA
Input bias current	I_B	$T_a=25^\circ\text{C}, I_{IN(+)} \text{ or } I_{IN(-)}, V_{CM}=0\text{V}$		--	± 45	± 250	nA
Common-mode input voltage range	V_{CM}	$T_a=25^\circ\text{C}, V^+=24\text{V}$		0	--	$V_{CC}-1.5$	V
Supply current	I_S	$V_{CC}=24\text{V}, R_L=\infty$		--	0.7	2	mA
		$V_{CC}=5\text{V}, R_L=\infty$		--	0.5	1.2	
Common Mode Rejection	$CMRR$	$V_{CM} = 0\text{~}VCC-1.5\text{V}, T_a=25^\circ\text{C}, DC$		65	90	--	dB
Power Supply Rejection	$PSRR$	$V_{CC} = 5\text{V}\text{~}24\text{V}, T_a=25^\circ\text{C}, DC$		65	100	--	dB
Large signal voltage gain	A_V	$V_{CC} = 15\text{V}, T_a=25^\circ\text{C}, R_L \geq 2\text{k}\Omega \text{ (for } V_o=1\text{~}11\text{V)}$		25	100	--	V/mV
Output voltage swing	V_O	V_{OH}	$V_{CC} = 24\text{V}, R_L = 2\text{k}\Omega$	22	--	--	V
			$V_{CC} = 24\text{V}, R_L = 10\text{k}\Omega$	22	--	--	V
		V_{OL}	$V_{CC} = 5\text{V}, R_L = 10\text{k}\Omega$	--	5	20	mV
Output Current Sourcing	I_{SOURCE}	$V_{IN(+)}=1\text{V}, V_{IN(-)}=0\text{V}, V_{CC}=15\text{V}, V_o=2\text{V}, T_a=25^\circ\text{C}$		20	40	--	mA
Output Current Sinking	I_{SINK}	$V_{IN(+)}=0\text{V}, V_{IN(-)}=1\text{V}, V_{CC}=15\text{V}, V_o=2\text{V}, T_a=25^\circ\text{C}$		10	15	--	mA
		$V_{IN(+)}=0\text{V}, V_{IN(-)}=1\text{V}, V_{CC}=15\text{V}, V_o=200\text{mV}, T_a=25^\circ\text{C}$		12	50	--	μA
Output Short Circuit to Ground	I_o	$V_{CC}=15\text{V}, T_a=25^\circ\text{C}$		--	40	60	mA




LM321 Low Power Single Operational Amplifier

Typical Applications

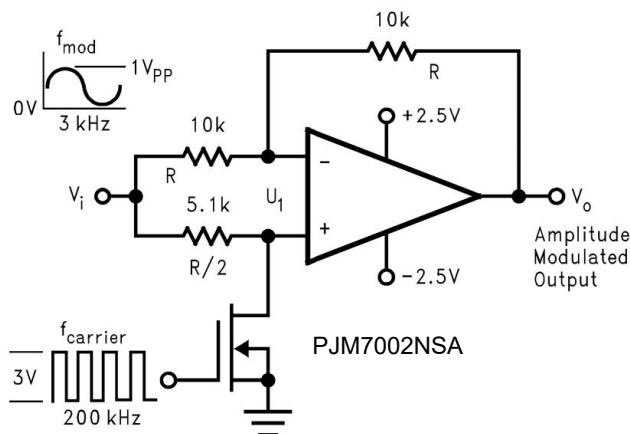


Amplitude modulator circuit

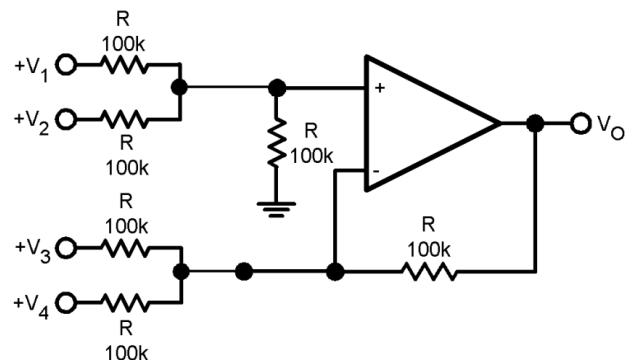

Note: $V_o = V_1 + V_2 - V_3 - V_4, (V_1 + V_2) \geq (V_3 + V_4)$ for $V_o \geq 0V_{DC}$


DC adder amplifier

$(V_{IN} \geq 0V_{DC}, V_o \geq V_{DC})$

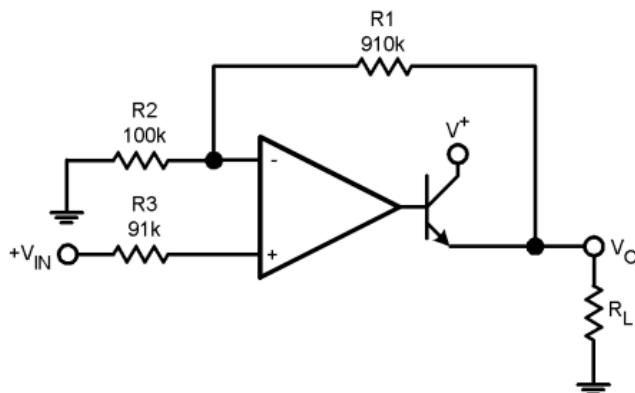


$V_o = 0V_{DC}$ for $V_{IN} = 0V_{DC}$, $A_v = 10$


Power Amplifier

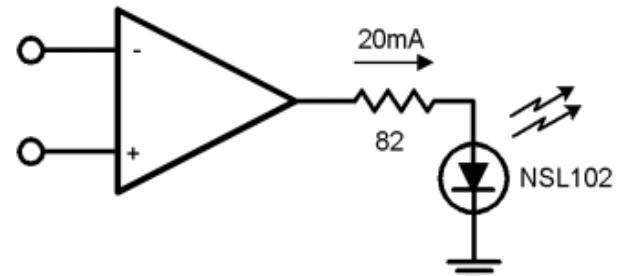

LED Driver

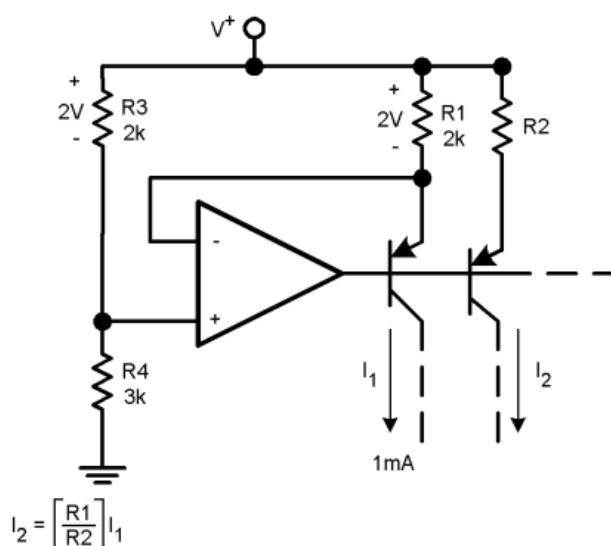

Fixed current source

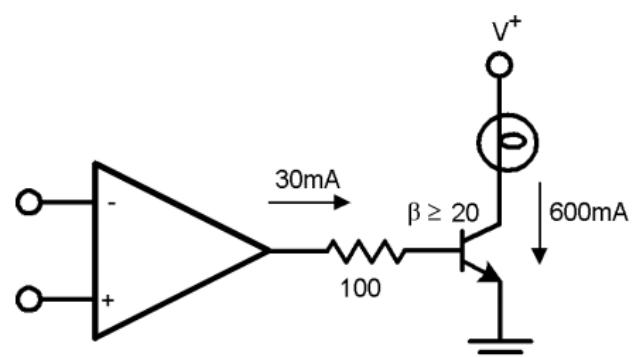


Lamp Driver




LM321

Low Power Single Operational Amplifier


Typical characteristic curve

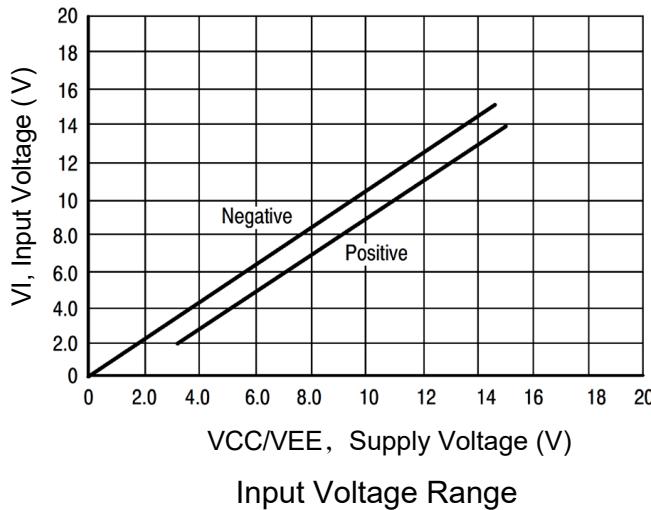


Input Voltage Range

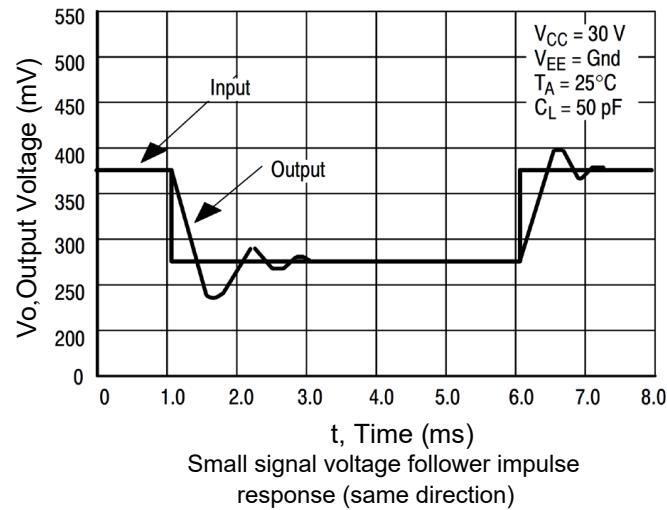

Small signal voltage follower impulse response (same direction)

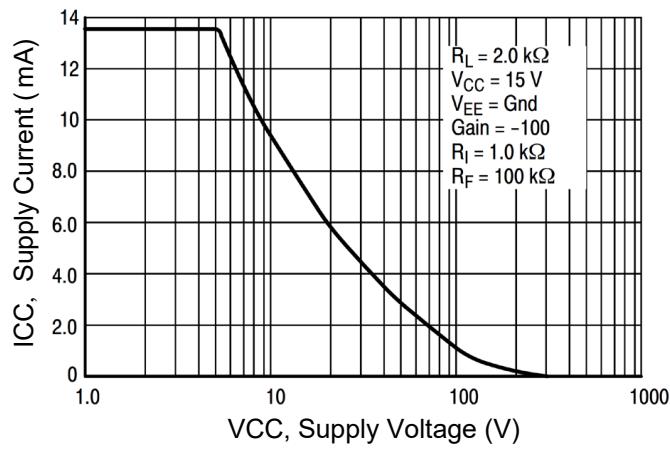

Supply current (static power consumption)

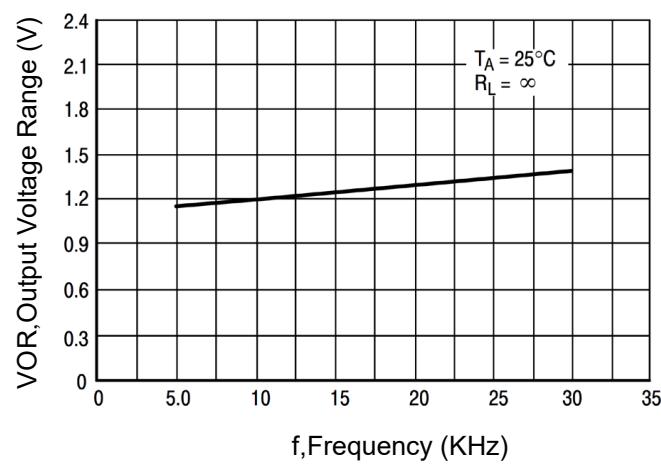

Large signal frequency response




LM321

Low Power Single Operational Amplifier

Package Outline

SOT-23-5

Dimensions in mm

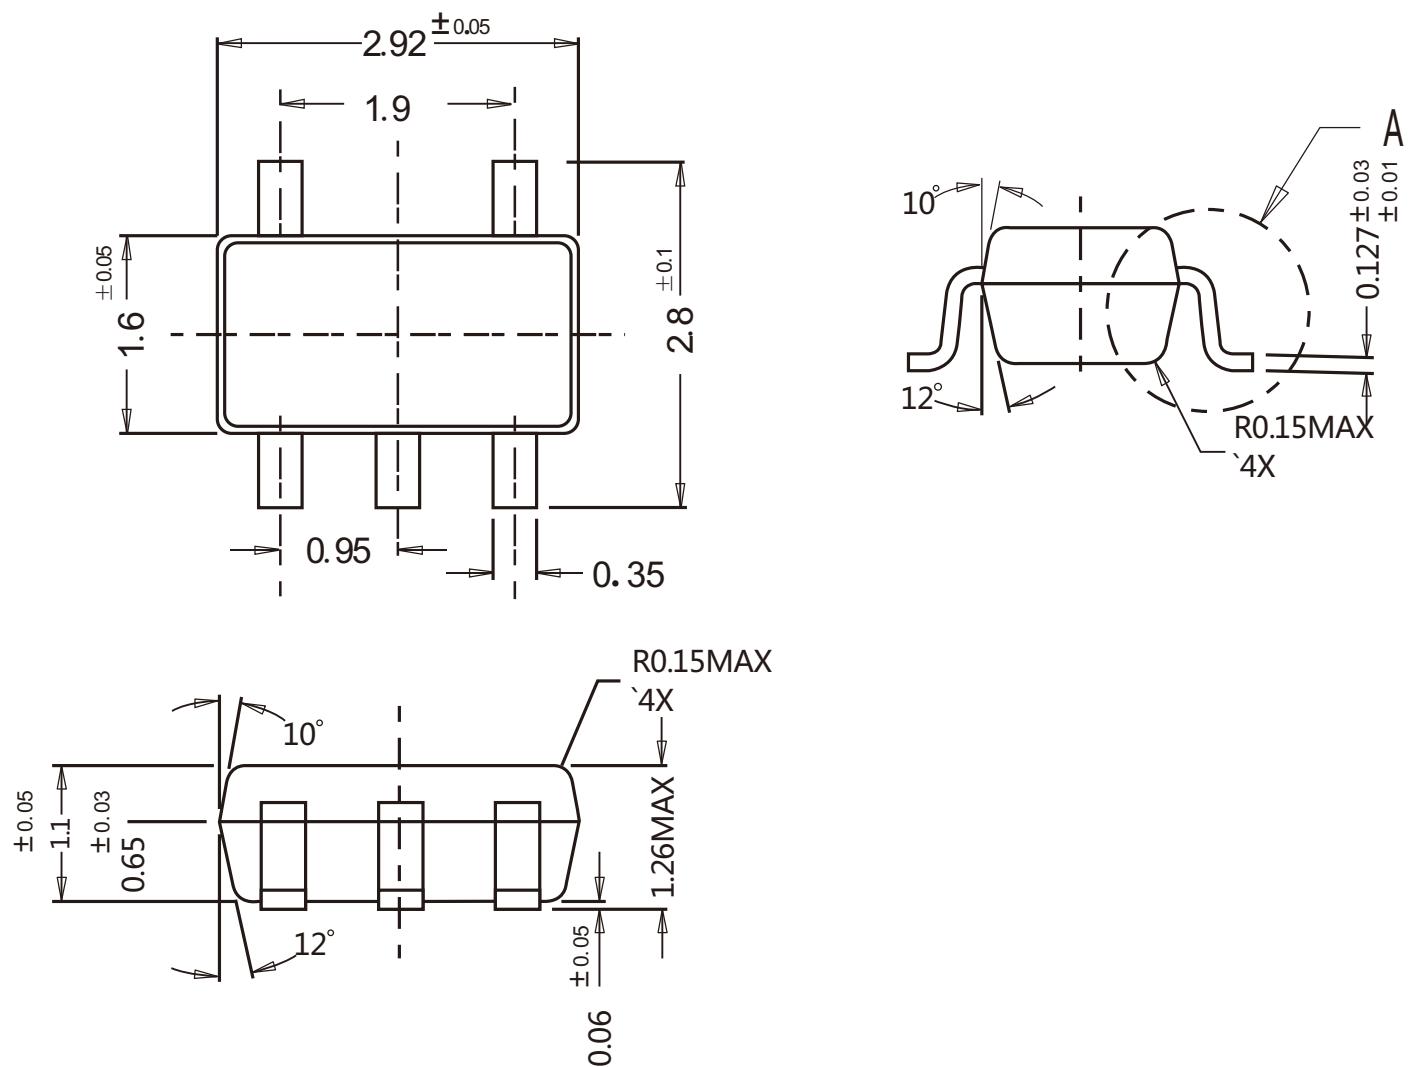

Ordering Information

Device	Package	Shipping
LM321	SOT-23-5	3,000/ Tape & Reel (7 inches)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Operational Amplifiers - Op Amps category:

Click to view products by Pingjingsemi manufacturer:

Other Similar products are found below :

[OPA2991IDSGR](#) [OPA607IDCKT](#) [007614D](#) [633773R](#) [635798C](#) [635801A](#) [702115D](#) [709228FB](#) [741528D](#) [NCV33072ADR2G](#)
[SC2902DTBR2G](#) [SC2903DR2G](#) [SC2903VDR2G](#) [LM258AYDT](#) [LM358SNG](#) [430227FB](#) [430228DB](#) [460932C](#) [AZV831KTR-G1](#) [409256CB](#)
[430232AB](#) [LM2904DR2GH](#) [LM358YDT](#) [LT1678IS8](#) [042225DB](#) [058184EB](#) [070530X](#) [SC224DR2G](#) [SC239DR2G](#) [SC2902DG](#)
[SCYA5230DR2G](#) [714228XB](#) [714846BB](#) [873836HB](#) [MIC918YC5-TR](#) [TS912BIYDT](#) [NCS2004MUTAG](#) [NCV33202DMR2G](#)
[M38510/13101BPA](#) [NTE925](#) [SC2904DR2G](#) [SC358DR2G](#) [LM358EDR2G](#) [AZV358MTR-G1](#) [AP4310AUMTR-AG1](#) [HA1630D02MMEL-E](#)
[NJM358CG-TE2](#) [HA1630S01LPEL-E](#) [LM324AWPT](#) [HA1630Q06TELL-E](#)