600V N-Channel MOSFET

Lead Free Package and Finish

BV_{DSS}	$R_{DS(ON),typ.}$	I_D
600V	250mΩ	26A

General Features

- Advanced Planar Process
- $R_{DS(ON),typ.}$=250 mΩ@V_{GS}=10V
- Low Gate Charge Minimize Switching Loss
- Rugged Poly silicon Gate Structure

Applications

- BLDC Motor Driver
- Electric Welder
- High Efficiency SMPS





TO-220F Package

Ordering Information

Part Number	Package	Brand
PTA26N60	TO-220F	

Absolute Maximum Ratings

T_C=25℃ unless otherwise specified

Symbol	Parameter	PTA26N60	Unit
V_{DSS}	Drain-to-Source Voltage	600	V
V_{GSS}	Gate-to-Source Voltage	±30	
I_D	Continuous Drain Current	26	A
	Continuous Drain Current @ Tc=100℃	17	
I_{DM}	Pulsed Drain Current at V_{GS}=10V[2,4]	104	
E_{AS}	Single Pulse Avalanche Energy	1500	mJ
dv/dt	Peak Diode Recovery dv/dt[3]	5.0	V/ns
P_D	Power Dissipation	88	W
	Derating Factor above 25℃	0.70	W/℃
T_L T_{PAK}	Maximum Temperature for Soldering Leads at 0.063in (1.6mm) from Case for 10 seconds, Package Body for 10 seconds	300 260	℃
T_J& T_{STG}	Operating and Storage Temperature Range	-55 to 150	

Caution: Stresses greater than those listed in the "Absolute Maximum Ratings" may cause permanent damage to the device.

Thermal Characteristics

Symbol	Parameter	PTA26N60	Unit
$R_{\theta JC}$	Thermal Resistance, Junction-to-Case	1.42	℃/W
$R_{\theta JA}$	Thermal Resistance, Junction-to-Ambient	100	

©2019 Perfect Intelligent Power Semiconductor Co., Ltd. All rights reserved. Information and data in this document are owned by PIP Semiconductors and may not be edited, reproduced, or redistributed in any way without written consent from PIP.

Electrical Characteristics

OFF Characteristics

T_J =25℃ unless otherwise specified

Symbol	Parameter	Min.	Typ.	Max.	Unit	Test Conditions
BV_{DSS}	Drain-to-Source Breakdown Voltage	600	--	--	V	V_{GS}=0V, I_D=250uA
I_{DSS}	Drain-to-Source Leakage Current	--	--	1	uA	V_{DS}=600V, V_{GS}=0V
		--	--	125		V_{DS}=480V, V_{GS}=0V, T_J =125℃
I_{GSS}	Gate-to-Source Leakage Current	--	--	+100	nA	V_{GS}=+30V, V_{DS}=0V
		--	--	-100		V_{GS}=-30V, V_{DS}=0V

ON Characteristics

T_J =25℃ unless otherwise specified

Symbol	Parameter	Min.	Typ.	Max.	Unit	Test Conditions
$R_{DS(ON)}$	Static Drain-to-Source On-Resistance	--	250	350	mΩ	V_{GS}=10V, I_D=13A
$V_{GS(TH)}$	Gate Threshold Voltage	2.0	--	4.0	V	V_{DS}=V_{GS}, I_D=250uA
g_{FS}	Forward Transconductance	--	32	--	S	V_{DS} =25V, I_D=13A

Dynamic Characteristics

Essentially independent of operating temperature

Symbol	Parameter	Min.	Typ.	Max.	Unit	Test Conditions
C_{iss}	Input Capacitance	--	4.28	--	nF	V_{GS}=0V, V_{DS}=25V, f=1.0MHz
C_{rss}	Reverse Transfer Capacitance	--	0.19	--		
C_{oss}	Output Capacitance	--	1.41	--		
Q_g	Total Gate Charge	--	78	--	nC	V_{DD}=300V, I_D=26A, V_{GS}=0 to 10V
Q_{gs}	Gate-to-Source Charge	--	21	--		
Q_{gd}	Gate-to-Drain (Miller) Charge	--	20	--		

Resistive Switching Characteristics

Essentially independent of operating temperature

Symbol	Parameter	Min.	Typ.	Max.	Unit	Test Conditions
$t_{d(ON)}$	Turn-on Delay Time	--	25	--	nS	V_{DD}=300V, I_D=13A, V_{GS}= 10V R_G=10Ω
t_{rise}	Rise Time	--	39	--		
$t_{d(OFF)}$	Turn-Off Delay Time	--	100	--		
t_{fall}	Fall Time	--	36	--		

©2019 Perfect Intelligent Power Semiconductor Co., Ltd. All rights reserved. Information and data in this document are owned by PIP Semiconductors and may not be edited, reproduced, or redistributed in any way without written consent from PIP.

Source-Drain Body Diode Characteristics

T_J=25℃ unless otherwise specified

Symbol	Parameter	Min	Typ.	Max.	Unit	Test Conditions
I_{SD}	Continuous Source Current[2]	--	--	26	A	Integral PN-diode in MOSFET
I_{SM}	Pulsed Source Current[2]	--	--	104		
V_{SD}	Diode Forward Voltage	--	--	1.5	V	I_S=28A, V_{GS}=0V
trr	Reverse recovery time	--	535	--	ns	V_{GS}=0V ,I_F=28A, di_F/dt=100A/μs
Qrr	Reverse recovery charge	--	4.6	--	uC	

Note:

[1] T_J=+25℃ to +150℃ .
[2] Silicon limited current only.
[3] Package limited current.
[4] Repetitive rating; pulse width limited by maximum junction temperature.
[5] Pulse width≤380μs; duty cycle≤2%.

©2019 Perfect Intelligent Power Semiconductor Co., Ltd. All rights reserved. Information and data in this document are owned by PIP Semiconductors and may not be edited, reproduced, or redistributed in any way without written consent from PIP.

Typical Characteristics

Figure 1. Maximum Transient Thermal Impedance

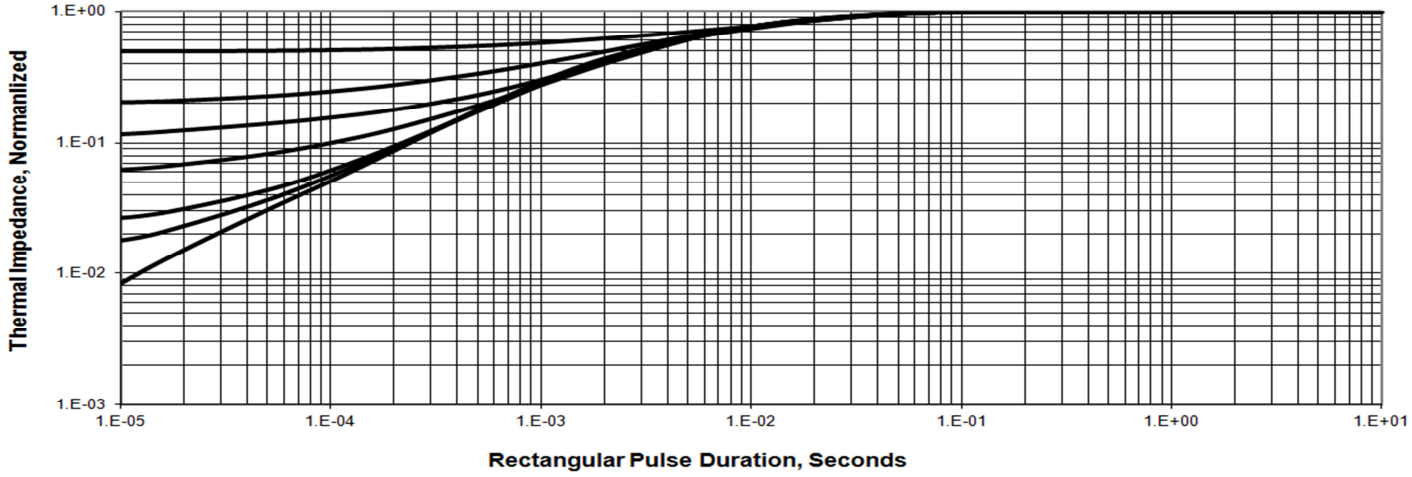

Figure 2 . Max. Power Dissipation vs Case Temperature

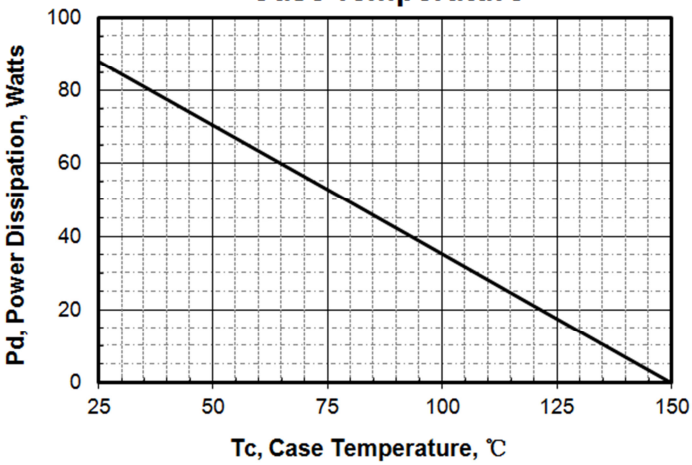

Figure 3 .Maximum Continuous Drain Current vs Tc

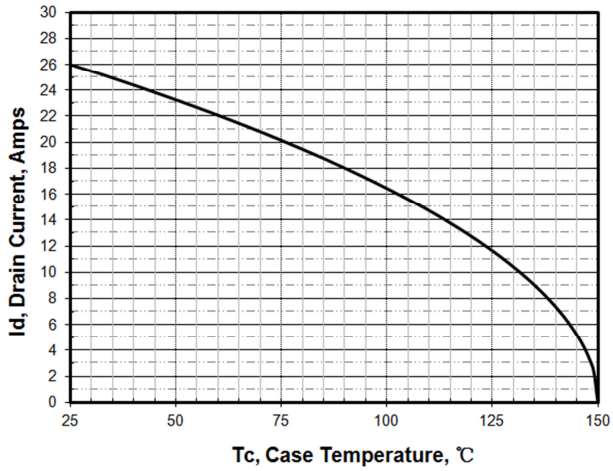

Figure 4. Output Characteristics

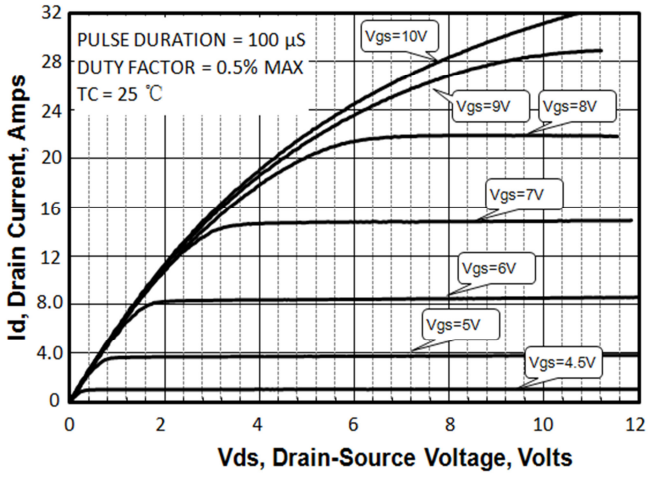

Figure 5. Rdson vs Gate Voltage

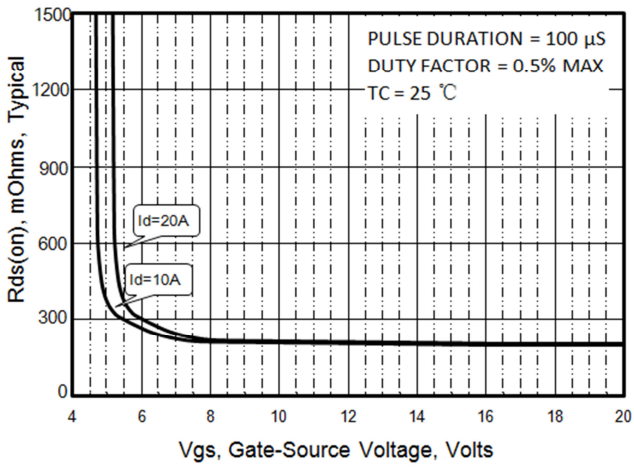

©2019 Perfect Intelligent Power Semiconductor Co., Ltd. All rights reserved. Information and data in this document are owned by PIP Semiconductors and may not be edited, reproduced, or redistributed in any way without written consent from PIP.

Typical Characteristics(Cont.)

Figure 6. Peak Current Capability

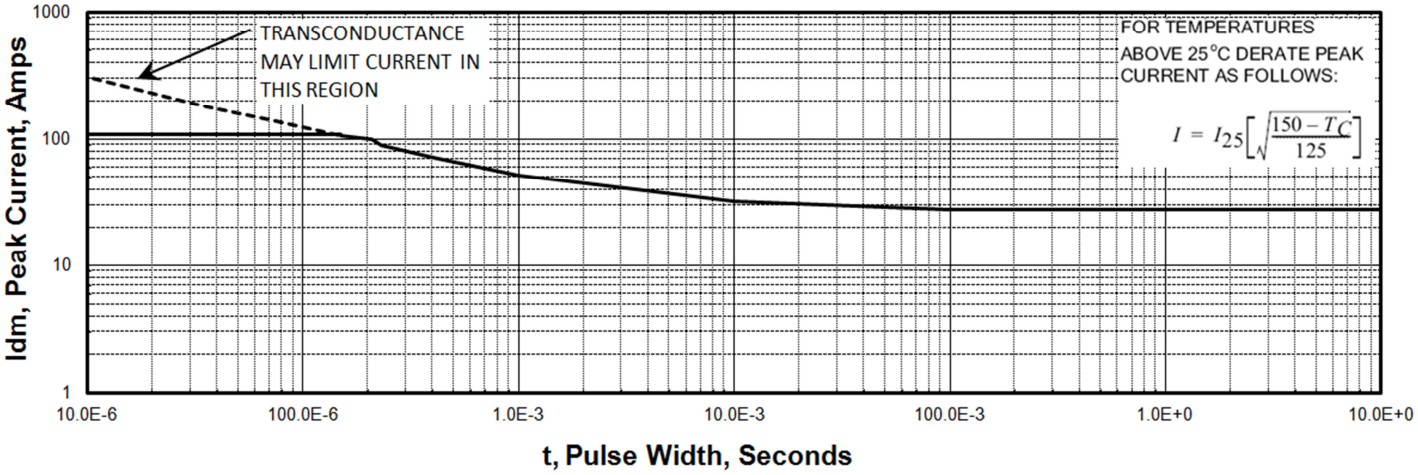

Figure 7. Transfer Characteristics

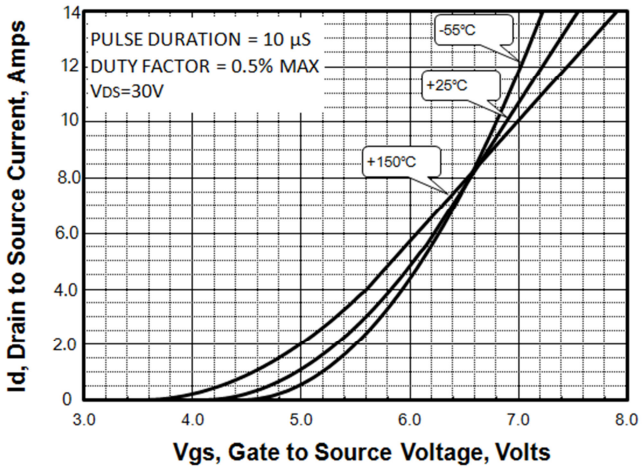

Figure 8. Unclamped Inductive Switching Capability

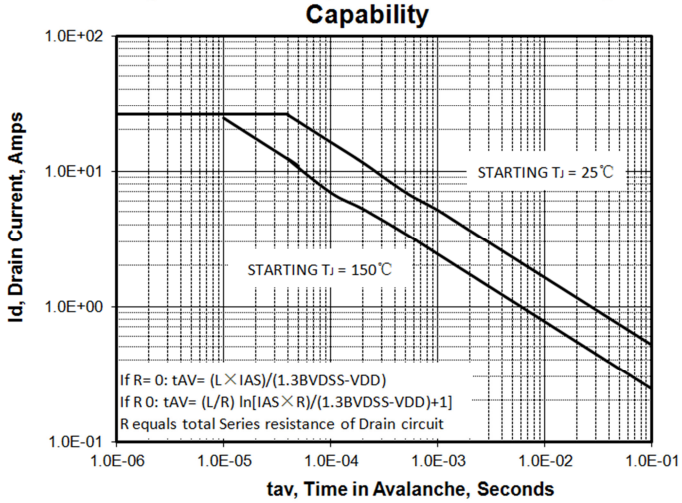

Figure 9. Drain to Source ON Resistance vs Drain Current

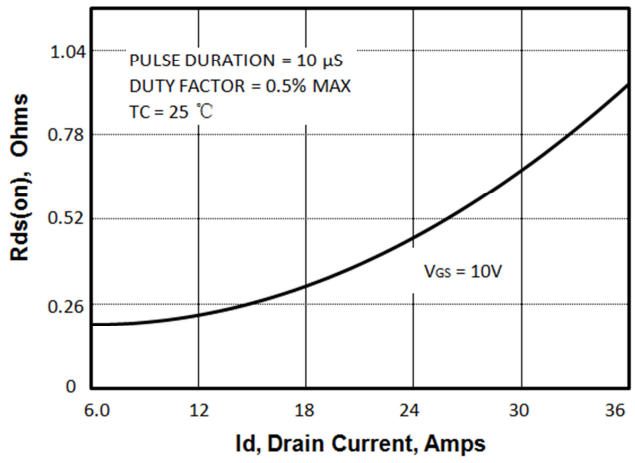

Figure 10. Rdson vs Junction Temperature

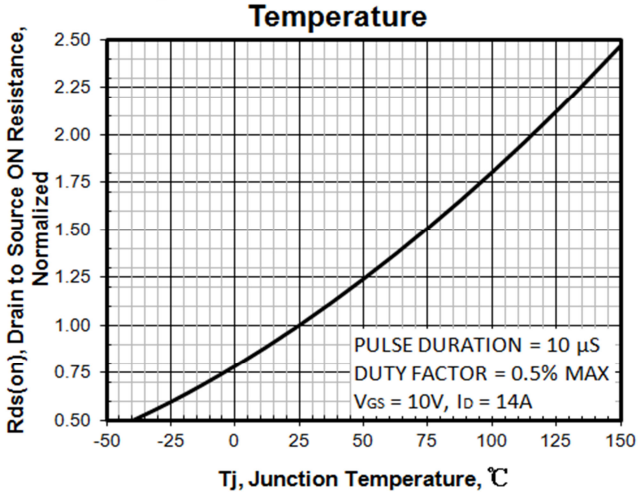

©2019 Perfect Intelligent Power Semiconductor Co., Ltd. All rights reserved. Information and data in this document are owned by PIP Semiconductors and may not be edited, reproduced, or redistributed in any way without written consent from PIP.

Typical Characteristics(Cont.)

Figure 11.Breakdown Voltage vs Temperature

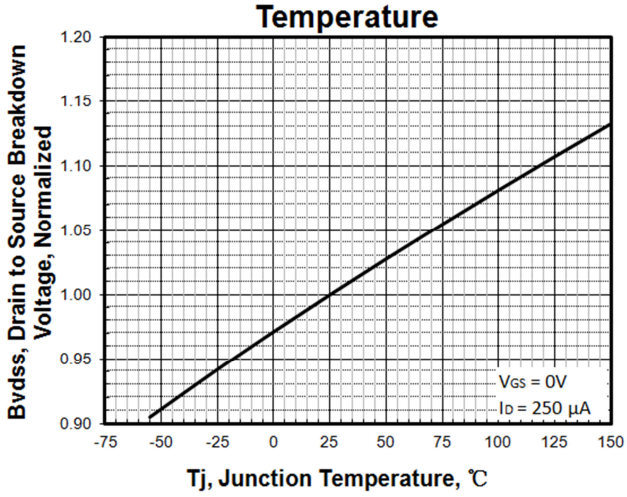

Figure 12.Threshold Voltage vs Temperature

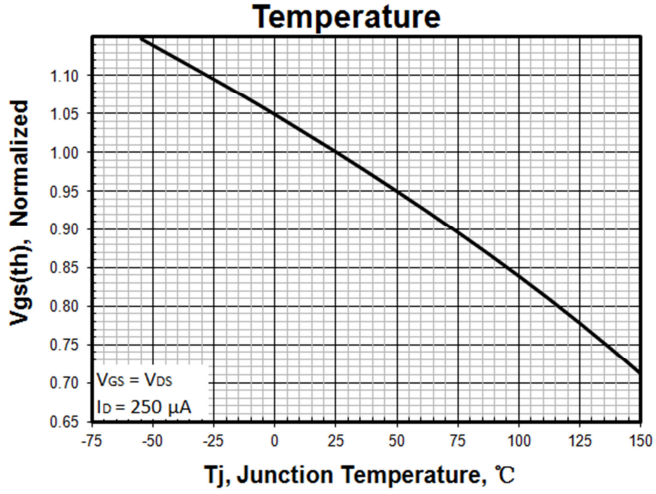

Figure 13 . Maximum Safe Operating Area

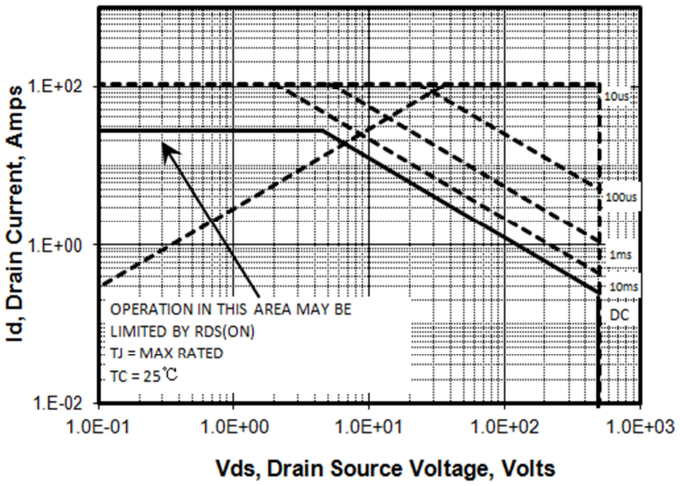

Figure 14. Capacitance vs Vds

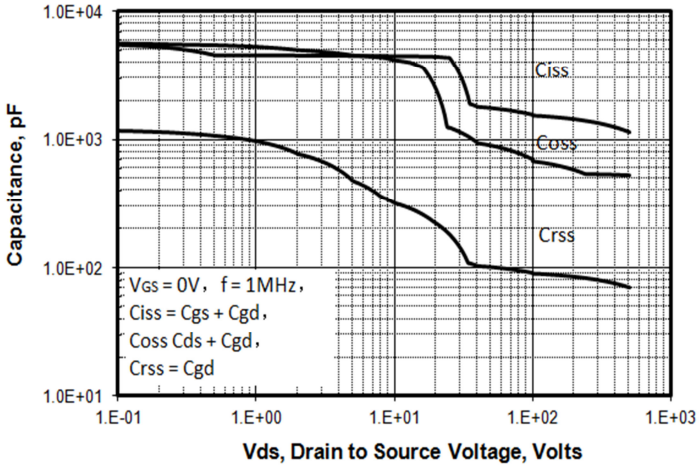

Figure 15 .Typical Gate Charge

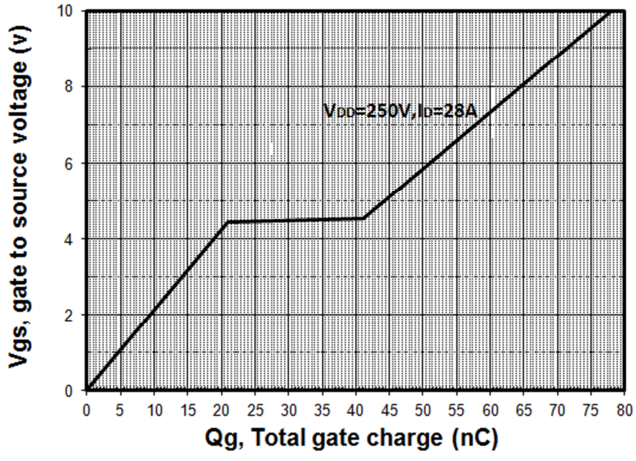

Figure 16.Body Diode Transfer Characteristics

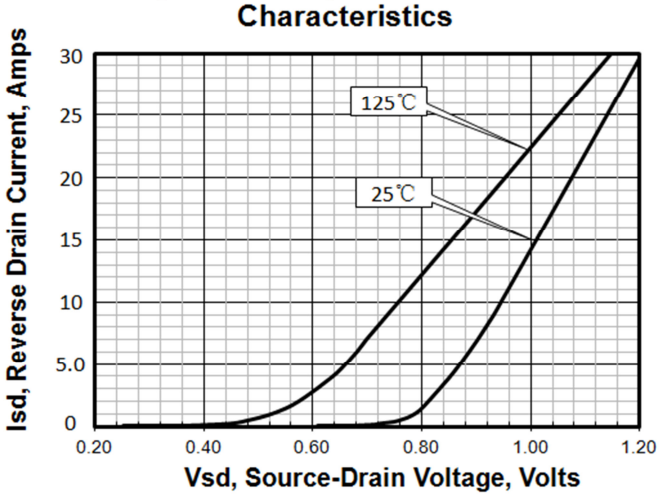

©2019 Perfect Intelligent Power Semiconductor Co., Ltd. All rights reserved. Information and data in this document are owned by PIP Semiconductors and may not be edited, reproduced, or redistributed in any way without written consent from PIP.

Test Circuits and Waveforms

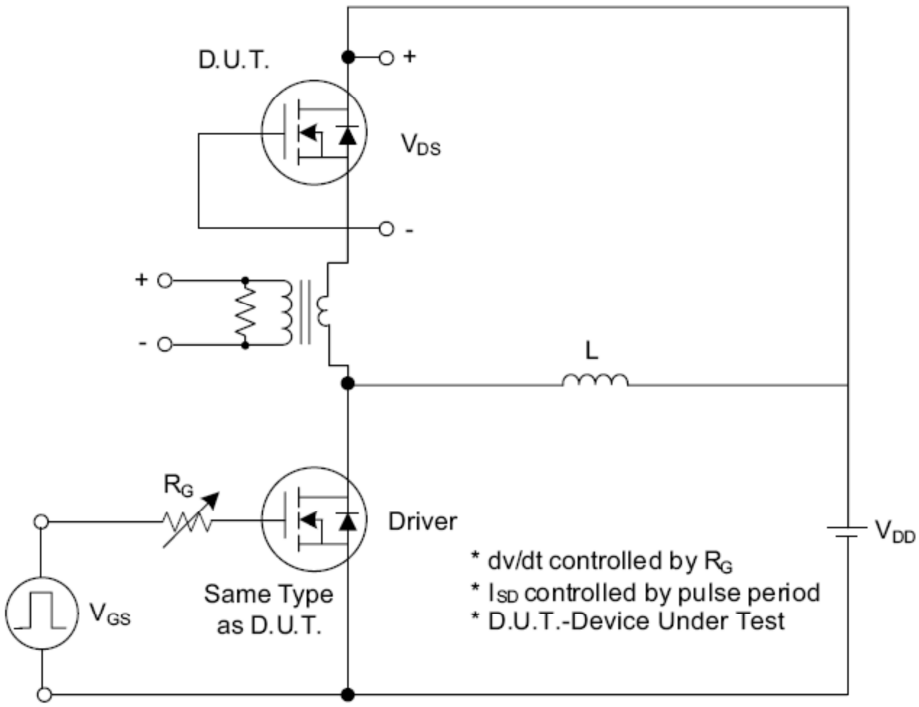

Fig. 1.1 Peak Diode Recovery dv/dt Test Circuit

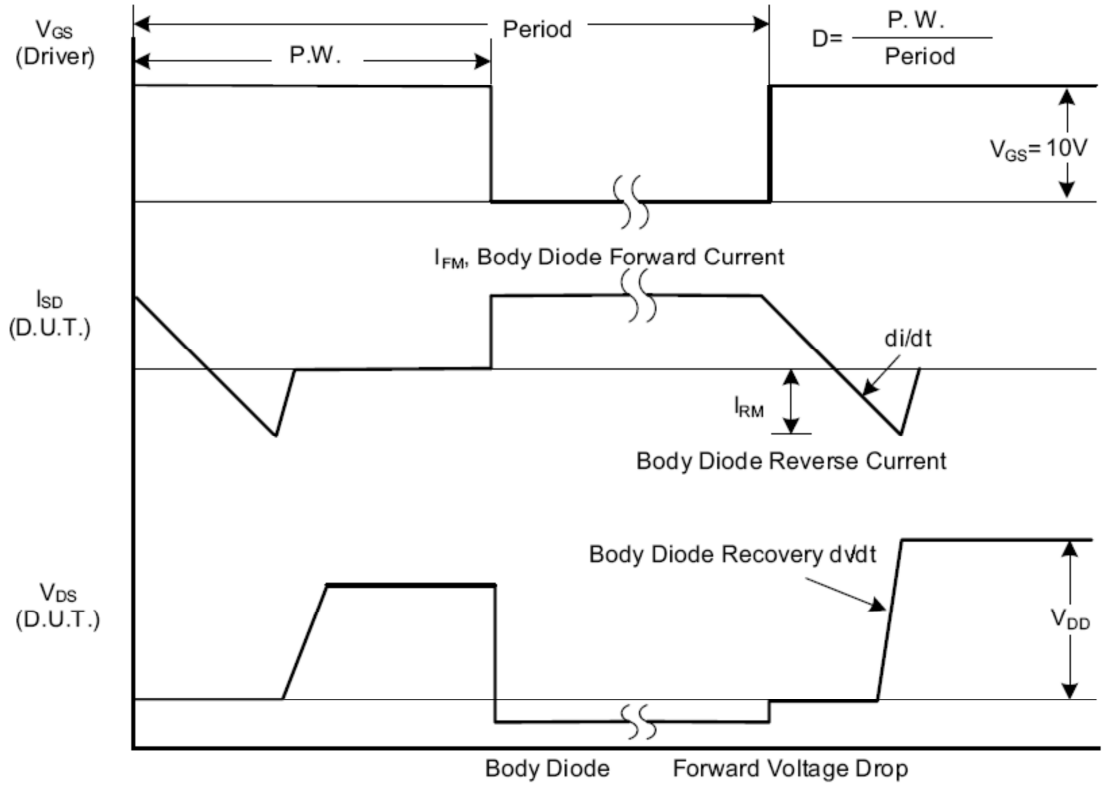

Fig. 1.2 Peak Diode Recovery dv/dt Waveforms

©2019 Perfect Intelligent Power Semiconductor Co., Ltd. All rights reserved. Information and data in this document are owned by PIP Semiconductors and may not be edited, reproduced, or redistributed in any way without written consent from PIP.

Test Circuits and Waveforms (Cont.)

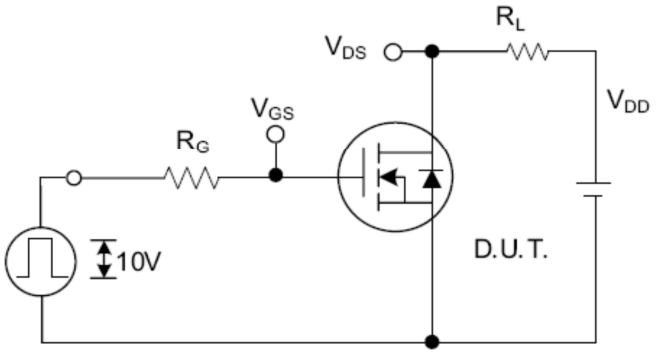

Fig. 2.1 Switching Test Circuit

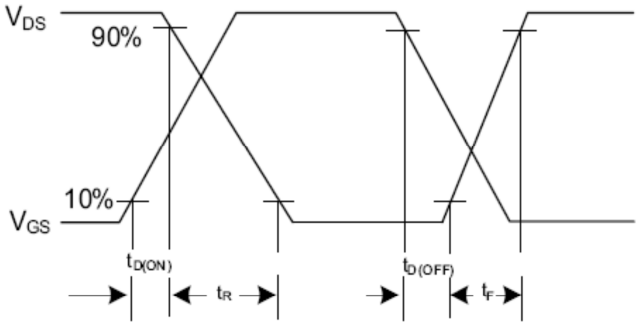

Fig. 2.2 Switching Waveforms

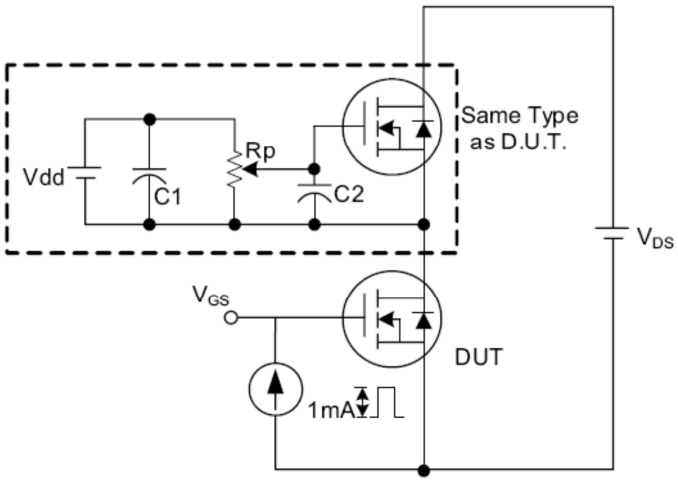

Fig. 3 . 1 Gate Charge Test Circuit

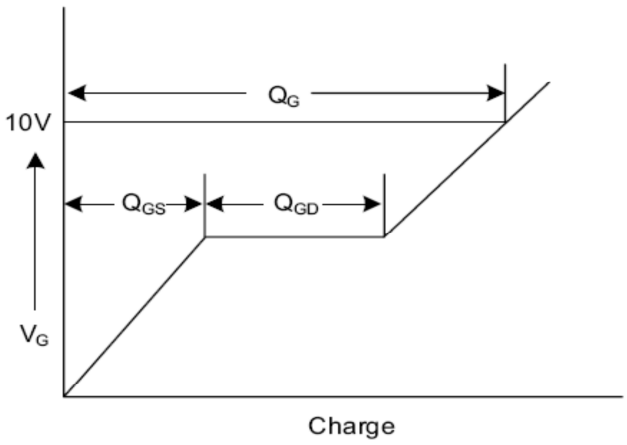

Fig. 3 . 2 Gate Charge Waveform

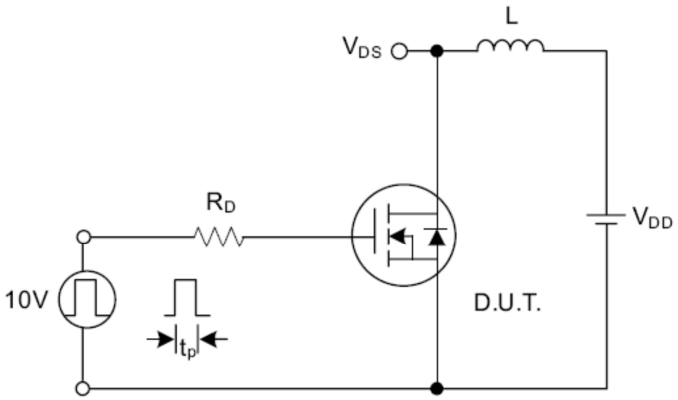

Fig. 4.1 Unclamped Inductive Switching Test Circuit

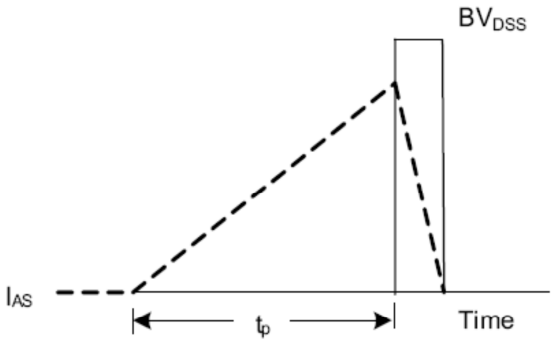

Fig. 4.2 Unclamped Inductive Switching Waveforms

©2019 Perfect Intelligent Power Semiconductor Co., Ltd. All rights reserved. Information and data in this document are owned by PIP Semiconductors and may not be edited, reproduced, or redistributed in any way without written consent from PIP.

Disclaimers:

Perfect Intelligent Power Semiconductor Co., Ltd (PIP) reserves the right to make changes without notice in order to improve reliability, function or design and to discontinue any product or service without notice. Customers should obtain the latest relevant information before orders and should verify that such information is current and complete. All products are sold subject to PIP's terms and conditions supplied at the time of order acknowledgement.

Perfect Intelligent Power Semiconductor Co., Ltd warrants performance of its hardware products to the specifications at the time of sale, Testing, reliability and quality control are used to the extent PIP deems necessary to support this warrantee. Except where agreed upon by contractual agreement, testing of all parameters of each product is not necessarily performed.

Perfect Intelligent Power Semiconductor Co., Ltd does not assume any liability arising from the use of any product or circuit designs described herein. Customers are responsible for their products and applications using PIP's components. To minimize risk, customers must provide adequate design and operating safeguards.

Perfect Intelligent Power Semiconductor Co., Ltd does not warrant or convey any license either expressed or implied under its patent rights, nor the rights of others. Reproduction of information in PIP's data sheets or data books is permissible only if reproduction is without modification or alteration. Reproduction of this information with any alteration is an unfair and deceptive business practice. Perfect Intelligent Power Semiconductor Co., Ltd is not responsible or liable for such altered documentation.

Resale of PIP's products with statements different from or beyond the parameters stated by Perfect Intelligent Power Semiconductor Co., Ltd for that product or service voids all express or implied warrantees for the associated PIP's product or service and is unfair and deceptive business practice. Perfect Intelligent Power Semiconductor Co., Ltd is not responsible or liable for any such statements.

Life Support Policy:

Perfect Intelligent Power Semiconductor Co., Ltd's products are not authorized for use as critical components in life support devices or systems without the expressed written approval of Perfect Intelligent Power Semiconductor Co., Ltd.

As used herein:

1. Life support devices or systems are devices or systems which:
   a. are intended for surgical implant into the human body,
   b. support or sustain life,
   c. whose failure to perform when properly used in accordance with instructions for used provided in the labeling, can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

©2019 Perfect Intelligent Power Semiconductor Co., Ltd. All rights reserved. Information and data in this document are owned by PIP Semiconductors and may not be edited, reproduced, or redistributed in any way without written consent from PIP.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for MOSFET ***category:***

Click to view products by PIP ***manufacturer:***

Other Similar products are found below :

614233C 648584F MCH3443-TL-E MCH6422-TL-E FDPF9N50NZ FW216A-TL-2W FW231A-TL-E APT5010JVR NTNS3A92PZT5G IRF100S201 JANTX2N5237 2SK2464-TL-E 2SK3818-DL-E FCA20N60_F109 FDZ595PZ STD6600NT4G FSS804-TL-E 2SJ277-DL-E 2SK1691-DL-E 2SK2545(Q,T) D2294UK 405094E 423220D MCH6646-TL-E TPCC8103,L1Q(CM 367-8430-0972-503 VN1206L 424134F 026935X 051075F SBVS138LT1G 614234A 715780A NTNS3166NZT5G 751625C 873612G IRF7380TRHR IPS70R2K0CEAKMA1 RJK60S3DPP-E0#T2 RJK60S5DPK-M0#T0 APT5010JVFR APT12031JFLL APT12040JVR DMN3404LQ-7 NTE6400 JANTX2N6796U JANTX2N6784U JANTXV2N5416U4 SQM110N05-06L-GE3 SIHF35N60E-GE3