



FEATURES

- COMPACT DESIGN
- HIGH ACCURACY
- EXCELLENT FOR HIGH DENSITY SURFACE MOUNTING

SPECIFICATIONS


PARAMETER	VALUE
FREQUENCY RANGE	20.00 MHz TO 80.00 MHz (FUNDAMENTAL)
FREQUENCY TOLERANCE AT 25°C	±50 PPM MAXIMUM (±10 PPM, ±20 PPM AND ±30 PPM**)
FREQUENCY STABILITY OVER TEMPERATURE	±50 PPM MAXIMUM (±10 PPM, ±20 PPM AND ±30 PPM**)
OPERATING TEMPERATURE RANGE	-10°C TO +60°C, (-40°C TO +85°C**)
STORAGE TEMPERATURE RANGE	-40°C TO +85°C
EQUIVALENT SERIES RESISTANCE	SEE TABLE 1
LOAD CAPACITANCE	8pF, 10pF, 12pF TO 22pF
SHUNT CAPACITANCE	5.0 pF MAXIMUM
DRIVE LEVEL	100 µW MAX
SHOCK RESISTANCE	±5 PPM MAXIMUM 75 cm DROP TEST IN 3 AXES ON TO A HARD SURFACE
REFLOW CONDITIONS	260°C FOR 10s MAXIMUM

** Available in some cases (FREQUENCY DEPENDENT).

TABLE 1

FREQUENCY (MHz)	MODE	MAXIMUM ESR (OHMS)
20.00 TO 39.9	FUND	180
40.00 TO 80.00	FUND	60

OUTLINE DRAWING

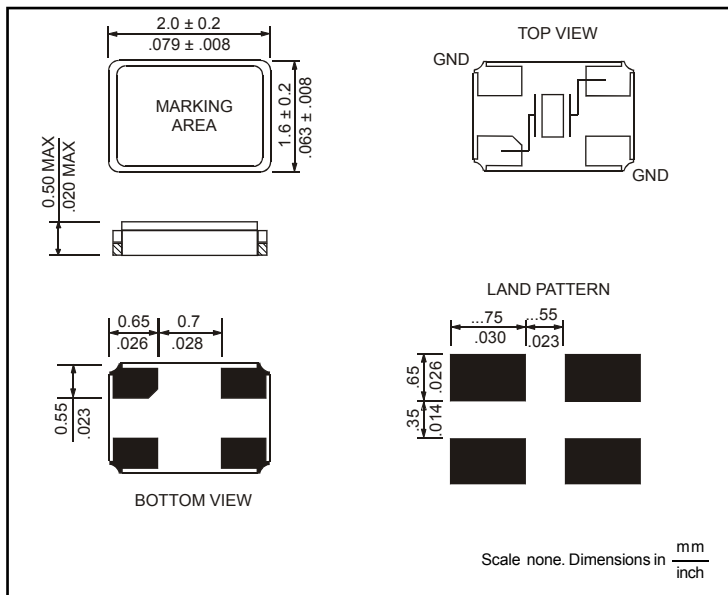

PACKAGING


178 mm REEL DIAMETER
8 mm TAPE WIDTH, 4 mm PITCH
QUANTITY: 1000 PIECES PER REEL

PART NUMBERING SYSTEM


HOLDER TYPE	FREQUENCY	LOAD CAPACITANCE	TOLERANCE / STABILITY	OPTION
R2016	IN MHz	10 TO 22 pF FOR PARALLEL	±10/±10 : 1010 ±20/±20 : 2020 ±30/±30 : 3030	TR TAPE AND REEL

PART NUMBER EXAMPLE: R2016-40.000-10-2050-TR

SOLDER REFLOW PROFILE

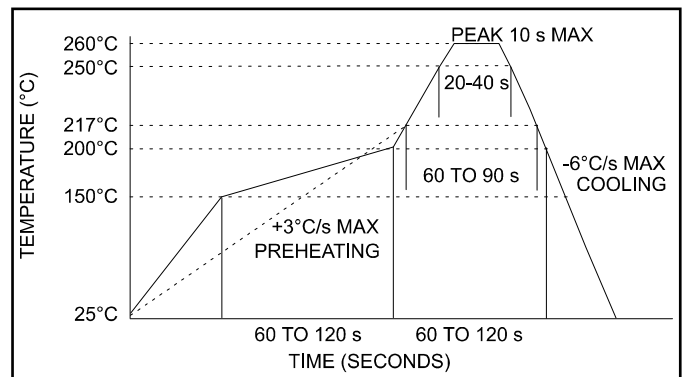

CARRIER TAPE DIMENSIONS

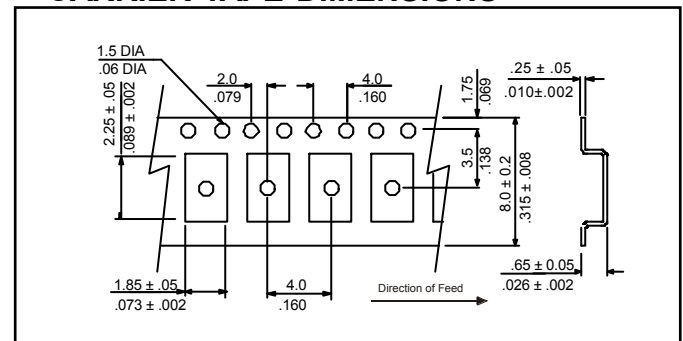

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [raltron](#) manufacturer:

Other Similar products are found below :

[AS-24.576-18](#) [A-1.8432-18](#) [COM2305-25.000-EXT](#) [A-14.7456-18](#) [AS-4.000-20-SMD-TR](#) [RST-W2-P-N-E](#) [AS-27.000-18](#) [CO4605-125.000-EXT-T-TR](#) [CO2520-8.000-33-50-X](#) [CO4305-12.000-EXT](#) [AS-9.8304-18](#) [VC7250A-LZ-100](#) [RH100-10.000-18-3030-EXT](#) [H10S-25.000-18-F-3030-EXT](#) [CO4305-24.000-EXT-T-TR](#) [AS-14.31818-18](#) [H13-16.384-18-F-3030-EXT](#) [H13-24.000-18-F-3030-EXT](#) [R1612-27.120-8-F-3030-EXT](#) [RST-W1A4-17512-22M-H-001](#) [CO2016-10.000-3.3-50](#) [AS-12.000-18](#) [TU2045A-LZ-0.28-19.440-S3-3](#) [RH100-12.000-18-3030-EXT](#) [RST-MB-15338-22-G-001](#) [CO1100-32.000](#) [A-2.000-18](#) [AS-25.000-18](#) [H130B-24.000-18-3030-EXT](#) [CO43025-50.000-EXT-T-TR](#) [AS-4.000-18-SMD-TR](#) [CE8450B-LZ-125.000-T-4](#) [AS-14.31818-18-SMD](#) [A-10.000-18](#) [AS-6.000-18](#) [A-24.000-18](#) [A-11.0592-18](#) [CO1100-10.000](#) [AS-12.000-20](#) [A-7.3728-18](#) [CO12100-16.000MHZ](#) [CO1100-7.3728](#) [CO1100-24.000](#) [A-2.4576-18](#) [AS-4.000-20](#) [AS-8.000-18](#) [AS-5.000-18-EXT-SMD-TR](#) [RPA-PB0-486392-1-G-001](#) [RPC-W2-P-35-70-G](#) [AS-14.31818-20](#)