

Features

- Sealed Construction
- Long Life
- Small Size
- Low Coil Power
- PC Board Mount
- TV-5 Type Power Relay




R22 Series




Slimline 16 Amp SPST-NO & SPDT Relays Designed for use in TVs, Door Openers, & Security Systems.


D51

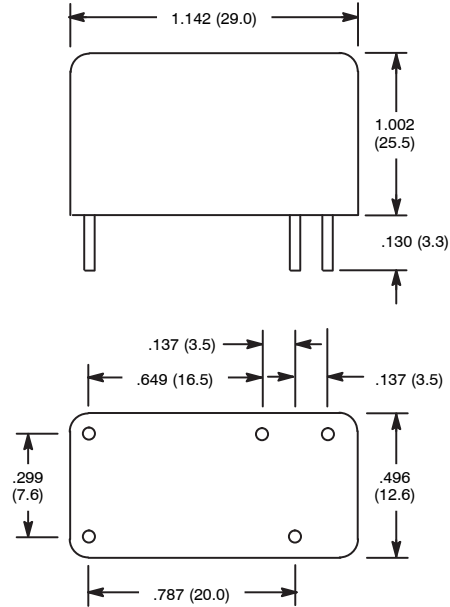

SPST-NO, 1 Form "A"



SPDT, 1 Form "C"



DC OPERATED						
NTE Type No.	Nom. Voltage	Contact Arr.	Coil Res. Ohms (Typ)	Nom. Power	Max. Contact Make Cur. @ 30VDC or 120VAC (Note 1)	Diag No.
R22-1D16-3	3VDC	SPST-NO	12.5	720mW	16A	D51
R22-1D16-5/6	5/6VDC	SPST-NO	47	540mW	16A	D51
R22-1D16-12	12VDC	SPST-NO	270	540mW	16A	D51
R22-1D16-24	24VDC	SPST-NO	1100	540mW	16A	D51
R22-1D16-48	48VDC	SPST-NO	4400	540mW	16A	D51
R22-5D16-3	3VDC	SPDT	12.5	720mW	16A	D51
R22-5D16-5/6	5/6VDC	SPDT	47	540mW	16A	D51
R22-5D16-12	12VDC	SPDT	270	540mW	16A	D51
R22-5D16-24	24VDC	SPDT	1100	540mW	16A	D51
R22-5D16-48	48VDC	SPDT	4400	540mW	16A	D51

Note 1. The maximum contact make current is defined as the maximum permitted current for 4 seconds duration with 10% duty cycle immediately after contact closure.

ACCESSORIES		
MOUNTING STYLES	DESCRIPTION	NTE TYPE NO.
PC MOUNT	5-PIN SLIM LINE	R95-133
DIN RAIL MOUNT	5-PIN SLIM LINE	R95-130

Electrical Specifications

Contact

Rating: 12 Amp (Continuous, Note 2) @ 250 VAC

Contact Material: AgCdo

Contact Resistance: 100MΩ Max.

Note 2. Continuous contact current is defined as the maximum current a relay contact may carry continuously without exceeding temperature limits.

Coil

Coil Voltages: See Chart

Pick-up Voltage: 80% of rated voltage

Drop-out Voltage: 5% of rated voltage

Max Allowable Voltage: 110% of rated voltage

Operational Characteristics

Timing Value Operate Time: 30 mS Max
Release Time: 8 mS Max

Insulation Characteristics

Dielectric Strength

Contact To Coil: 500 VRMS (1 Min)

Across Open Contacts: 1000 VRMS (1 Min)

Insulation Resistance: 100 MΩ Min.
@ 500 VDC

Environmental Characteristics

Operating: -30°C to +70°C

Mechanical Life: 10,000,000 operations min

Weight

Std: 13 gram approx.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [General Purpose Relays](#) category:

Click to view products by [NTE](#) manufacturer:

Other Similar products are found below :

[APF30318](#) [JVN1AF-4.5V-F](#) [PCN-105D3MHZ](#) [5JO-10000S-SIL](#) [5JO-1000CD-SIL](#) [5JO-400CD-SIL](#) [LY2S-AC220/240](#) [LYQ20DC12](#)
[6031007G](#) [6131406HQ](#) [6-1393099-3](#) [6-1393099-8](#) [6-1393122-4](#) [6-1393123-2](#) [6-1393767-1](#) [6-1393843-7](#) [6-1415012-1](#) [6-1419102-2](#) [6-](#)
[1423698-4](#) [6-1608051-6](#) [6-1608067-0](#) [6-1616170-6](#) [6-1616248-2](#) [6-1616282-3](#) [6-1616348-2](#) [6-1616350-1](#) [6-1616350-8](#) [6-1616358-7](#) [6-](#)
[1616359-9](#) [6-1616360-9](#) [6-1616931-6](#) [6-1617039-1](#) [6-1617052-1](#) [6-1617090-2](#) [6-1617090-5](#) [6-1617347-5](#) [6-1617353-3](#) [6-1617801-8](#) [6-](#)
[1617802-2](#) [6-1618107-9](#) [6-1618248-4](#) [M83536/1-027M](#) [CX-4014](#) [MAHC-5494](#) [MAVCD-5419-6](#) [703XCX-120A](#) [7-1393100-5](#) [7-1393111-7](#)
[7-1393144-5](#) [7-1393767-8](#)