

# HD151015

9 bit Level Shifter/Transceiver With 3 State Outputs R04DS0043EJ0600

(Previous: REJ03D0300-0500)

Rev.6.00 May 30, 2014

### **Description**

The HD151015 is an IC which consists of 9 bus transceivers (three state output) in a 24 pin package. Signals are transmitter from A to B when the direction control input (DiR) is at a high level, and from B to A when DiR is at a low level. When the enable input ( $\overline{G}$ ) is high, A and B are isolated. And this product has two terminals ( $V_{CCA}$ ,  $V_{CCB}$ ),  $V_{CCA}$  is connected with control input and A bus side,  $V_{CCB}$  is connected with B bus side.  $V_{CCA}$  and  $V_{CCB}$  are isolated. Consequently, it is best to change the level in case of two supply voltage coexist on one board and application of power management.

#### **Features**

- This product function as level shift transceiver that change V<sub>CCA</sub> input level to V<sub>CCB</sub> output level, V<sub>CCB</sub> input level to V<sub>CCA</sub> output level by providing different supply voltages to V<sub>CCA</sub> and V<sub>CCB</sub>.
- This product is able to the power management: Turn on and off the supply on  $V_{CCB}$  side with providing the supply of  $V_{CCA}$ .

(Enable input  $(\overline{G})$ : High level)


- Inputs and outputs are CMOS level, and the power dissipation is the same as CMOS standard logic.
- Wide operating supply voltage range:

$$V_{CCA} = V_{CCB} = 2$$
 to 6 V  $(V_{CCB} \ge V_{CCA} - 0.5 \text{ V})$ 

- Wide operating temperature range: Ta = -40 to  $85^{\circ}C$
- Ordering Information

Part Name	Package Type	Package Code (Previous Code)	Package Abbreviation	Taping Abbreviation (Quantity)	
151015TEL-E	TSSOP-24 pin	PTSP0024JB-A (TTP-24DBV)	Т	EL (1,000 pcs/reel)	

### **Pin Arrangement**

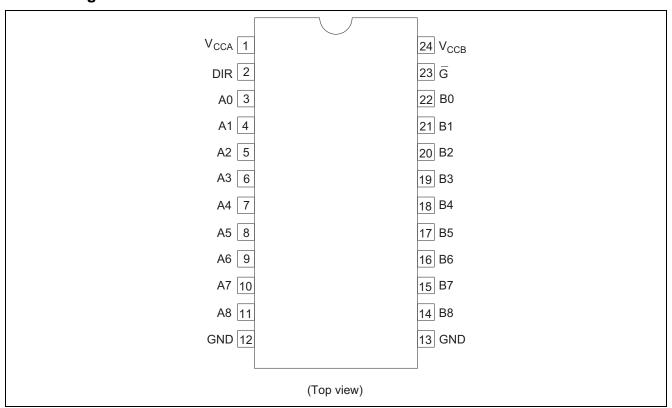

#### **Function Table**

Inputs		
G	DIR	Outputs
L	L	B data to A bus
L	Н	A data to B bus
Н	X	Z

H : High levelL : Low levelZ : High ImpedanceX : Immaterial

### **Absolute Maximum Ratings**

Item	Symbol	Rating	Unit	Conditions
Supply Voltage	$V_{CCA}, V_{CCB}$	-0.5 to +7.0	V	
Input Diode Current	I <sub>IK</sub>	-20	mA	V <sub>I</sub> = -0.5
		20	mA	$V_{I} = V_{CC} + 0.5$
Input Voltage	V <sub>IN</sub>	-0.5 to V <sub>CC</sub> + 0.5	V	
Output Diode Current	I <sub>OK</sub>	-50	mA	V <sub>O</sub> = -0.5
		50	mA	$V_{\rm O} = V_{\rm CC} + 0.5$
Output Voltage	V <sub>OUT</sub>	-0.5 to V <sub>CC</sub> + 0.5	V	
Output Current	I <sub>O</sub>	±50	mA	
VCC or Ground Current	I <sub>CC</sub> or I <sub>GND</sub>	±50	mA	per output pin
Storage Temperature	Tstg	–65 to + 150	°C	

Note: 1. The absolute maximum ratings are values which must not individually be exceeded, and furthermore, no two of which may be realized at the same time.


### **Recommended Operating Conditions**

Item	Symbol	Rating	Unit	Conditions
Supply voltage	V <sub>CCA, B</sub>	2.0 to 6.0	V	$V_{CCB} \ge V_{CCA} - 0.5 \text{ V}$
Input voltage	V <sub>IN</sub>	0 to V <sub>CC</sub>	V	
Output voltage	$V_{OUT}$	0 to V <sub>CC</sub>	V	
Operating Temperature	T <sub>A</sub>	-40 to +85	°C	
Input Rise and Fall Time*1	t <sub>r</sub> , t <sub>f</sub>	8	ns/V	V <sub>CC</sub> @3.0 V (Input DiR, G, A)
				V <sub>CC</sub> @4.5 V (Input B)
				V <sub>CC</sub> @5.5 V (Input B)

Note: 1. The item guarantees maximum limit when one input switches.

Waveform: Refer to test circuit of switching characteristics.

### **Logick Diagram**

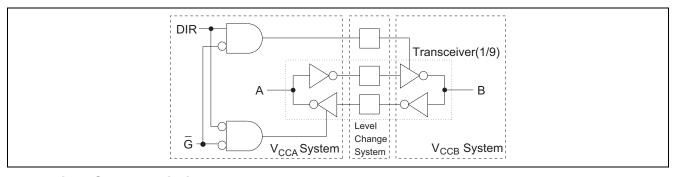

### **Electrical Characteristics**


	Sym-	V <sub>CCA</sub>	V <sub>CCB</sub>	7	Га = 25	°C	Ta = -40 to 85°C					
Item	bol	(V)	(V)	Min	Тур	Max	Min	Max	Unit	Conditions		
Input Voltage	$V_{IH}$	3.0	3.0	2.1	1.5	_	2.1	_	V	$V_{OUT} = 0.1 \text{ V or } V_{CC} - 0.1 \text{ V}$		
		4.5	4.5	3.15	2.25	_	3.15	_				
		5.5	5.5	3.85	2.75	_	3.85	_				
	$V_{IL}$	3.0	3.0	_	1.5	0.9	_	0.9	V	$V_{OUT} = 0.1 \text{ V or } V_{CC} - 0.1 \text{ V}$		
		4.5	4.5	_	2.25	1.35	_	1.35				
		5.5	5.5	_	2.75	1.65	_	1.65				
Output	$V_{OH}$	2.7	4.5	2.6	2.69	_	2.6	_	V	$V_{IN} = V_{IL} \text{ or } V_{IH}, I_{OH} = -50  \mu\text{A}  \text{A*}^1$		A* <sup>1</sup>
Voltage		2.7	4.5	4.4	4.49	_	4.4	_		$V_{IN} = V_{IL}$ or $V_{I}$	$_{H}$ , $I_{OH} = -50 \mu A$	В
		2.7	4.5	2.3	_	_	2.2	_	V	V <sub>IN</sub> =	$I_{OH} = -4 \text{ mA}$	A
		2.7	4.5	3.9	_	_	3.8	_		$V_{IL}$ or $V_{IH}$	$I_{OH} = -12 \text{ mA}$	В
	$V_{OL}$	2.7	4.5	_	0.001	0.1	_	0.1	V	$V_{IN} = V_{IL}$ or $V_{IH}$ , $I_{OL} = 50 \mu A$ A.B		A.B
		2.7	4.5	_	_	0.32	_	0.37	V	$V_{IN} = V_{IL}$ or $V_{IH}$ , $I_{OL} = 12$ mA A.B		A.B
Input Current	I <sub>IN</sub>	3.3	5.5	_	_	±0.1	_	±1.0	μΑ	V <sub>IN</sub> = V <sub>CC</sub> or GND		
Off State	l <sub>OZ</sub>	3.3	5.5	_	_	±0.5	_	±5.0	μΑ	$V_{IN}(\overline{G}) = V_{IH}, V_{IN} = V_{CC} \text{ or GND},$		
Output										$V_{OUT} = V_{CC}$ or	GND	
Current												
Supply	I <sub>CCA.B</sub>	3.3	5.5	_	_	8.0	_	80	μΑ	$V_{IN} = V_{CC}$ or GND		
Current	$I_{CCA}$	5.5	0			8.0		80	μΑ	$V_{IN} = V_{CC}$ or GND, B Input OPEN		

Note: 1. A: Output A, B: Output B, A.B: Output A.B

## **Switching Characteristics**


		Ta = 25°C			Ta = -40 to 85°C			
		$V_{CCA} = 3.0 \text{ V}, V_{CCB} = 5.0 \text{ V}$		$V_{CC} = 2.7 \text{ V}, V_{CCB} = 4.5 \text{ V}$				
Item	Symbol	Min	Тур	Max	Min	Max	Unit	Conditions
Propagation Delay Time	t <sub>PLH</sub>	1.0	5.0	10.0	1.0	12.0	ns	$B\toA$
		1.0	5.0	10.0	1.0	12.0		$A \to B$
	t <sub>PHL</sub>	1.0	5.0	10.0	1.0	12.0	ns	$B\toA$
		1.0	5.0	10.0	1.0	12.0		$A \to B$
Output Enable Time	$t_{ZH}$	1.0	8.0	16.0	1.0	20.0	ns	$\overline{G} \to A$
		1.0	8.0	16.0	1.0	20.0		$\overline{G} \to B$
	$t_{ZL}$	1.0	9.0	16.0	1.0	20.0	ns	$\overline{G} \to A$
		1.0	9.0	16.0	1.0	20.0		$\overline{G} \to A$
Output Disable Time	t <sub>HZ</sub>	1.0	9.0	16.0	1.0	20.0	ns	$\overline{G} \to A$
		1.0	9.0	16.0	1.0	20.0		$\overline{G} \to B$
	$t_{LZ}$	1.0	8.0	16.0	1.0	20.0	ns	$\overline{G} \to A$
		1.0	8.0	16.0	1.0	20.0		$\overline{G} \to B$

# Input and Output Equivalent Circuit

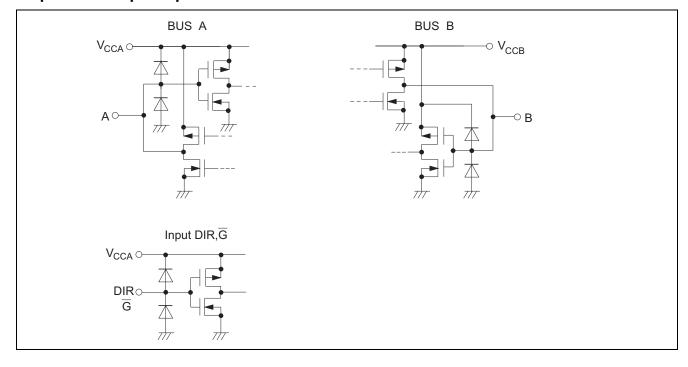

### **Switching Time Test Method**


#### **Test Circuit**

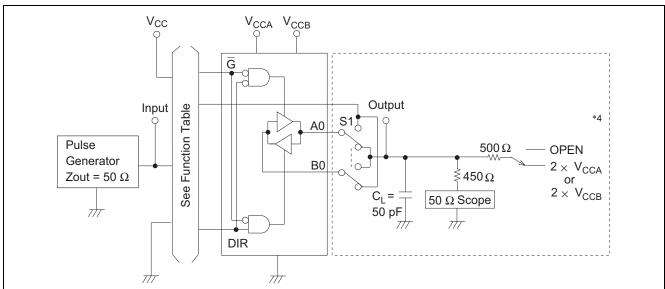


Notes:

- 1.  $C_L$  includes probe and jig capacitance.
- 2. A1-B1, A2-B2, A3-B3, A4-B4, A5-B5, A6-B6, A7-B7, A8-B8 are identical to above circuit.
- 3. S1 is a input/output switch.
- 4. When A  $\rightarrow$  B:  $2 \times V_{CCB}$ , B  $\rightarrow$  A:  $2 \times V_{CCA}$

#### Waveforms-1

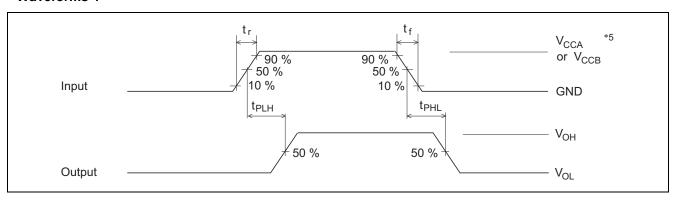

#### Waveforms-2

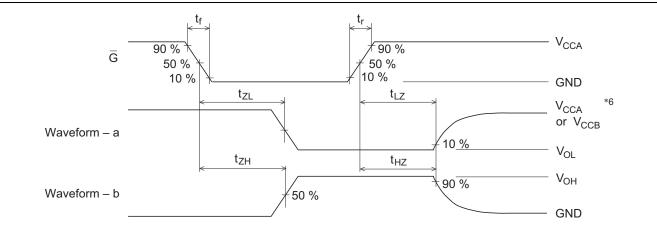


Notes:


- 1.  $t_r = t_f = 2.5 \text{ ns.}$
- 2. Input Waveform: PRR = 1 MHz, duty cycle 50%
- 3. Waveform-a is set as outputs are "Low" when enable input is "Low".
- 4. Waveform-b is set as outputs are "High" when enable input is "Low".
- 5. When A  $\rightarrow$  B:  $V_{CCA}$ , B  $\rightarrow$  A :  $V_{CCB}$
- 6. When  $\overline{G} \to A$ :  $V_{CCA}$ ,  $\overline{G} \to B$ :  $V_{CCB}$

### **Typical Characteristic Curves**

### Propagation Delay Times vs Power Supply ( $V_{\text{CCA}}, V_{\text{CCB}}$ )

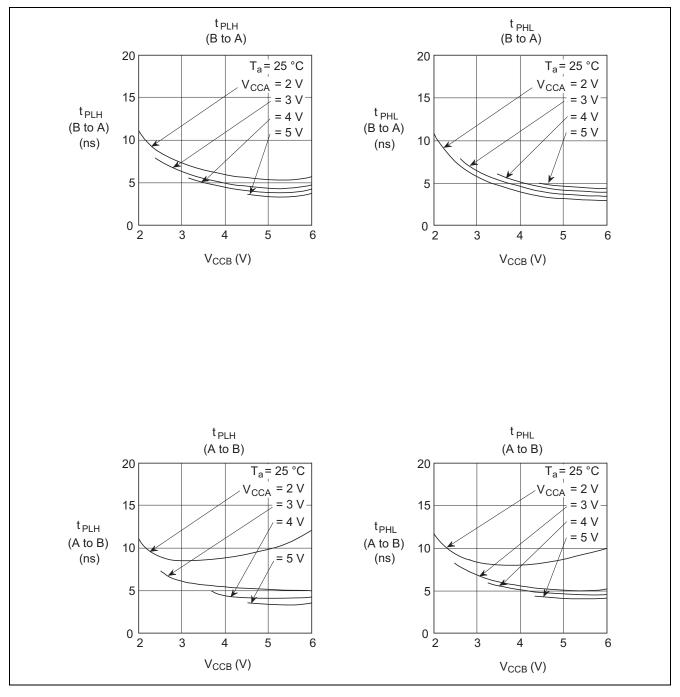

#### **Output Voltage vs Output Current**

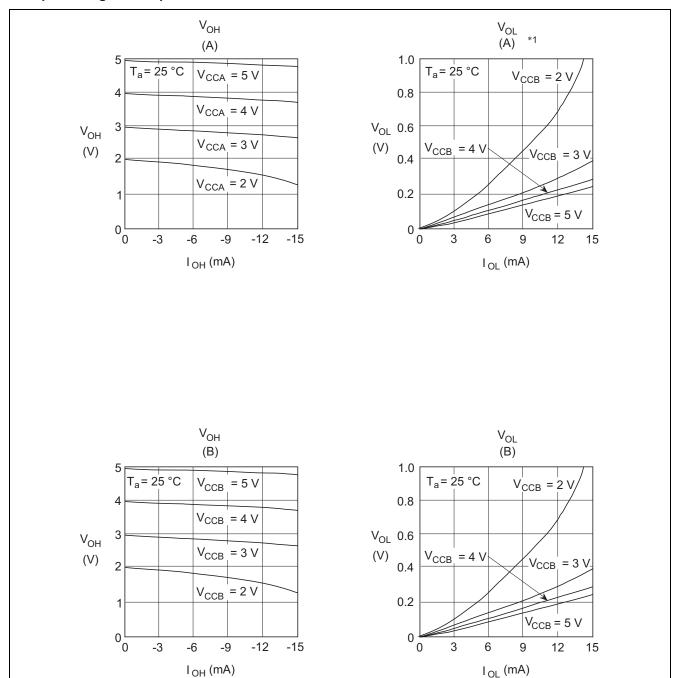


Note:

1.  $V_{OL}$  (A) does not depend on  $V_{CCA}$ 

#### **Application**

#### For power management system (1)

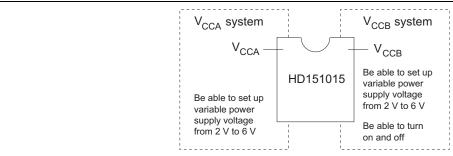


Note: HD151015 is also used for power management system. We show some Examples.

- 1. For V<sub>CCA</sub> side
  - Be able to switch fast mode ( $V_{CCA} = 5 \text{ V}$ ) and power save mode ( $V_{CCA} = 3 \text{ V}$ )
- 2. For V<sub>CCB</sub> side
  - Be able to switch normal mode ( $V_{CCB} = 5 \text{ V}$ ) and suspend mode ( $V_{CCB} = 0 \text{ V}$ )
- 3. For both side

Be able to switch fast mode ( $V_{CCA} = 5 \text{ V}$ ) and power save mode ( $V_{CCA} = 3 \text{ V}$ ) (When  $V_{CCA} = V_{CCB}$ , in this case, please switch  $V_{CCA}$  and  $V_{CCB}$  simulteneously.)

#### For power management system (2) (Common bus line in different power system)

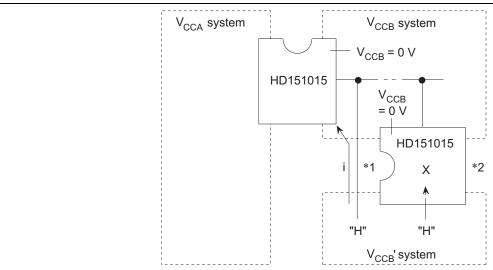

HD151015 uses conventional CMOS input circuit. So, you have to care of designing in case of common bus line in different power block. We show one example.


In this case, if  $V_{CCB}$  become turn off, current flows from bus line to  $V_{CCB}$ . (refer to  $*^1$ )

This is cause of malfunction. In order to prevent this problem, I recommend using this device for interface to each power block. (refer to  $*^2$ )

#### [Cautions on using]

Please use this IC on condition of  $V_{CCA}$  usually ON, because if you use it on condition of  $V_{CCA}$  being OFF,  $V_{CCB}$  being ON, it will be troubled.

### **Package Dimensions**

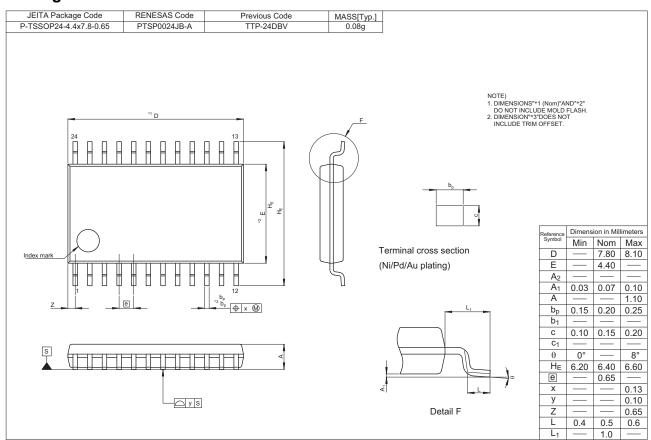

#### **Notice**

- 1. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation of these circuits, software, and information in the design of your equipment. Renesas Electronics assumes no responsibility for any losses incurred by you or third parties arising from the use of these circuits, software, or information.
- 2. Renesas Electronics has used reasonable care in preparing the information included in this document, but Renesas Electronics does not warrant that such information is error free. Renesas Electronics assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein
- 3. Renesas Electronics does not assume any liability for infringement of patents, copyrights, or other intellectual property rights of third parties by or arising from the use of Renesas Electronics products or technical information described in this document. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or
- 4. You should not alter, modify, copy, or otherwise misappropriate any Renesas Electronics product, whether in whole or in part. Renesas Electronics assumes no responsibility for any losses incurred by you or third parties arising from such alteration, modification, copy or otherwise misappropriation of Renesas Electronics product.
- 5. Renesas Electronics products are classified according to the following two quality grades: "Standard" and "High Quality". The recommended applications for each Renesas Electronics product depends on the product's quality grade, as indicated below

"Standard": Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; and industrial robots etc.

"High Quality": Transportation equipment (automobiles, trains, ships, etc.); traffic control systems; anti-disaster systems; anti-crime systems; and safety equipment etc.

Renesas Electronics products are neither intended nor authorized for use in products or systems that may pose a direct threat to human life or bodily injury (artificial life support devices or systems, surgical implantations etc.), or may cause serious property damages (nuclear reactor control systems, military equipment etc.). You must check the quality grade of each Renesas Electronics product before using it in a particular application. You may not use any Renesas Electronics product for any application for which it is not intended. Renesas Electronics shall not be in any way liable for any damages or losse incurred by you or third parties arising from the use of any Renesas Electronics product for which the product is not intended by Renesas Electronics

- 6. You should use the Renesas Electronics products described in this document within the range specified by Renesas Electronics, especially with respect to the maximum rating, operating supply voltage range, movement power voltage range, heat radiation characteristics, installation and other product characteristics. Renesas Electronics shall have no liability for malfunctions or damages arising out of the ise of Renesas Electronics products beyond such specified ranges.
- 7. Although Renesas Electronics endeavors to improve the quality and reliability of its products, semiconductor products have specific characteristics such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Further, Renesas Electronics products are not subject to radiation resistance design. Please be sure to implement safety measures to guard them against the possibility of physical injury, and injury or damage caused by fire in the event of the failure of a Renesas Electronics product, such as safety design for hardware and software including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult, please evaluate the safety of the final products or systems manufactured by you.
- 8. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. Please use Renesas Electronics products in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. Renesas Electronics assumes no liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
- 9. Renesas Electronics products and technology may not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations. You should not use Renesas Electronics products or technology described in this document for any purpose relating to military applications or use by the military, including but not limited to the development of weapons of mass destruction. When exporting the Renesas Electronics products or technology described in this document, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations
- 10. It is the responsibility of the buyer or distributor of Renesas Electronics products, who distributes, disposes of, or otherwise places the product with a third party, to notify such third party in advance of the contents and conditions set forth in this document, Renesas Electronics assumes no responsibility for any losses incurred by you or third parties as a result of unauthorized use of Renesas Electronics products.
- 11. This document may not be reproduced or duplicated in any form, in whole or in part, without prior written consent of Renesas Electronics
- 12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products, or if you have any other inquiries. (Note 1) "Renesas Electronics" as used in this document means Renesas Electronics Corporation and also includes its majority-owned subsidiaries
- (Note 2) "Renesas Electronics product(s)" means any product developed or manufactured by or for Renesas Electronics



#### **SALES OFFICES**

#### Renesas Electronics Corporation

http://www.renesas.com

Refer to "http://www.renesas.com/" for the latest and detailed information

Renesas Electronics America Inc. 2801 Scott Boulevard Santa Clara, CA 95050-2549, U.S.A. Tel: +1-408-588-6000, Fax: +1-408-588-6130

Renesas Electronics Canada Limited 1101 Nicholson Road, Newmarket, Ontario L3Y 9C3, Canada Tel: +1-905-898-5441, Fax: +1-905-898-3220

Renesas Electronics Europe Limited Dukes Meadow, Millboard Road, Bourne End, Buckinghamshire, SL8 5FH, U.K Tel: +44-1628-585-100, Fax: +44-1628-585-900

Renesas Electronics Europe GmbH

Arcadiastrasse 10, 40472 Düsseldorf, Germany Tel: +49-211-6503-0, Fax: +49-211-6503-1327

Renesas Electronics (China) Co., Ltd. Room 1709, Quantum Plaza, No.27 ZhiChunLu Haidian District, Beijing 100191, P.R.China Tei: +86-10-2035-1155, Fax: +86-10-8235-7679

Renesas Electronics (Shanghai) Co., Ltd.
Unit 301, Tower A, Central Towers, 555 Langao Road, Putuo District, Shanghai, P. R. China 200333
Tel: +86-21-2226-0888, Fax: +86-21-2226-0999

Renesas Electronics Hong Kong Limited
Unit 1601-1613, 161F., Tower 2, Grand Century Place, 193 Prince Edward Road West, Mongkok, Kowloon, Hong Kong
Tel: +852-2856-5688, Fax: +852 2886-9022/9044

Renesas Electronics Taiwan Co., Ltd. 13F, No. 363, Fu Shing North Road, Taipei 105-Tel: +886-2-8175-9600, Fax: +886 2-8175-9670 . ipei 10543, Taiwan

Renesas Electronics Singapore Pte. Ltd. 80 Bendemeer Road, Unit #06-02 Hyflux Innovation Centre, Singapore 339949 Tel: +65-6213-0200, Fax: +65-6213-0300

Renesas Electronics Malaysia Sdn.Bhd.
Unit 906, Block B, Menara Amcorp, Amcorp Trade Centre, No. 18, Jln Persiaran Barat, 46050 Petaling Jaya, Selangor Darul Ehsan, Malaysia
Tel: +60-3-7955-9390, Fax: +60-3-7955-9510

Renesas Electronics Korea Co., Ltd. 12F., 234 Teheran-ro, Gangnam-Ku, Seoul, 135-920, Korea Tel: +82-2-558-3737, Fax: +82-2-558-5141

© 2014 Renesas Electronics Corporation. All rights reserved.

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Translation - Voltage Levels category:

Click to view products by Renesas manufacturer:

Other Similar products are found below:

NLSX4373DMR2G NLSX5012MUTAG HV583GA-G MC10H641FNR2G NLSX0102FCT1G NLSX0102FCT2G
NLSX4302EBMUTCG NLVSX4373DR2G PCA9306FMUTAG SY10H351JZ MC100EPT622MNG MAX9374AEKA+T MAX3378EETD+
MAX34405BEZT+ NLSX3014MUTAG NVT4556BUKZ NLSV4T244EMUTAG NLSX5011MUTCG NLV9306USG
NLVSX4014MUTAG MAX34405BEZT+T NLSV4T3144MUTAG NSV12200LT1G NLVSX4373MUTAG NB3U23CMNTAG
MAX3371ELT+T MAX3008EUP+T NLVPCA9306AMUTCG NLSX3013BFCT1G MAX9378EUA+T NLV7WBD3125USG
NLV14504BDTG NLSX3012DMR2G NLSX5012DR2G MAX3391EEUD+T MAX3379EETD+ PI4ULS3V4857GEAEX
MAX3391EEBC+T MAX14842ATE+T 74AVCH1T45FZ4-7 CLVC16T245MDGGREP HEF4104BT TC74LCX16245(EL,F)
MC10H124FNG CAVCB164245MDGGREP 7WBD383USG NVT2001GM,115 CLVC8T245MRHLTEP 74LVC1G175GS,132