



No.390, Yong He Road,  
Shanghai 200072, China

## TECHNICAL DATA SHEET CABLE ASSEMBLY

PART NUMBER :R284C0351055

Issue : NA

Date : NA


Customer :

Specification : NA

Issue : NA

Date : N/A

All dimensions are in mm

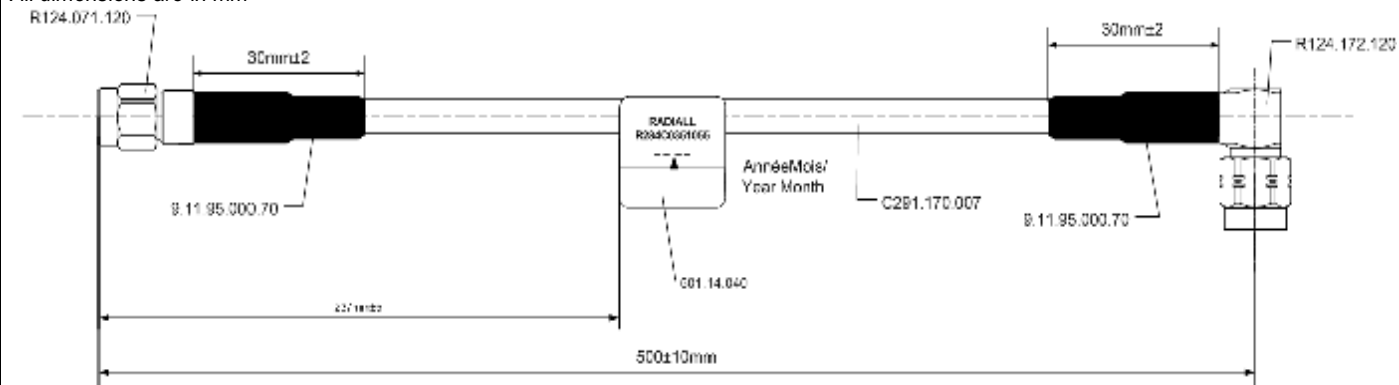

Connectors designation :

**Connector 1 : SMA Straight Plug Crimp Type  
Cable 2.6/50 S (R124.071.120)**

**Connector 2 : SMA Right Angle Plug Crimp Type  
Cable 2.6/50 S (R124.172.120)**

Cable designation :

**Flexible Cable 2.6/50S (RG316)**

**C291.170.007**

Nominal length :

**Lg: 500 mm**

Cable colour :

**Brown**

Outer diameter :

**2.49 mm**

Accessories :

**HeatShrink Sleeves (9.11.95.000.70)**

### ELECTRICAL CHARACTERISTICS :

#### High Frequency

Characteristic impedance : **50± 2 Ohms**

Frequency range : **DC-3GHz**

Insertion Loss : **0.96 dB max @ 3GHz & 20°C**

VSWR. : **TBT**

#### Low Frequency

Insulation Resistance : **5000 MOhms min**

Voltage Rating : **250 Veff max**

### MECHANICAL CHARACTERISTICS :

Recommend min. bend radius : **10 mm**

Cable crush resistance : **NA**

Life ( connectors ) : **100 cycles**

### ENVIRONMENTAL CHARACTERISTICS :

Operating temperature range : **-55° C to +135° C**

Remark : **NA**

Attachment : **R124.071.120-TDS , R124.172.120-TDS**

**C291.170.007 (RG316)-TDS**

**Cable Assembly is RoHS compliant.**

### CUSTOMER'S APPROVAL

**Service or  
Company's stamp**

**Name  
Date**

Peter	A	2007-5-25	Creation	Willy
Name	Issue	Date	Modification	Checked by



No.390, Yong He Road,  
Shanghai 200072, China

## TECHNICAL DATA SHEET CABLE ASSEMBLY

PART NUMBER :R284C0351056

Issue : NA

Date : NA


Customer :

Specification : NA

Issue : NA

Date : N/A

All dimensions are in mm

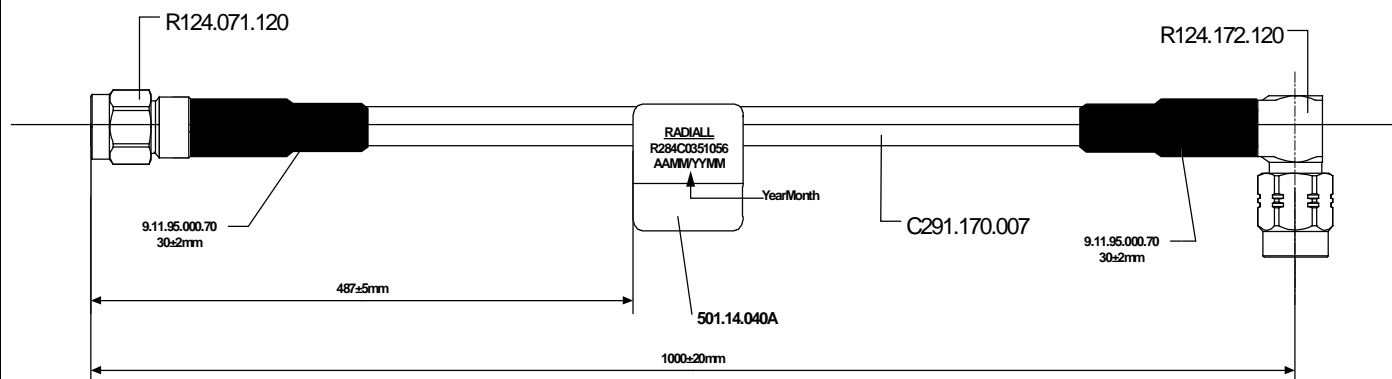

Connectors designation :

**Connector 1 : SMA Straight Plug Crimp Type  
Cable 2.6/50 S (R124.071.120)**

**Connector 2 : SMA Right Angle Plug Crimp Type  
Cable 2.6/50 S (R124.172.120)**

Cable designation :

**Flexible Cable 2.6/50S (RG316)  
C291.170.007**

Nominal length :

**Lg: 1000 mm**

Cable colour :

**Brown**

Outer diameter :

**2.49 mm**

Accessories :

**HeatShrink Sleeves (9.11.95.000.70)**

### ELECTRICAL CHARACTERISTICS :

#### High Frequency

Characteristic impedance : **50± 2 Ohms**

Frequency range : **DC-3GHz**

Insertion Loss : **1.81 dB max @ 3GHz & 20°C**

VSWR. : **TBT**

#### Low Frequency

Insulation Resistance : **5000 MOhms min**

Voltage Rating : **250 Veff max**

### MECHANICAL CHARACTERISTICS :

Recommend min. bend radius : **10 mm**

Cable crush resistance : **NA**

Life ( connectors ) : **100 cycles**

### ENVIRONMENTAL CHARACTERISTICS :

Operating temperature range : **-55° C to +135° C**

Remark : **NA**

Attachment : **R124.071.120-TDS , R124.172.120-TDS**

**C291.170.007 (RG316)-TDS**

**Cable Assembly is RoHS compliant.**

### CUSTOMER'S APPROVAL

**Service or  
Company's stamp**

**Name  
Date**

Peter	A	2007-5-25	Creation	Willy
Name	Issue	Date	Modification	Checked by

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [radiall](#) manufacturer:*

Other Similar products are found below :

[F760858219](#) [8959-1511-004](#) [5919-1503-000](#) [7101-1541-010](#) [7105-1561-010](#) [MD11-035](#) [81-6201-0450](#) [9074-9513-000](#) [9620-9003-151](#)  
[R113425097](#) [R114305000W](#) [R124075210](#) [R125055000](#) [R125512000W](#) [R141154000W](#) [R141572000](#) [R143012000](#) [R143235161W](#)  
[R166268000](#) [R176019000](#) [R191841001W](#) [R282102000](#) [R282744220](#) [R282918120](#) [R404770000](#) [R414430150](#) [R414520150](#) [R433514700](#)  
[R570022105](#) [R570123005](#) [R570363010](#) [R570442000](#) [R570E52010](#) [R574402410](#) [R585423230](#) [R114425000](#) [R124510000](#) [R125052500](#)  
[R125320020W](#) [R141331500W](#) [R162017000W](#) [R176404000](#) [R191970091](#) [R282120010](#) [R282750000](#) [R317270000](#) [R404110150](#)  
[R404280150](#) [R404755000](#) [R413210150](#)