# HA17431 Series

Shunt Regulator

REJ03D0678-0200 (Previous: ADE-204-049A) Rev.2.00 Jun 15, 2005


# Description

The HA17431 series is temperature-compensated variable shunt regulators. The main application of these products is in voltage regulators that provide a variable output voltage. The on-chip high-precision reference voltage source can provide  $\pm 1\%$  accuracy in the V versions, which have a V<sub>KA</sub> max of 16 volts. The HA17431VLP, which is provided in the MPAK-5V package, is designed for use in switching mode power supplies. It provides a built-in photocoupler bypass resistor for the PS pin, and an error amplifier can be easily constructed on the supply side.


# Features

- The V versions provide 2.500 V  $\pm 1\%$  at Ta = 25°C
- The HA17431VLP includes a photocoupler bypass resistor (2 k $\Omega$ )
- The reference voltage has a low temperature coefficient
- The MPAK-5V(5-pin), MPAKV(3-pin) and UPAKV miniature packages are optimal for use on high mounting density circuit boards
- Car use is provided

# **Block Diagram**

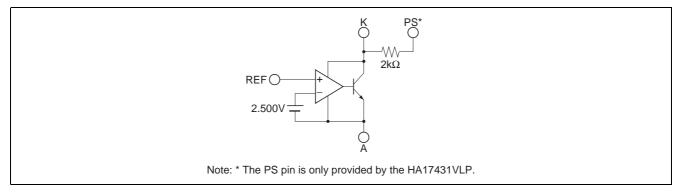

# **Application Circuit Example**

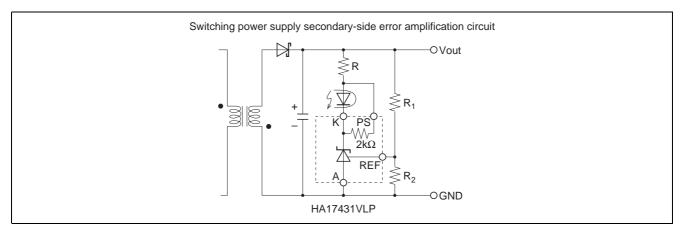




# **Ordering Information**

		Referenc	e voltage (at	25°C)		
	Item	Normal Version <u>±</u> 4% 2.395V to 2.495V to 2.595V	A Version ±2.2% 2.440V to 2.495V to 2.550V	V Version ±1% 2.475V to 2.500V to 2.525V	Package Code (Previous Code)	Operating Temperature Range
Car use	HA17431FPAJ		0		PRSP0008DE-B (FP-8DGV)	–40 to +85°C
	HA17431FPJ	0			PRSP0008DE-B (FP-8GDV)	
	HA17431PAJ		0		PRSS0003DC-A (TO-92MODV)	
	HA17431PJ	0			PRSS0003DC-A (TO-92MODV)	
	HA17431PNAJ		0		PRSS0003DA-A (TO-92V)	
	HA17431VPJ			0	PRSS0003DA-A (TO-92V)	
Industrial use	HA17431FP	0			PRSP0008DE-B (FP-8DGV)	–20 to +85°C
	HA17431FPA		0		PRSP0008DE-B (FP-8DGV)	
	HA17431P	0			PRSS0003DC-A (TO-92MODV)	
	HA17431PA		0		PRSS0003DC-A (TO-92MODV)	
	HA17431PNA		0		PRSS0003DA-A (TO-92V)	
	HA17431UPA		0		PLZZ0004CA-A (UPAKV)	
	HA17432UPA		0		PLZZ0004CA-A (UPAKV)	
	HA17431VLP			0	PLSP0005ZB-A (MPAK-5V)	
	HA17431VP			0	PRSS0003DA-A (TO-92V)	
	HA17431VUP			0	PLZZ0004CA-A (UPAKV)	
	HA17432VUP			0	PLZZ0004CA-A (UPAKV)	
	HA17431VLTP			0	PLSP0003ZB-A (MPAKV)	
	HA17432VLTP			0	PLSP0003ZB-A (MPAKV)	
Commercial use	HA17431UA		0		PLZZ0004CA-A (UPAKV)	–20 to +85°C
	HA17432UA		0		PLZZ0004CA-A (UPAKV)	



## **Pin Arrangement**

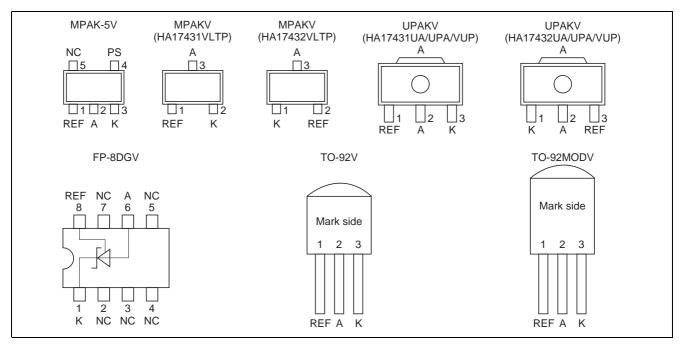



# Absolute Maximum Ratings

					Γ)	$a = 25^{\circ}C$
ltem	Symbol	HA17431VLP	HA17431VP	HA17431VPJ	Unit	Notes
Cathode voltage	V <sub>KA</sub>	16	16	16	V	1
PS term. voltage	V <sub>PS</sub>	V <sub>KA</sub> to 16	—	—	V	1,2,3
Continuous cathode current	Ι <sub>κ</sub>	-50 to +50	-50 to +50	-50 to +50	mA	
Reference input current	Iref	-0.05 to +10	-0.05 to +10	–0.05 to +10	mA	
Power dissipation	PT	150 * <sup>4</sup>	500 * <sup>5</sup>	500 * <sup>5</sup>	mW	4, 5
Operating temperature range	Topr	-20 to +85	-20 to +85	-40 to +85	°C	
Storage temperature	Tstg	-55 to +150	–55 to +150	-55 to +150		°C

Item	Symbol	HA17431VUP/HA17432VUP	HA17431VLTP/HA17432VLTP	Unit	Notes
Cathode voltage	Vka	16	16	V	1
PS term. voltage	V <sub>PS</sub>	—	_	V	1,2,3
Continuous cathode current	Ι <sub>K</sub>	-50 to +50	-50 to +50	mA	
Reference input current	Iref	–0.05 to +10	–0.05 to +10	mA	
Power dissipation	PT	800 * <sup>8</sup>	150 * <sup>4</sup>	mW	4, 8
Operating temperature range	Topr	-20 to +85	-20 to +85	°C	
Storage temperature	Tstg	-55 to +150	–55 to +150	°C	

ltem	Symbol	HA17431PNA	HA17431P/PA	HA17431FP/FPA	HA17431UA/UPA/ HA17432UA/UPA	Unit	Notes
Cathode voltage	Vка	40	40	40	40	V	1
Continuous cathode current	Ι <sub>Κ</sub>	-100 to +150	-100 to +150	-100 to +150	–100 to +150	mA	
Reference input current	Iref	-0.05 to +10	-0.05 to +10	–0.05 to +10	–0.05 to +10	mA	
Power dissipation	P <sub>T</sub>	500 * <sup>5</sup>	800 * <sup>6</sup>	500 * <sup>7</sup>	800 * <sup>8</sup>	mW	5,6,7,8
Operating temperature range	Topr	-20 to +85	-20 to +85	–20 to +85	-20 to +85	°C	
Storage temperature	Tstg	–55 to +150	–55 to +150	–55 to +125	-55 to +150	°C	



# Absolute Maximum Ratings (cont.)

					Γ)	$a = 25^{\circ}C$
ltem	Symbol	HA17431PNAJ	HA17431PJ/PAJ	HA17431FPJ/FPAJ	Unit	Notes
Cathode voltage	V <sub>KA</sub>	40	40	40	V	1
Continuous cathode current	I <sub>K</sub>	-100 to +150	-100 to +150	-100 to +150	mA	
Reference input current	Iref	-0.05 to +10	-0.05 to +10	-0.05 to +10	mA	
Power dissipation	PT	500 * <sup>5</sup>	800 * <sup>6</sup>	500 * <sup>7</sup>	mW	5,6,7
Operating temperature range	Topr	-40 to +85	-40 to +85	-40 to +85	°C	
Storage temperature	Tstg	–55 to +150	–55 to +150	-55 to +125	°C	

Notes: 1. Voltages are referenced to anode.

2. The PS pin is only provided by the HA17431VLP.

- 3. The PS pin voltage must not fall below the cathode voltage. If the PS pin is not used, the PS pin is recommended to be connected with the cathode.
- 4. Ta  $\leq$  25°C. If Ta > 25°C, derate by 1.2 mW/°C.
- 5. Ta  $\leq$  25°C. If Ta > 25°C, derate by 4.0 mW/°C.
- 6. Ta  $\leq$  25°C. If Ta > 25°C, derate by 6.4 mW/°C.
- 7. 50 mm  $\times$  50 mm  $\times$  1.5mmt glass epoxy board(5% wiring density), Ta  $\leq$  25°C. If Ta > 25°C, derate by 5 mW/°C.
- 8. 15 mm  $\times$  25 mm  $\times$  0.7mmt alumina ceramic board, Ta  $\leq$  25°C. If Ta > 25°C, derate by 6.4 mW/°C.



# **Electrical Characteristics**

## HA17431VLP/VP/VPJ/VUP/VLTP, HA17432VUP/VLTP

```
(Ta = 25^{\circ}C, I_{K} = 10 \text{ mA})
```


Item	Symbol	Min	Тур	Max	Unit	Test Conditions	Notes
Reference voltage	Vref	2.475	2.500	2.525	V	V <sub>KA</sub> = Vref	
Reference voltage temperature deviation	Vref(dev)	_	10	_	mV	V <sub>KA</sub> = Vref, Ta = -20°C to +85°C	1
Reference voltage temperature coefficient	∆Vref/∆Ta	—	±30	—	ppm/°C	V <sub>KA</sub> = Vref, 0°C to 50°C gradient	
Reference voltage regulation	$\Delta Vref/\Delta V_{KA}$	—	2.0	3.7	mV/V	V <sub>KA</sub> = Vref to 16 V	
Reference input current	Iref	_	2	6	μA	R <sub>1</sub> = 10 kΩ, R <sub>2</sub> = ∞	
Reference current temperature deviation	lref(dev)	_	0.5	_	μA	R <sub>1</sub> = 10 kΩ, R <sub>2</sub> = ∞, Ta = –20°C to +85°C	
Minimum cathode current	Imin	—	0.4	1.0	mA	V <sub>KA</sub> = Vref	2
Off state cathode current	loff	—	0.001	1.0	μA	V <sub>KA</sub> = 16 V, Vref = 0 V	
Dynamic impedance	Z <sub>KA</sub>	_	0.2	0.5	Ω	$V_{KA}$ = Vref, I <sub>K</sub> = 1 mA to 50 mA	
Bypass resistance	R <sub>PS</sub>	1.6	2.0	2.4	kΩ	I <sub>PS</sub> = 1 mA	3
Bypass resistance temperature coefficient	∆R <sub>PS</sub> /∆Ta	—	+2000	—	ppm/°C	I <sub>PS</sub> = 1 mA, 0°C to 50°C gradient	3

## HA17431PJ/PAJ/FPJ/FPAJ/P/PA/UA/UPA/FP/FPA/PNA/PNAJ, HA17432UA/UPA

 $(Ta = 25^{\circ}C, I_{K} = 10 \text{ mA})$ 

Item	Symbol	Min	Тур	Max	Unit	Tes	t Conditions	Notes
Reference voltage	Vref	2.440	2.495	2.550	V	V <sub>KA</sub> = Vref		А
		2.395	2.495	2.595				Normal
Reference voltage	Vref(dev)	_	11	(30)	mV	V <sub>KA</sub> = Vref	Ta =	1, 4
temperature deviation							–20°C to +85°C	
			5	(17)			Ta = 0°C to +70°C	1, 4
Reference voltage	$\Delta V ref / \Delta V_{KA}$		1.4	3.7	mV/V	V <sub>KA</sub> = Vref to 10 V		
regulation			1	2.2		V <sub>KA</sub> = 10 V to 40 V		
Reference input current	Iref	—	3.8	6	μA	$R_1 = 10 kΩ$	R <sub>2</sub> = ∞	
Reference current	lref(dev)	—	0.5	(2.5)	μA	$R_1 = 10 k\Omega$	R₂ = ∞,	4
temperature deviation						Ta = 0°C to	+70°C	
Minimum cathode current	Imin	_	0.4	1.0	mA	V <sub>KA</sub> = Vref		2
Off state cathode current	loff	_	0.001	1.0	μA	V <sub>KA</sub> = 40 V, Vref = 0 V		
Dynamic impedance	ZKA		0.2	0.5	Ω	V <sub>KA</sub> = Vref,		
						$I_{\rm K}$ = 1 mA to	o 100 mA	

Notes: 1. Vref(dev) = Vref(max) – Vref(min)




- 2. Imin is given by the cathode current at Vref =  $Vref_{(IK=10mA)} 15 \text{ mV}$ .
- 3.  $R_{PS}$  is only provided in HA17431VLP.
- 4. The maximum value is a design value (not measured).



# MPAK-5V(5-pin), MPAKV(3-pin) and UPAKV Marking Patterns

The marking patterns shown below are used on MPAK-5V, MPAKV and UPAKV products. Note that the product code and mark pattern are different. The pattern is laser-printed.

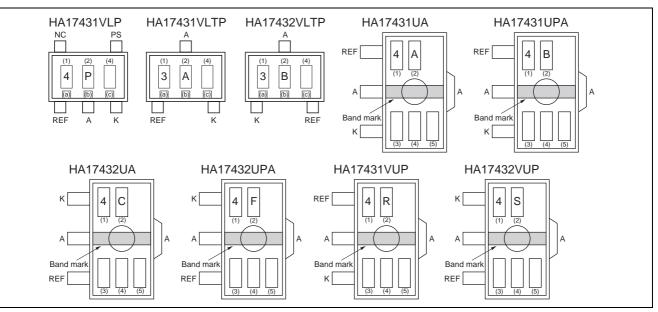

Notes: 1. Boxes (1) to (5) in the figures show the position of the letters or numerals, and are not actually marked on the package.

2. The letters (1) and (2) show the product specific mark pattern.

Product	(1)	(2)
HA17431VLP	4	Р
HA17431VUP	4	R
HA17432VUP	4	S
HA17431VLTP	3	A
HA17432VLTP	3	B
HA17431UA	4	A
HA17431UPA	4	B
HA17432UA	4	
HA17432UPA	4	F

3. The letter (3) shows the production year code (the last digit of the year) for UPAKV products.

4. The bars (a), (b) and (c) show a production year code for MPAK-5V and MPAKV products as shown below. After 2010 the code is repeated every 8 years.

Year	2002	2003	2004	2005	2006	2007	2008	2009
(a)	None	None	None	Bar	Bar	Bar	Bar	None
(b)	None	Bar	Bar	None	None	Bar	Bar	None
(C)	Bar	None	Bar	None	Bar	None	Bar	None

5. The letter (4) shows the production month code (see table below).


•••		•• p.						<i>.</i>					
	Production month	Jan.	Feb.	Mar.	Apr.	May.	Jun.	Jul.	Aug.	Sep.	Oct.	Nov.	Dec.
	Marked code	А	В	С	D	E	F	G	Н	J	K	L	М

6. The letter (5) shows manufacturing code. For UPAKV products.




## **Characteristics Curves**

## HA17431VLP/VP/VPJ/VUP/VLTP, HA17432VUP/VLTP

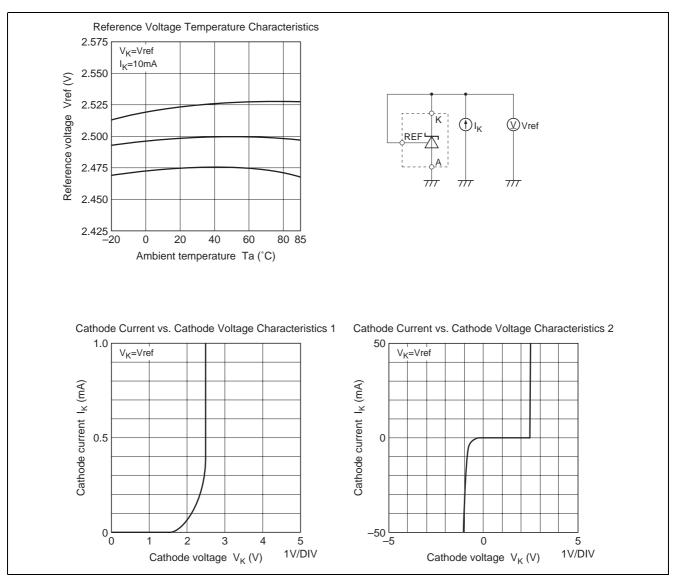




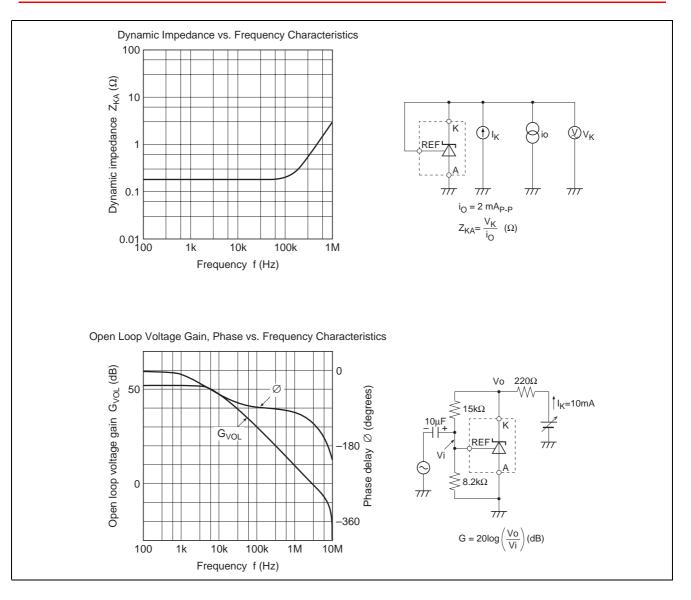







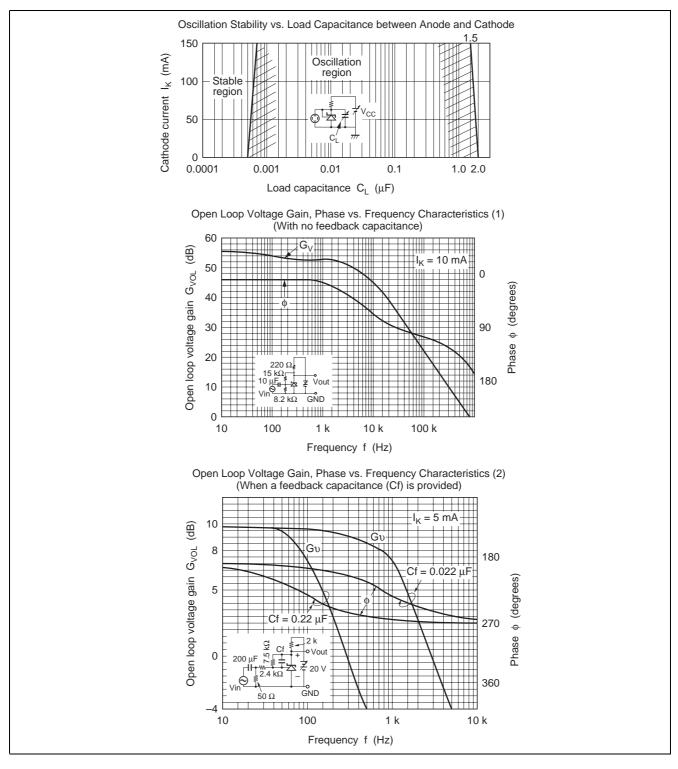



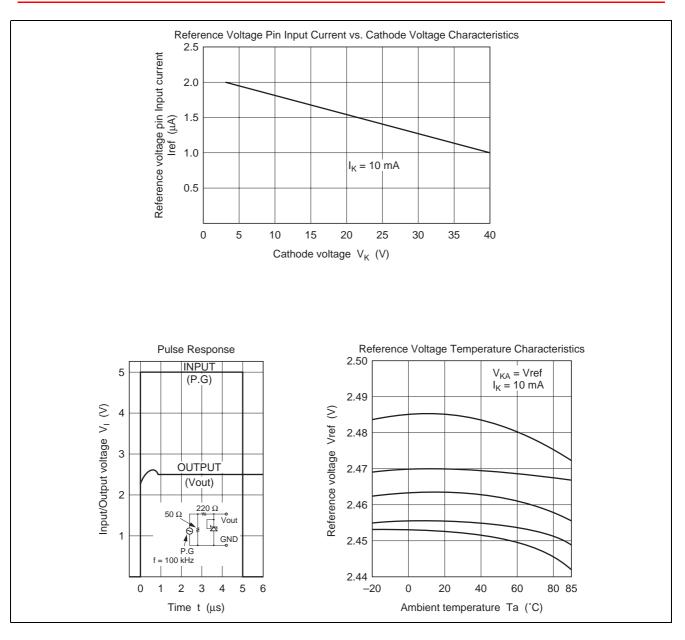



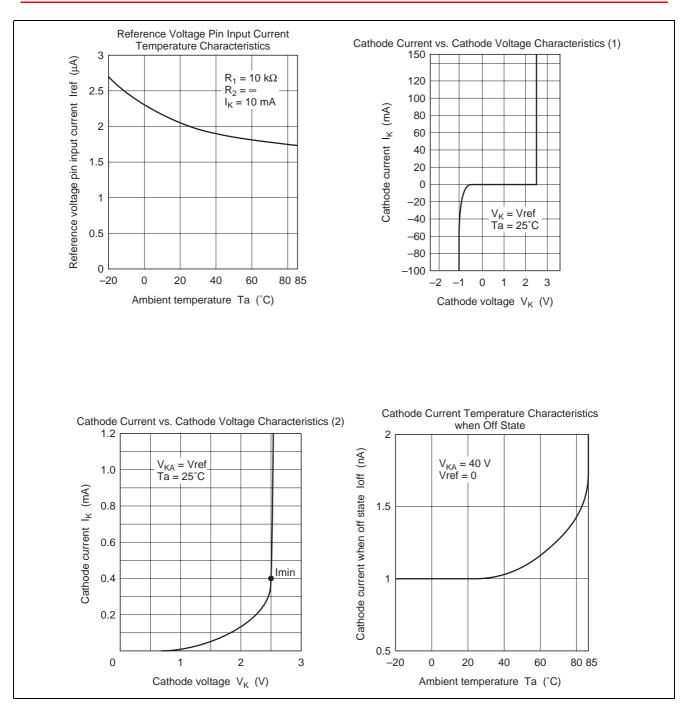



# **Application Examples**

As shown in the figure on the right, this IC operates as an inverting amplifier, with the REF pin as input pin. The openloop voltage gain is given by the reciprocal of "reference voltage deviation by cathode voltage change" in the electrical specifications, and is approximately 50 to 60 dB. The REF pin has a high input impedance, with an input current Iref of 3.8  $\mu$ A Typ (V version: Iref = 2  $\mu$ A Typ). The output impedance of the output pin K (cathode) is defined as dynamic impedance Z<sub>KA</sub>, and Z<sub>KA</sub> is low (0.2  $\Omega$ ) over a wide cathode current range. A (anode) is used at the minimum potential, such as ground.

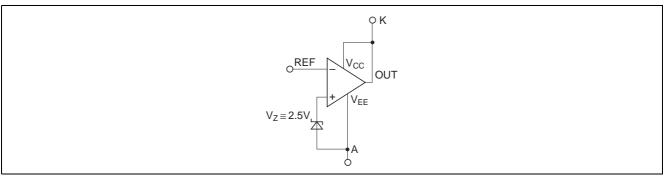


Figure 1 Operation Diagram

# **Application Hints**

No.	Application Example	Description
1	Reference voltage generation circuit Vin $O$ Vout R K CL GND $O$ GND	This is the simplest reference voltage circuit. The value of the resistance R is set so that cathode current $I_K \ge 1$ mA. Output is fixed at Vout $\cong 2.5$ V. The external capacitor $C_L$ ( $C_L \ge 3.3 \ \mu$ F) is used to prevent oscillation in normal applications.
2	Variable output shunt regulator circuit Vin $\bigcirc$	This is circuit 1 above with variable output provided. Here, Vout $\cong 2.5 \text{ V} \times \frac{(R_1 + R_2)}{R_2}$ Since the reference input current Iref = 3.8 µA Typ (V version: Iref = 2 µA Typ) flows through R <sub>1</sub> , resistance values are chosen to allow the resultant voltage drop to be ignored.



# Application Hints (cont.)

No.	Application Example	Description
3	Single power supply inverting comparator circuit $V_{CC}$ $R_L$ $V_{ID}$ $V_{ID}$ $V_{ID}$ K $V_{ID}$ K $V_{ID}$ K K $V_{ID}$ K K C K C C C C C C C C	$\label{eq:linear_state} \begin{array}{ c c c c } \hline This is an inverting type comparator with an input threshold voltage of approximately 2.5 V. Rin is the REF pin protection resistance, with a value of several k\Omega to several tens of k\Omega. \\ \hline R_L is the load resistance, selected so that the cathode current I_K \geq 1 \\ \hline mA when Vout is low. \\ \hline \hline C1 & Less then 2.5 V & V_{CC} (V_{OH}) & OFF \\ \hline \hline C2 & 2.5 V \mbox{ or more } Approx. 2 V (V_{OL}) & ON \\ \hline \end{array}$
4	AC amplifier circuit Cf $R_1$ Cin $R_3$ $R_2$ $R_2$ $R_2$ $R_1$ Vout $R_1$ Vout $R_1$ Vout $R_1$ Vout $R_1$ Vout $R_2$ O GND GND $Gain G = \frac{R_1}{R_2//R_3}$ (DC gain) Cutoff frequency fc = $\frac{1}{2\pi Cf} (R_1//R_2//R_3)$	This is an AC amplifier with voltage gain G = $-R_1 / (R_2//R_3)$ . The input is cut by capacitance Cin, so that the REF pin is driven by the AC input signal, centered on 2.5 V <sub>DC</sub> . R <sub>2</sub> also functions as a resistance that determines the DC cathode potential when there is no input, but if the input level is low and there is no risk of Vout clipping to V <sub>CC</sub> , this can be omitted. To change the frequency characteristic, Cf should be connected as indicated by the dotted line.
5	Switching power supply error amplification circuit	This circuit performs control on the secondary side of a transformer, and is often used with a switching power supply that employs a photocoupler for offlining. The output voltage (between V+ and V–) is given by the following formula: Vout $\cong 2.5 \text{ V} \times \frac{(R_1 + R_2)}{R_2}$ In this circuit, the gain with respect to the Vout error is as follows: $G = \frac{R_2}{(R_1 + R_2)} \times \begin{bmatrix} HA17431 \text{ open} \\ loop \text{ gain} \end{bmatrix} \times \begin{bmatrix} photocoupler \\ total \text{ gain} \end{bmatrix}$ As stated earlier, the HA17431 open-loop gain is 50 to 60 dB.



# Application Hints (cont.)

No.	Application Example	Description
6	Constant voltage regulator circuit $V_{CC} \circ R_1 \rightarrow Q$ $R_1 \rightarrow Q$ $R_2 \rightarrow Cf \rightarrow R_3$ $GND \circ O GND$	This is a 3-pin regulator with a discrete configuration, in which the output voltage Vout = $2.5 \text{ V} \times \frac{(R_2 + R_3)}{R_3}$ R <sub>1</sub> is a bias resistance for supplying the HA17431 cathode current and the output transistor Q base current.
7	Discharge type constant current circuit	This circuit supplies a constant current of $I_L \cong \frac{2.5 \text{ V}}{R_S}$ [A] into the load. Caution is required since the HA17431 cathode current is also superimposed on $I_L$ . The requirement in this circuit is that the cathode current must be greater than Imin = 1 mA. The $I_L$ setting therefore must be on the order of several mA or more.
8	Induction type constant current circuit $V_{CC}$ $R$ $Q$ $Q$ $Q$ $Q$ $Z.5$ $V$ $Rs$ $TTT$	In this circuit, the load is connected on the collector side of transistor Q in circuit 7 above. In this case, the load floats from GND, but the HA17431 cathode current is not superimposed on I <sub>L</sub> , so that I <sub>L</sub> can be kept small (1 mA or less is possible). The constant current value is the same as for circuit 7 above: $I_L \cong \frac{2.5 \text{ V}}{\text{R}_{\text{S}}}  [\text{A}]$



# Design Guide for AC-DC SMPS (Switching Mode Power Supply)

#### Use of Shunt Regulator in Transformer Secondary Side Control

This example is applicable to both forward transformers and flyback transformers. A shunt regulator is used on the secondary side as an error amplifier, and feedback to the primary side is provided via a photocoupler.

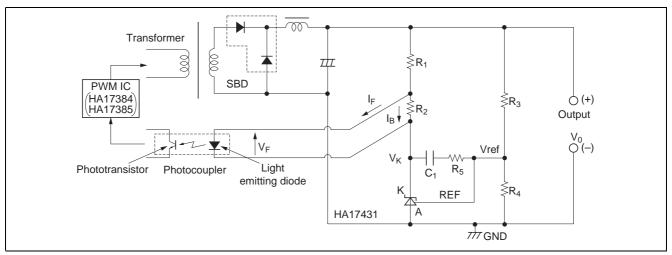


Figure 2 Typical Shunt Regulator/Error Amplifier

#### Determination of External Constants for the Shunt Regulator

**DC characteristic determination:** In figure 2,  $R_1$  and  $R_2$  are protection resistor for the light emitting diode in the photocoupler, and  $R_2$  is a bypass resistor to feed  $I_K$  minimum, and these are determined as shown below. The photocoupler specification should be obtained separately from the manufacturer. Using the parameters in figure 2, the following formulas are obtained:

$$R_1 = \frac{V_0 - V_F - V_K}{I_F + I_B}$$
,  $R_2 = \frac{V_F}{I_B}$ 

 $V_K$  is the HA17431 operating voltage, and is set at around 3 V, taking into account a margin for fluctuation.  $R_2$  is the current shunt resistance for the light emitting diode, in which a bias current  $I_B$  of around 1/5  $I_F$  flows.

Next, the output voltage can be determined by R3 and R4, and the following formula is obtained:

$$V_0 = \frac{R_3 + R_4}{R_4} \times \text{Vref, Vref} = 2.5 \text{ V Typ}$$

The absolute values of  $R_3$  and  $R_4$  are determined by the HA17431 reference input current Iref and the AC characteristics described in the next section. The Iref value is around 3.8  $\mu$ A Typ. (V version: 2  $\mu$ A Typ)

**AC characteristic determination:** This refers to the determination of the gain frequency characteristic of the shunt regulator as an error amplifier. Taking the configuration in figure 2, the error amplifier characteristic is as shown in figure 3.

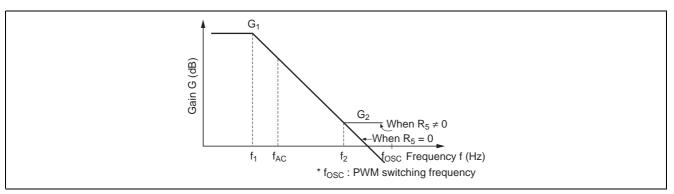


Figure 3 HA17431 Error Amplification Characteristic



In Figure 3, the following formulas are obtained:

Gain

 $G_1 = G_0 \approx 50 \text{ dB}$  to 60 dB (determined by shunt regulator)

$$G_2 = \frac{R_5}{R_3}$$

Corner frequencies

$$f_1 = 1/(2\pi C_1 G_0 R_3)$$
$$f_2 = 1/(2\pi C_1 R_5)$$

 $G_0$  is the shunt regulator open-loop gain; this is given by the reciprocal of the reference voltage fluctuation  $\Delta V ref / \Delta V_{KA}$ , and is approximately 50 dB.

## **Practical Example**

Consider the example of a photocoupler, with an internal light emitting diode  $V_F = 1.05$  V and  $I_F = 2.5$  mA, power supply output voltage  $V_2 = 5$  V, and bias resistance  $R_2$  current of approximately 1/5  $I_F$  at 0.5 mA. If the shunt regulator  $V_K = 3$  V, the following values are found.


$$R_{1} = \frac{5V - 1.05V - 3V}{2.5mA + 0.5mA} = 316(\Omega) (330\Omega \text{ from E24 series})$$
$$R_{2} = \frac{1.05V}{0.5mA} = 2.1(k\Omega) (2.2k\Omega \text{ from E24 series})$$


Next, assume that  $R_3 = R_4 = 10 \text{ k}\Omega$ . This gives a 5 V output. If  $R_5 = 3.3 \text{ k}\Omega$  and  $C_1 = 0.022 \mu\text{F}$ , the following values are found.

 $\begin{aligned} G_2 &= 3.3 \text{ k}\Omega / 10 \text{ k}\Omega = 0.33 \text{ times } (-10 \text{ dB}) \\ f_1 &= 1 / (2 \times \pi \times 0.022 \text{ }\mu\text{F} \times 316 \times 10 \text{ }k\Omega) = 2.3 \text{ (Hz)} \\ f_2 &= 1 / (2 \times \pi \times 0.022 \text{ }\mu\text{F} \times 3.3 \text{ }k\Omega) = 2.2 \text{ (kHz)} \end{aligned}$ 



# **Package Dimensions**

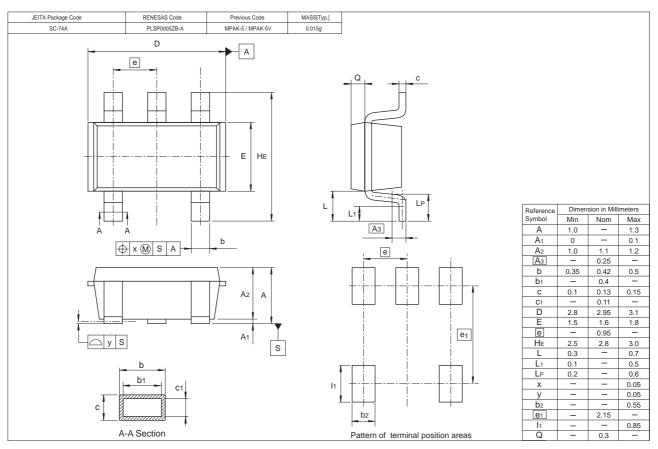


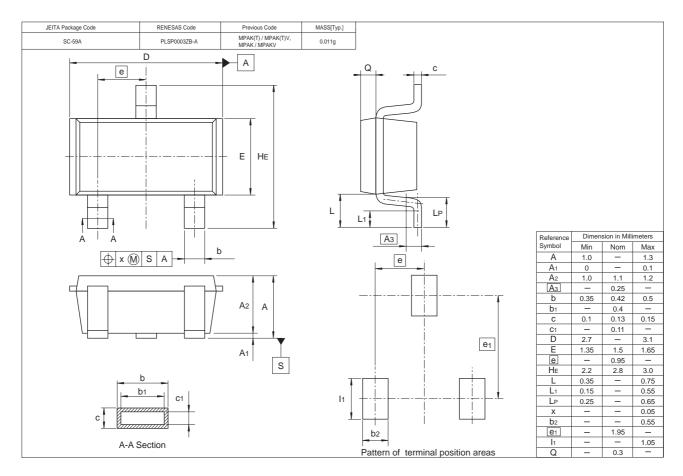



## HA17431 Series


$\begin{array}{c c c c c c c c c c c c c c c c c c c $	SC-62 PLZZ0004CA-A UPAK/UPAKV 0.050g Unit: m				
$4.5 \pm 0.1$ $1.5 \pm 0.1$	$\begin{array}{c c c c c c c c c c c c c c c c c c c $				Linit: m
	0.53  Max $0.48  Max$ $1.5, 1.5, 1.5, 1.5, 1.5, 1.5, 1.5, 1.5,$	PLZZ0004CA-A	UPAK / UPAKV		Unit: m
	$\begin{array}{c c} 0.48 \text{ Max} & 1 \\ \hline 0.48 \text{ Max} & 1 \\ \hline 1.5 + 1.5 \\ \hline 3.0 \\ \hline \end{array} \qquad \begin{array}{c c} \\ \hline \\ $			.5 ± 0.1	

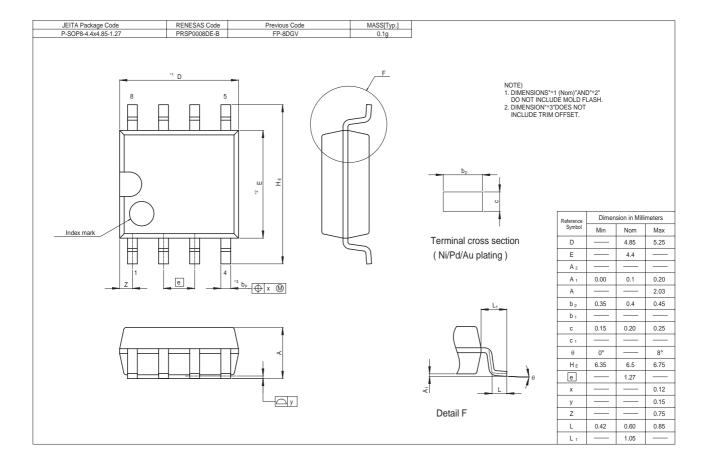



## HA17431 Series

				I Init: mm
JEITA Package Code SC-43A	Previous Code TO-92(1)/TO-92(1)V	Mass[Typ.] 0.25g 12.7 Min 5.0 ± 0.2	3.8 ± 0.3	Unit: mm
	<u>1.27</u> <u>2.54</u>	7		

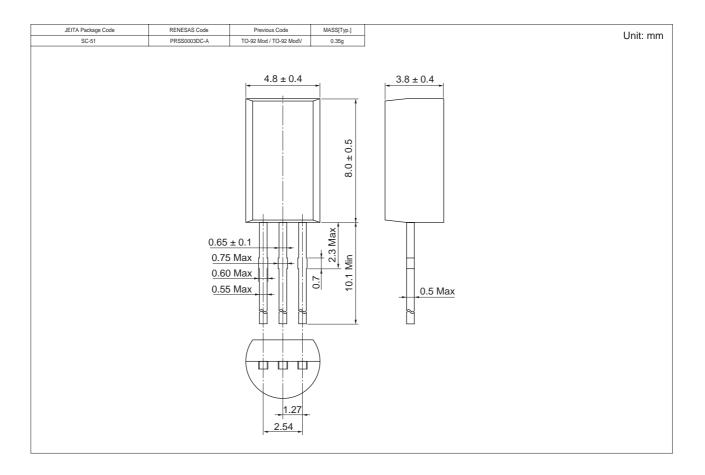



# Renesas Technology Corp. Sales Strategic Planning Div. Nippon Bldg., 2-6-2, Ohte-machi, Chiyoda-ku, Tokyo 100-0004, Japan

Keep safety first in your circuit designs! 1. Renesas Technology Corp. puts the maximum effort into making semiconductor products better and more reliable, but there is always the possibility that trouble may occur with them. Trouble with semiconductors may lead to personal injury, fire or property damage. Remember to give due consideration to safety when making your circuit designs, with appropriate measures such as (i) placement of substitutive, auxiliary circuits, (ii) use of nonflammable material or (iii) prevention against any malfunction or mishap.

#### Notes regarding these materials

- Notes regarding these materials
  These materials are intended as a reference to assist our customers in the selection of the Renesas Technology Corp. product best suited to the customer's application; they do not convey any license under any intellectual property rights, or any other rights, belonging to Renesas Technology Corp. or a third party.
  Renesas Technology Corp. assumes no responsibility for any damage, or infringement of any third-party's rights, originating in the use of any product data, diagrams, charts, programs, algorithms, or circuit application examples contained in these materials.
  All information contained in these materials, including product data, diagrams, charts, programs and algorithms represents information on products at the time of publication of these materials, and are subject to change by Renesas Technology Corp. without notice due to product improvements or other reasons. It is therefore recommended that customers contact Renesas Technology Corp. van a authorized Renesas Technology Corp. product distributor for the latest product information before purchasing a product listed herein.
  The information before purchasing a product listed herein.
  The information described here may contain technical inaccuracies or typographical errors.
  Renesas Technology Corp. assumes no responsibility for any damage, ilability, or other loss rising from these inaccuracies or errors.
  Please also pay attention to information published by Renesas Technology Corp. by various means, including the Renesas Technology Corp. Semiconductor home page (http://www.renesas.com).
  When using any or all of the information contained in these materials, including product data, diagrams, charts, programs, and algorithms, please be sure to evaluate all information actual system before making a final decision on the applicability of the information and products. Renesas Technology Corp. assumes no responsibility for any damage or manufactured f

- use. 6. The prior written approval of Renesas Technology Corp. is necessary to reprint or reproduce in whole or in part these materials. 7. If these products or technologies are subject to the Japanese export control restrictions, they must be exported under a license from the Japanese government and cannot be imported into a country other than the approved destination. Any diversion or reexport contrary to the export control laws and regulations of Japan and/or the country of destination is prohibited. 8. Please contact Renesas Technology Corp. for further details on these materials or the products contained therein.



#### **RENESAS SALES OFFICES**

Refer to "http://www.renesas.com/en/network" for the latest and detailed information.

Renesas Technology America, Inc. 450 Holger Way, San Jose, CA 95134-1368, U.S.A Tel: <1> (408) 382-7500, Fax: <1> (408) 382-7501

Renesas Technology Europe Limited Dukes Meadow, Millboard Road, Bourne End, Buckinghamshire, SL8 5FH, U.K. Tel: <44> (1628) 585-100, Fax: <44> (1628) 585-900

Renesas Technology Hong Kong Ltd. 7th Floor, North Tower, World Finance Centre, Harbour City, 1 Canton Road, Tsimshatsui, Kowloon, Hong Kong Tel: <852> 2265-6688, Fax: <852> 2730-6071

Renesas Technology Taiwan Co., Ltd. 10th Floor, No.99, Fushing North Road, Taipei, Taiwan Tel: <886> (2) 2715-2888, Fax: <886> (2) 2713-2999

Renesas Technology (Shanghai) Co., Ltd. Unit2607 Ruijing Building, No.205 Maoming Road (S), Shanghai 200020, China Tel: <86> (21) 6472-1001, Fax: <86> (21) 6415-2952

Renesas Technology Singapore Pte. Ltd. 1 Harbour Front Avenue, #06-10, Keppel Bay Tower, Singapore 098632 Tel: <65> 6213-0200, Fax: <65> 6278-8001

http://www.renesas.com

# **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Voltage References category:

Click to view products by Renesas manufacturer:

Other Similar products are found below :

622664A 636116E 748389C AS431ARTR-E1 NCP431BCSNT1G NCP432BCSNT1G NCV431BSNT1G AP4313UKTR-G1 TL1431AIYDT AZ431BR-ATRE1 622668D NCP432BVSNT1G 5962-8686103XC NCV431BVDMR2G AZ432BNTR-G1 AP4306BUKTR-G1 SC431BVSNT1G MAX6023EBT30+T NCV431ASNT1G LM4040CEM3-5.0/V+T LT1460KCS3-3#TRM LT1460KCS3-3.3#TRM LT6660KCDC-10#TRMPBF LTC6652BHLS8-5#PBF LTC6652AHLS8-4.096#PBF LTC6655BHLS8-4.096#PBF LT6660HCDC-5#TRMPBF LM336Z-2.5#PBF LT1021BMH-10 SC431ILPRAG TLVH431MIL3T MAX6023EBT21+T AP432AQG-7 ADR4540CRZ LM4040B25QFTA TS3325AQPR REF102AU/2K5 TL4050B25QDBZR TL4051C12QDCKR TL431ACZ KA431SLMF2TF KA431SMF2TF KA431SMFTF LM385BXZ/NOPB LM4040QCEM3-3.0/NOPB LM4041C12ILPR LM4050AEM3X-5.0/NOPB LM4050AIM3X-5.0/NOPB LM4120AIM5-2.5/NOP LM431SCCMFX