


Features


- 5 VDC Version Compatible to Operate Directly from TTL or DTL Circuits
- Internal Clamping Diode
- Flame Retardant Epoxy Package
- PC Mountable

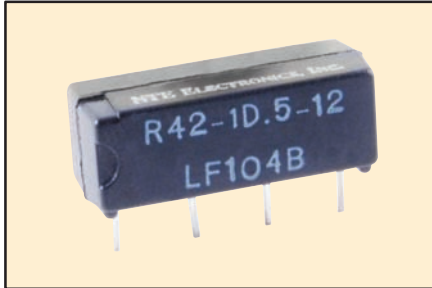

R42 Series

General Purpose, 500mA DC SPST-NO SIP Reed Relay.

D20

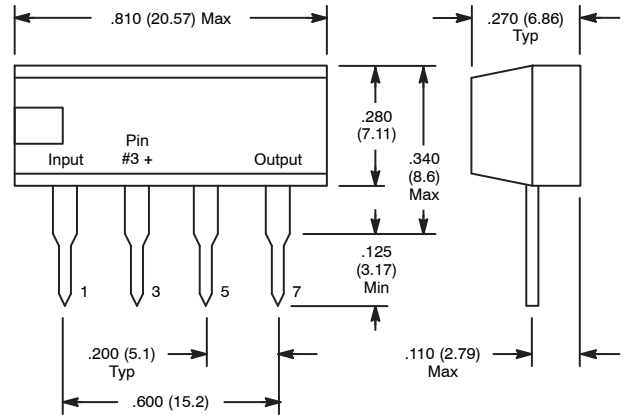

DC OPERATED								
NTE Type No.	Nom. Voltage	Contact Arr.	Coil Res. Ohms (Typ)	Nom. Pwr.	Max. Cont.	Max. Pick up	Min. Drop out	Diag No.
R42-1D .5-6	5/6 VDC	SPST-NO	500	50 mW	.5 Amp	3.8 VDC	0.5 VDC	D20
R42-1D .5-12	12 VDC	SPST-NO	850	77 mW	.5 Amp	9 VDC	1 VDC	D20
R42-1D .5-24	24 VDC	SPST-NO	2200	180 mW	.5 Amp	18 VDC	2 VDC	D20

Electrical Specifications

Contact

Rating: 0.5 Amp switching current max.
1.5 Amp carry current max.

Resistance: 200 milliohms max. initial

Coil

Coil Voltages: See Chart

Pick-up Voltage: See Chart

Drop-out Voltage: See Chart

Operational Characteristics

Timing Values **Operate Time:** 330 μ S at nominal voltage
Release Time: 150 μ S at nominal voltage

Insulation Characteristics

Dielectric Strength

Across Open Contacts: 200 VDC
Contact To Contact: 1000 VDC

Environmental Characteristics

Operating: -45°C to +85°C

Storage: -60°C to +105°C

Capacitance

Across Open Contacts: 1 pf

Open Contacts To Coil: 2 pf

Life

Mechanical: 5×10^6 (50,000,000) with appropriate contact protection

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Reed Relays](#) category:

Click to view products by [NTE](#) manufacturer:

Other Similar products are found below :

[CUPE001A624](#) [CUPE004A605](#) [8000-0217](#) [922A06C4C](#) [PRMA1A24B](#) [HGS1021](#) [HGS1048](#) [HGZM1C24](#) [HGZM2C05](#) [HGZM2C12](#)
[HGZM2C48](#) [134MPCX-3](#) [MSS62A05](#) [MSS71A05](#) [MSS71A05B](#) [MSS71A12](#) [MSS71A12B](#) [MSS71A24](#) [HYR2001-1520](#) [9000-0153](#) [2600-0308](#) [2653-12-310](#) [2610-12-310](#) [2611-05-310](#) [PRMA1B05B](#) [2653-05-310](#) [HGP1005](#) [HGS1019](#) [HGS2M5114](#) [HGZM1C05](#) [HGZM1C12](#)
[HGZM1C48](#) [3-1393771-5](#) [3432-12-91](#) [CUPV50020](#) [HYR2031-1520](#) [V23100V4305C11](#) [W107DIP-43](#) [W193RE1C3-12G](#) [W193RE2A3-12G](#)
[W193RE2C3-24G](#) [W193RE3A3-24G](#) [W193RE3C3-24G](#) [W193RE4C3-12G](#) [5000-0242](#) [W193RE4C3-24G](#) [W193RE4A3-24G](#) [W193RE4A3-12G](#) [W193RE2C3-12G](#) [W193RE2A3-24G](#)