

ISLAVSEVAL1Z

USB to AVSBus™ Adapter User Guide

UG089
Rev 0.00
August 22, 2016

The Intersil USB to AVSBus Adapter (often referred to as a “dongle”) is used to connect a demonstration board with a AVSBus interface to a PC. The USB to AVSBus adapter is powered from the USB output of the host PC. The USB interface utilizes the USB Mini format, and the output uses a standard 2 row, 6-pin header on 0.100 inch centers. The AVSBus command set is accessed by using the PowerNavigator™ evaluation software from a PC running Microsoft Windows. The PowerNavigator software is downloaded from the Intersil website using the following link: <http://www.intersil.com/powernavigator.html>

The USB to AVSBus adapter can be used to communicate with Intersil’s AVSBus enabled devices at clock rates from 5MHz to 50MHz and at VDDIO voltage levels from 1V to 3.3V. The VDDIO voltage is generated within the USB to AVSBus adapter. The USB to AVSBus adapter can also store up to 100 instructions for continuous multi-command testing purposes.

Ordering Information

PART NUMBER	DESCRIPTION
ISLAVSEVAL1Z	USB to AVSBus adapter and cable

USB to AVSBus Adapter Quick Start Guide

- Connect the USB Mini provided between the host computer and the USB to AVSBus adapter
- Connect USB to AVSBus adapter to demonstration board to test or evaluate
- Apply input power to the demonstration board
- Configure the demonstration board for AVSBus operation using the USB to PMBus adapter and PowerNavigator™
- Navigate to the AVSBus control page in PowerNavigator™ and evaluate the AVSBus functionality

Technical Details

A typical application set-up is shown in [Figure 1](#). For those wishing to make discrete connections to an application board, a pictorial diagram of the output pin signals is shown in [Figure 2](#). A schematic of the USB to AVSBus Adapter internal circuitry is provided in [Figure 3](#). The Bill Of Materials (BOM) is detailed on [page 3](#).

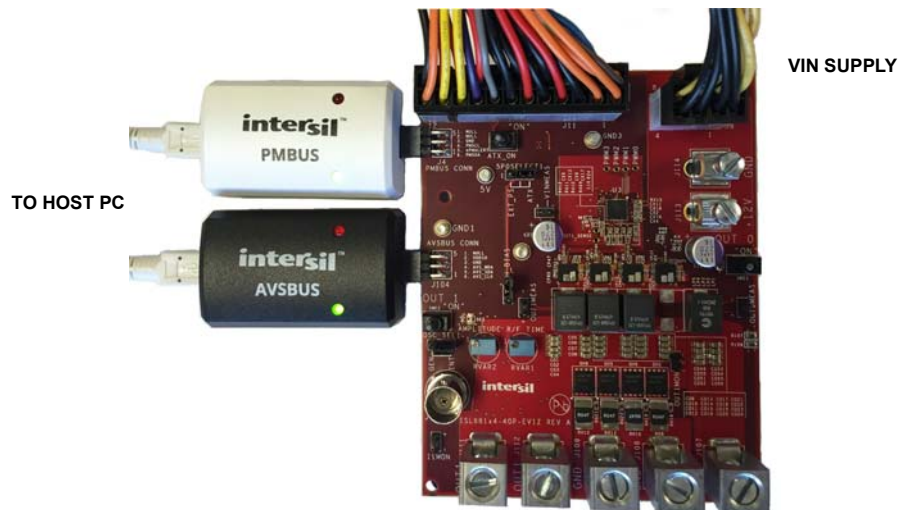


FIGURE 1. USB TO AVSBus TYPICAL SET-UP

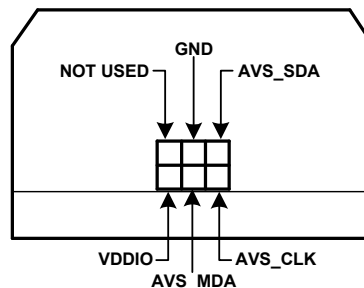


FIGURE 2. PIN CONFIGURATION DIAGRAM

ISLAVSEVAL1Z Schematic

USB, MCU, SPI, AVS CONNECTOR

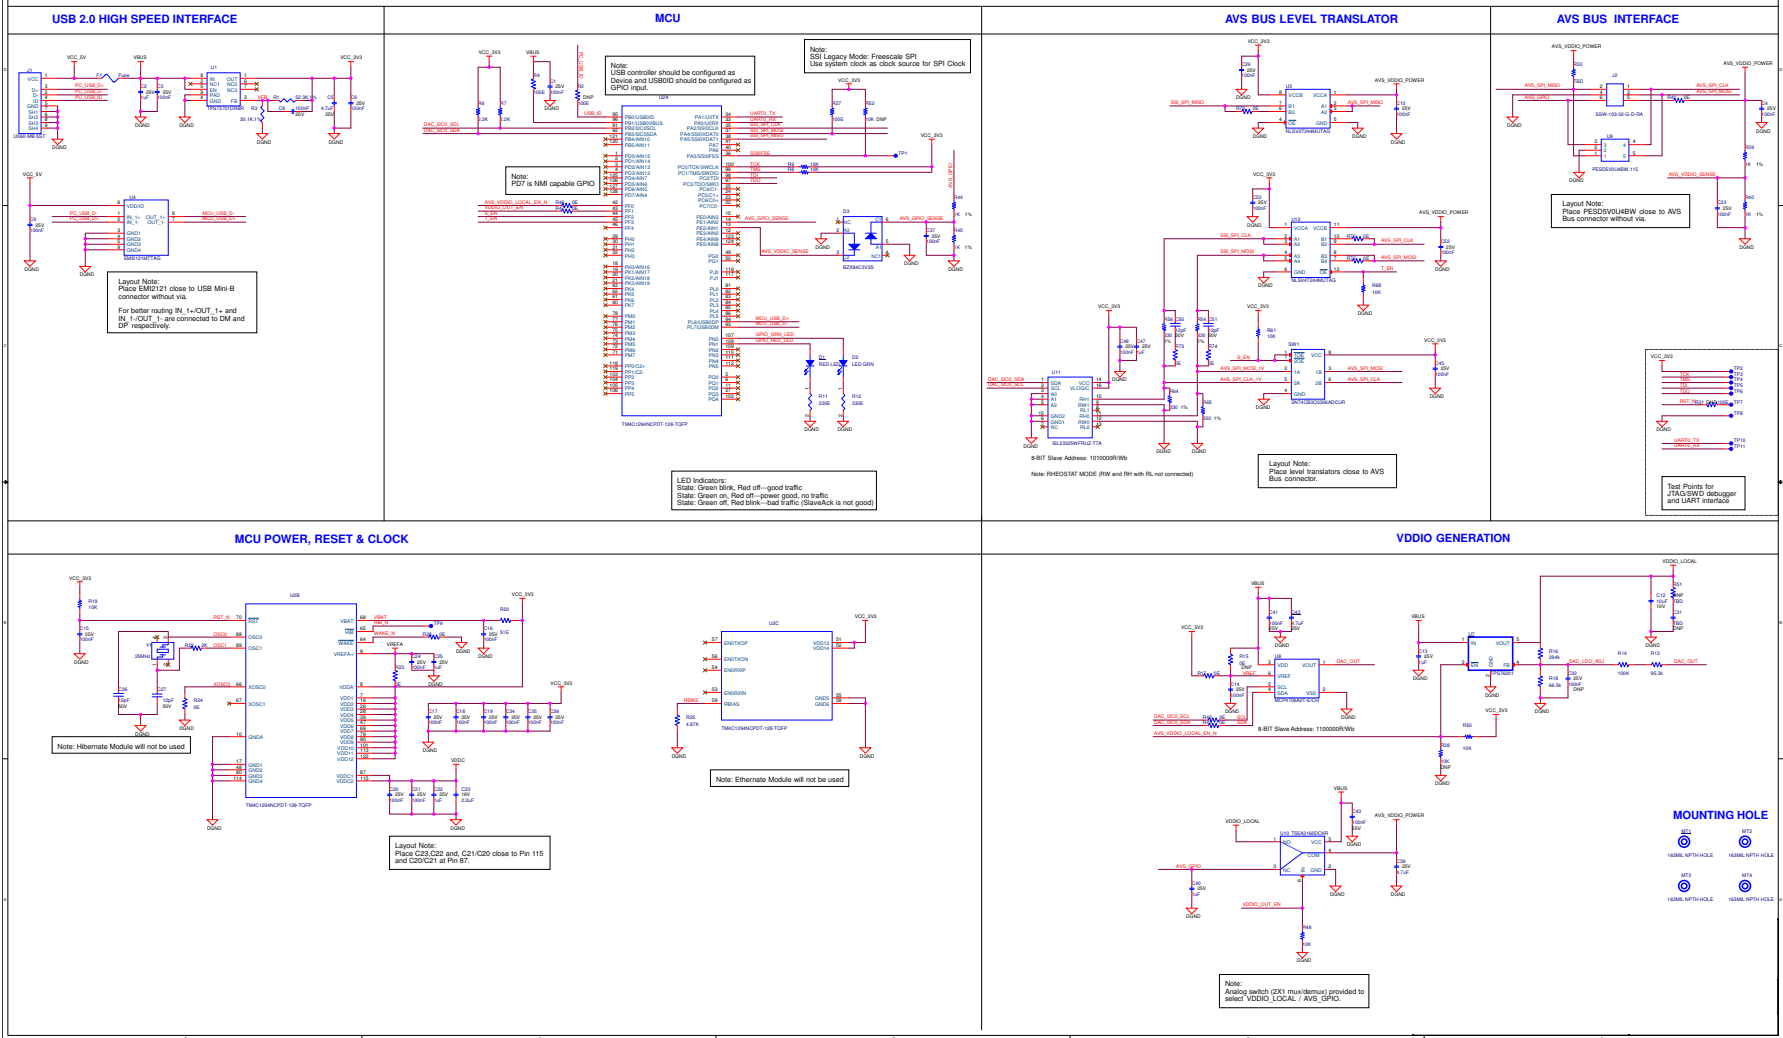


FIGURE 3. USB TO AVSBus ADAPTER SCHEMATIC

Bill of Materials

ITEM	QTY	REFERENCE	MANUFACTURER PART	VALUE	DESCRIPTION	PACKAGE	MANUFACTURER
1	28	C1, C3, C4, C6, C8, C9, C10, C14, C15, C16, C17, C18, C19, C20, C21, C24, C29, C33, C34, C35, C36, C37, C41, C43, C45, C48, C52, C53	C1005X5R1E104K050BC	100nF	CAP CER 0.1μF 25V 10% X5R 0402	402	TDK Corporation
2	6	C2, C13, C22, C25, C40, C47	GRM188R61E105KA12D	1μF	CAP CER 1μF 25V 10% X5R 0603	603	Murata
3	3	C5, C39, C42	CL10A475MA8NQNC	4.7μF	CAP CER 4.7μF 25V 20% X5R 0603	603	Samsung
4	1	C12	TPSA106K010R0900	10μF	CAP TANT 10μF 10V 10% 1206	1206	AVX Corporation
5	1	C23	CE EMK107 BJ225KA-T	2.2μF	CAP CER 2.2μF 16V 10% X5R 0603	603	Taiyo Yuden
6	4	C26, C27, C50, C51	CC0402JRNPO9BN120	12pF	CAP CER 12PF 50V 5% NPO 0402	RC0402	Yageo
7	1	C31	DNP	DNP	DNP	603	TDK Corporation
8	1	C32	C1005X5R1E104K050BC	100nF	CAP CER 0.1μF 25V 10% X5R 0402	402	TDK Corporation
9	1	D1	LTL-4221N	RED LED	LED 3mm HI-EFF RED DIFFUSED	Round with Domed Top, 3mm	Lite-On Inc.
10	1	D2	LTL-4231N	LED GRN	LED 3mm GREEN DIFFUSED	Round with Domed Top, 3mm	Lite-On Inc.
11	1	D3	BZX84C3V3S-7-F	BZX84C3V3S	DIODE ZENER ARRAY 3.3V SOT363	SOT-363	Diodes Incorporated
12	1	F1	0603L100SLYR	Fuse	PTC RESETTBLE 6V 1.0A LOW-R 0603	603	Littelfuse Inc.
13	1	J1	UX60-MB-5ST	UX60-MB-5ST	CONN RECEPT MINI USB2.0 5POS	SMT	Hirose
14	1	J2	SSW-103-02-G-D-RA	SSW-103-02-G-D-RA	CONN RCPT 0.100" 6POS DL R/A GOLD	Through-hole	Samtec Inc.
15	4	MT1, MT2, MT3, MT4	NA	163MIL NPTH HOLE		163 MOUNTING HOLE - 250 CLEARANCE	NA

Bill of Materials

ITEM	QTY	REFERENCE	MANUFACTURER PART	VALUE	DESCRIPTION	PACKAGE	MANUFACTURER
16	1	R1	RC1005F5232CS	52.3k, 1%	RES SMD 52.3kΩ 1% 1/16W 0402		Samsung Electro-Mechanics America, Inc.
17	2	R2, R31	ERJ-2RKF1000X	100Ω	RES 100Ω 1/10W 1% 0402 SMD	402	Panasonic
18	1	R3	RC1005F3012CS	30.1k, 1%	RES SMD 30.1kΩ 1% 1/16W 0402		Samsung Electro-Mechanics America, Inc.
19	2	R4, R27	ERJ-2RKF1000X	100Ω	RES 100Ω 1/10W 1% 0402 SMD	402	Panasonic
20	2	R6, R7	RC0402JR-072K2L	2.2k	RES 2.2kΩ 1/16W 5% 0402 SMD	402	Yageo
21	7	R8, R9, R19, R48, R50, R61, R68	ERJ-2RKF1002X	10k	RES 10.0kΩ 1/10W 1% 0402 SMD	402	Panasonic - ECG
22	6	R11, R12, R54, R56, R64, R65	MCR01MZPF3300	330Ω	RES 330Ω 1/16W 1% 0402 SMD	402	Rohm Semiconductor
23	1	R13	ERJ-2RKF9532X	95.3k	RES SMD 95.3kΩ 1% 1/10W 0402	402	Panasonic Electronic Components
24	1	R14	ERJ-2RKF1003X	100k	RES 100kΩ 1/10W 1% 0402 SMD	402	Panasonic
25	1	R15	ERJ-2GE0R00X	0E	RES 0.0Ω 1/10W 0402 SMD	402	Panasonic
26	1	R16	RC1608F2943CS	294k	RES SMD 294kΩ 1% 1/10W 0603	402	Samsung Electro-Mechanics America, Inc
27	14	R17, R23, R24, R28, R41, R42, R43, R46, R47, R70, R72, R73, R74, R75	ERJ-2GE0R00X	0E	RES 0.0Ω 1/10W 0402 SMD	402	Panasonic
28	1	R18	RC1005F6652CS	66.5k	RES SMD 66.5kΩ 1% 1/16W 0402	402	Samsung Electro-Mechanics America, Inc
29	1	R20	RC1005J510CS	51Ω	RES SMD 51Ω 5% 1/16W 0402	402	Samsung Electro-Mechanics America, Inc
30	1	R22	RC1005F202CS	2k	RES SMD 2kΩ 1% 1/16W 0402	402	Samsung Electro-Mechanics America, Inc
31	1	R25	RC1005F4871CS	4.87k	RES SMD 4.87kΩ 1% 1/16W 0402	402	Samsung Electro-Mechanics America, Inc
32	2	R38, R52	ERJ-2RKF1002X	10k	RES 10.0kΩ 1/10W 1% 0402 SMD	402	Panasonic - ECG

Bill of Materials

ITEM	QTY	REFERENCE	MANUFACTURER PART	VALUE	DESCRIPTION	PACKAGE	MANUFACTURER
33	4	R39, R40, R44, R45	ERJ-2RKF1001X	1k	RES 1kΩ 1/10W 1% 0402 SMD	402	Panasonic
34	1	R51	DNP	DNP	DNP	603	DNP
35	1	R53	DNP	DNP	DNP	402	DNP
36	1	SW1	SN74CB3Q3306ADCUR	SN74CB3Q3306ADCUR	IC FET BUS SWITCH DUAL US8	US8	Texas Instruments
37	11	TP1, TP2, TP3, TP4, TP5, TP6, TP7, TP8, TP9, TP10, TP11	DNP	Test Point	TEST PAD TP-S40	-NA-	-NA-
38	1	U1	TPS73701DRBR	TPS73701DRBR	IC REG LDO ADJ 1A 8SON	8-SON	Texas Instruments
39	1	U2	TM4C1294NCPDTI3	TM4C1294NCPDT-128-TQFP	IC MCU 32BIT 1024KB FLASH 128TQF	128-pin TQFP	Texas Instruments
40	1	U4	EMI2121MTTAG	EMI2121MTTAG	IC FILTER COMMON-MODE ESD 8WDFN	WDFN8	ON Semiconductor
41	1	U5	NLSV2T244MUTAG	NLSV2T244MUTAG	IC XLATOR 2BIT NONINV DUAL 8UDFN	8-UDFN	ON Semiconductor
42	1	U7	TPS76201DBVT	TPS76201	IC REG LDO ADJ 0.1A SOT23-5	SOT-23-5	Texas Instruments
43	1	U8	MCP4706A0T-E/CH	MCP4706A0T-E/CH	IC DAC 8BIT NV EEP I2C SOT23-6	SOT-23-6	Microchip
44	1	U9	PESD5V0U4BW, 115	PESD5V0U4BW, 115	DIODE ARRAY ESD BI-DIR SOT-665	SOT-665	NXP Semiconductor
45	1	U10	TS5A3160DCKR	TS5A3160DCKR	IC SWITCH SPDT SC70-6	SC70	Texas Instruments
46	1	U11	ISL23325WFRUZ-T7A	ISL23325WFRUZ-T7A	IC DGTL POT DUAL 10k 16UTQFN	16-UFQFN	Intersil
47	1	U12	NLSV4T244MUTAG	NLSV4T244MUTAG	IC XLATOR 4BIT DUAL 12-UQFN	12-UQFN	ON Semiconductor
48	1	Y1	NX3225GA-25.000M-STD-CRG-2	25MHz	CRYSTAL 25.0000MHZ 8PF SMD	3.20mmx2.50mm	NDK

Notice

1. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation or any other use of the circuits, software, and information in the design of your product or system. Renesas Electronics disclaims any and all liability for any losses and damages incurred by you or third parties arising from the use of these circuits, software, or information.
2. Renesas Electronics hereby expressly disclaims any warranties against and liability for infringement or any other claims involving patents, copyrights, or other intellectual property rights of third parties, by or arising from the use of Renesas Electronics products or technical information described in this document, including but not limited to, the product data, drawings, charts, programs, algorithms, and application examples.
3. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
4. You shall not alter, modify, copy, or reverse engineer any Renesas Electronics product, whether in whole or in part. Renesas Electronics disclaims any and all liability for any losses or damages incurred by you or third parties arising from such alteration, modification, copying or reverse engineering.
5. Renesas Electronics products are classified according to the following two quality grades: "Standard" and "High Quality". The intended applications for each Renesas Electronics product depends on the product's quality grade, as indicated below.
"Standard": Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; industrial robots; etc.
"High Quality": Transportation equipment (automobiles, trains, ships, etc.); traffic control (traffic lights); large-scale communication equipment; key financial terminal systems; safety control equipment; etc.
Unless expressly designated as a high reliability product or a product for harsh environments in a Renesas Electronics data sheet or other Renesas Electronics document, Renesas Electronics products are not intended or authorized for use in products or systems that may pose a direct threat to human life or bodily injury (artificial life support devices or systems; surgical implantations; etc.), or may cause serious property damage (space system; undersea repeaters; nuclear power control systems; aircraft control systems; key plant systems; military equipment; etc.). Renesas Electronics disclaims any and all liability for any damages or losses incurred by you or any third parties arising from the use of any Renesas Electronics product that is inconsistent with any Renesas Electronics data sheet, user's manual or other Renesas Electronics document.
6. When using Renesas Electronics products, refer to the latest product information (data sheets, user's manuals, application notes, "General Notes for Handling and Using Semiconductor Devices" in the reliability handbook, etc.), and ensure that usage conditions are within the ranges specified by Renesas Electronics with respect to maximum ratings, operating power supply voltage range, heat dissipation characteristics, installation, etc. Renesas Electronics disclaims any and all liability for any malfunctions, failure or accident arising out of the use of Renesas Electronics products outside of such specified ranges.
7. Although Renesas Electronics endeavors to improve the quality and reliability of Renesas Electronics products, semiconductor products have specific characteristics, such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Unless designated as a high reliability product or a product for harsh environments in a Renesas Electronics data sheet or other Renesas Electronics document, Renesas Electronics products are not subject to radiation resistance design. You are responsible for implementing safety measures to guard against the possibility of bodily injury, injury or damage caused by fire, and/or danger to the public in the event of a failure or malfunction of Renesas Electronics products, such as safety design for hardware and software, including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult and impractical, you are responsible for evaluating the safety of the final products or systems manufactured by you.
8. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. You are responsible for carefully and sufficiently investigating applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive, and using Renesas Electronics products in compliance with all these applicable laws and regulations. Renesas Electronics disclaims any and all liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
9. Renesas Electronics products and technologies shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations. You shall comply with any applicable export control laws and regulations promulgated and administered by the governments of any countries asserting jurisdiction over the parties or transactions.
10. It is the responsibility of the buyer or distributor of Renesas Electronics products, or any other party who distributes, disposes of, or otherwise sells or transfers the product to a third party, to notify such third party in advance of the contents and conditions set forth in this document.
11. This document shall not be reprinted, reproduced or duplicated in any form, in whole or in part, without prior written consent of Renesas Electronics.
12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products.
(Note 1) "Renesas Electronics" as used in this document means Renesas Electronics Corporation and also includes its directly or indirectly controlled subsidiaries.
(Note 2) "Renesas Electronics product(s)" means any product developed or manufactured by or for Renesas Electronics.

(Rev.4.0-1 November 2017)



SALES OFFICES

Renesas Electronics Corporation

<http://www.renesas.com>

Refer to "<http://www.renesas.com/>" for the latest and detailed information.

Renesas Electronics America Inc.
1001 Murphy Ranch Road, Milpitas, CA 95035, U.S.A.
Tel: +1-408-432-8888, Fax: +1-408-434-5351

Renesas Electronics Canada Limited
9251 Yonge Street, Suite 8309 Richmond Hill, Ontario Canada L4C 9T3
Tel: +1-905-237-2004

Renesas Electronics Europe Limited
Dukes Meadow, Millboard Road, Bourne End, Buckinghamshire, SL8 5FH, U.K.
Tel: +44-1628-651-700, Fax: +44-1628-651-804

Renesas Electronics Europe GmbH
Arcadiastrasse 10, 40472 Düsseldorf, Germany
Tel: +49-211-6503-0, Fax: +49-211-6503-1327

Renesas Electronics (China) Co., Ltd.
Room 1709 Quantum Plaza, No.27 ZhichunLu, Haidian District, Beijing, 100191 P. R. China
Tel: +86-10-8235-1155, Fax: +86-10-8235-7679

Renesas Electronics (Shanghai) Co., Ltd.
Unit 301, Tower A, Central Towers, 555 Langao Road, Putuo District, Shanghai, 200333 P. R. China
Tel: +86-21-2226-0888, Fax: +86-21-2226-0999

Renesas Electronics Hong Kong Limited
Unit 1601-1611, 16/F., Tower 2, Grand Century Place, 193 Prince Edward Road West, Mongkok, Kowloon, Hong Kong
Tel: +852-2265-6688, Fax: +852-2886-9022

Renesas Electronics Taiwan Co., Ltd.
13F, No. 363, Fu Shing North Road, Taipei 10543, Taiwan
Tel: +886-2-8175-9600, Fax: +886-2-8175-9670

Renesas Electronics Singapore Pte. Ltd.
80 Bendemeer Road, Unit #06-02 Hyflux Innovation Centre, Singapore 339949
Tel: +65-6213-0200, Fax: +65-6213-0300

Renesas Electronics Malaysia Sdn.Bhd.
Unit 1207, Block B, Menara Amcorp, Amcorp Trade Centre, No. 18, Jln Persiaran Barat, 46050 Petaling Jaya, Selangor Darul Ehsan, Malaysia
Tel: +60-3-7955-9390, Fax: +60-3-7955-9510

Renesas Electronics India Pvt. Ltd.
No.777C, 100 Feet Road, HAL 2nd Stage, Indiranagar, Bangalore 560 038, India
Tel: +91-80-67208700, Fax: +91-80-67208777

Renesas Electronics Korea Co., Ltd.
17F, KAMCO Yangjae Tower, 262, Gangnam-daero, Gangnam-gu, Seoul, 06265 Korea
Tel: +82-2-558-3737, Fax: +82-2-558-5338

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Interface Development Tools](#) category:

Click to view products by [Renesas](#) manufacturer:

Other Similar products are found below :

[CY4607M](#) [XR17V358/SP339-E8-EB](#) [TW-DONGLE-USB](#) [XR21B1424IV64-0A-EVB](#) [P0551](#) [5346](#) [SI32185ACB10SL1KIT](#)
[RAA2S4252EXT](#) [4901](#) [DFR0979](#) [LIME2-SHIELD](#) [EM01-D](#) [USB TO TTL](#) [USB TO RS485](#) [USB-CAN-A](#) [MIKROE-5492](#)
[RTKH4Z2501S00000BE](#) [5956](#) [5964](#) [103030295](#) [MIKROE-2335](#) [KIT_MINIWIGGLER_3_USB](#) [KITXMC4XCOMETH001TOBO1](#)
[SI871XSOIC8-KIT](#) [1764](#) [1833](#) [1862](#) [ZSC31010KITV2.1](#) [EVB-USB82514](#) [ATAB663231A-V1.2](#) [ATAB663254A-V1.2](#) [2264](#)
[MCP23X17EV](#) [PS09-EVA-KIT](#) [MAX96708COAXEVKIT#](#) [MAXPOWERTOOL002#](#) [SMA2RJ45EVK/NOPB](#) [FR12-0002](#) [MAFR-000667-](#)
[000001](#) [MAFR-000589-000001](#) [MAFR-000553-000001](#) [BOB-13263](#) [BP359C](#) [ORG4572-R01-UAR](#) [XR21B1422IL40-0A-EVB](#)
[XR21B1420IL28-0A-EVB](#) [284](#) [SKYFR-000743](#) [SKYFR-000827](#) [SKYFR-000982](#)