

### FEATURES

- High electrical noise immunity
- High switching capacity in a compact package
- High sensitivity: 200 mW (1a), 400 mW (1c)
- High surge voltage: 8,000 V between contacts and coil
- UL, CSA, VDE, TÜV, SEMKO approved
- Class B coil insulation type available

### About Cd-free contacts

We have introduced cadmium-free type products to reduce environmentally hazardous substances. Please replace parts that contain cadmium with Cd-free products. Evaluate them with your actual application before use because the life of a relay depends on the contact material and load.

## SPECIFICATIONS

### Contact

			Standard type	High capacity type	
Arrangement				1 Form A, 1 Form C	
Initial contact resistance, max. (By voltage drop 6 V DC 1 A)				100 mΩ	
Contact material				AgSnO <sub>2</sub> type	
Rating (resistive)	Nominal switching capacity	1a	5 A 125 V AC, 2 A 250 V AC, 5 A 30 V DC	10 A 125 V AC, 5 A 250 V AC, 5 A 30 V DC	
		1c N.O. N.C.	5 A 125 V AC, 2 A 250 V AC, 3 A 30 V AC 2 A 125 V AC, 1 A 250 V AC, 1 A 30 V DC	10 A 125 V AC, 5 A 250 V AC, 5 A 30 V DC 3 A 125 V AC, 2 A 250 V AC, 1 A 30 V DC	
Max. switching power		1a	625 VA, 150 W	1,250 VA, 150 W	
		1c N.O. N.C.	625 VA, 90 W 250 VA, 30 W	1,250 V AC, 150 W 500 V AC, 30 W	
Max. switching voltage			250 V AC, 110 V DC (0.3A)		
Max. switching current			N.O.: 5 A N.C.: 2 A	N.O.: 10 A N.C.: 3 A	
Min. switching capacity <sup>#1</sup>			100 mA, 5 V DC		
Expected mechanical life (at 180 cpm)(min. operations)			10 <sup>7</sup>		

### Expected electrical life (min. operations)

Type			Switching capacity	No. of operations
Standard type	1a		5 A 125 V AC 3 A 125 V AC 2 A 250 V AC 5 A 30 V DC	5×10 <sup>4</sup> 2×10 <sup>5</sup> 2×10 <sup>5</sup> 10 <sup>5</sup>
		N.O.	5 A 125 V AC 2 A 250 V AC 3 A 30 V DC	5×10 <sup>4</sup> 2×10 <sup>5</sup> 10 <sup>5</sup>
		N.C.	2 A 125 V AC 1 A 250 V AC 1 A 30 V DC	2×10 <sup>5</sup> 2×10 <sup>5</sup> 10 <sup>5</sup>
			10 A 125 V AC 5 A 250 V AC 5 A 30 V DC	5×10 <sup>4</sup> 5×10 <sup>4</sup> 10 <sup>5</sup>
	1c	N.O.	10 A 125 V AC 5 A 250 V AC 5 A 30 V DC	5×10 <sup>4</sup> 5×10 <sup>4</sup> 10 <sup>5</sup>
		N.C.	3 A 125 V AC 2 A 250 V AC 1 A 30 V DC	2×10 <sup>5</sup> 2×10 <sup>5</sup> 10 <sup>5</sup>
High capacity type	1a		10 A 125 V AC 5 A 250 V AC 5 A 30 V DC	5×10 <sup>4</sup> 5×10 <sup>4</sup> 10 <sup>5</sup>
		N.O.	10 A 125 V AC 5 A 250 V AC 5 A 30 V DC	5×10 <sup>4</sup> 5×10 <sup>4</sup> 10 <sup>5</sup>
	1c	N.O.	3 A 125 V AC 2 A 250 V AC 1 A 30 V DC	2×10 <sup>5</sup> 2×10 <sup>5</sup> 10 <sup>5</sup>
		N.C.	3 A 125 V AC 2 A 250 V AC 1 A 30 V DC	2×10 <sup>5</sup> 2×10 <sup>5</sup> 10 <sup>5</sup>

### Coil (at 20°C 68°F)

Nominal operating power	1a: 200 mW	1c: 400 mW
-------------------------	------------	------------

#1 This value can change due to the switching frequency, environmental conditions, and desired reliability level, therefore it is recommended to check this with the actual load.

# JQ

## Characteristics

Max. operating speed		20 cpm
Initial insulation resistance <sup>*1</sup>		Min. 1,000 MΩ at 500 V DC
Initial breakdown voltage <sup>*2</sup>	Between open contacts	1a: 1,000 Vrms for 1 min. 1c: 750 Vrms for 1 min.
	Between contacts and coil	4,000 Vrms for 1 min.
Surge voltage between contact and coil <sup>*3</sup>		8,000 V
Operate time <sup>*4</sup> (at nominal voltage)		Max. 20 ms
Release time <sup>*4</sup> (at nominal voltage)(without diode)		Max. 10 ms
Temperature rise <sup>*5</sup>		Max. 45°C
Shock resistance	Functional <sup>*6</sup>	Min. 294 m/s <sup>2</sup> {30 G}
	Destructive <sup>*7</sup>	Min. 980 m/s <sup>2</sup> {100 G}
Vibration resistance	Functional <sup>*8</sup>	98 m/s <sup>2</sup> {10 G}, 10 to 55 Hz at double amplitude of 1.6 mm
	Destructive	117.6 m/s <sup>2</sup> {12 G}, 10 to 55 Hz at double amplitude of 2.0 mm
Conditions for operation, transport and storage <sup>*9</sup> (Not freezing and condensing at low temperature)	Ambient temp. <sup>*10</sup>	-40°C to +85°C -40°F to +185°F
	Humidity	5 to 85% R.H.
Unit weight		Approx. 7 g .25 oz

## Remarks

\* Specifications will vary with foreign standards certification ratings.

\*1 Measurement at same location as "Initial breakdown voltage" section

\*2 Detection current: 10 mA

\*3 Wave is standard shock voltage of  $\pm 1.2 \times 50\mu s$  according to JEC-212-1981

\*4 Excluding contact bounce time

\*5 Measured conditions

Standard type	Resistive, nominal voltage applied to the coil. Contact carrying current: 5 A, at 70°C 158°F
High capacity type	Resistive, nominal voltage applied to the coil. Contact carrying current: 10 A, at 70°C 158°F

\*6 Half-wave pulse of sine wave: 11ms; detection time: 10μs

\*7 Half-wave pulse of sine wave: 6ms

\*8 Detection time: 10μs

\*9 Refer to "6. Usage, Storage and Transport Conditions" in [AMBIENT ENVIRONMENT](#) section in Relay Technical Information.

\*10 When using relays in a high ambient temperature, consider the pick-up voltage rise due to the high temperature (a rise of approx. 0.4% V for each 1°C 33.8°F with 20°C 68°F as a reference) and use a coil impressed voltage that is within the maximum allowable voltage range.

## TYPICAL APPLICATIONS

- Air conditioners
- Refrigerators
- Microwave ovens
- Heaters

## ORDERING INFORMATION

Ex. JQ [1a] [P] — [B] — [12] V — [F]

Contact arrangement	Contact capacity	Coil insulation class	Coil voltage (DC)	Contact material
1a: 1 Form A 1: 1 Form C	Nil: Standard P: High capacity	Nil: Class E coil insulation B: Class B coil insulation	5, 6, 9, 12, 18, 24, 48* V	F: AgSnO <sub>2</sub> type

UL/CSA, VDE, SEMKO approved type is standard.

\* Available only for 1 Form C type

## TYPES AND COIL DATA at 20°C 68°F

	Part No.	Nominal voltage, V DC	Pick-up voltage, V DC (min.)	Drop-out voltage, V DC (min.)	Nominal operating current, mA	Nominal operating power, mW	Coil resistance, Ω (±10%)	Max. allowable voltage, V DC
1 Form A	JQ1a-5V-F	5	3.75	0.25	40	200	125	180% of nominal voltage (at 20°C 68°F)
	JQ1a-6V-F	6	4.5	0.3	33.3		180	
	JQ1a-9V-F	9	6.75	0.45	22.2		405	
	JQ1a-12V-F	12	9	0.6	16.7		720	
	JQ1a-18V-F	18	13.5	0.9	11.1		1,620	
	JQ1a-24V-F	24	18	1.2	8.3		2,880	
	JQ1aP-5V-F	5	4	0.25	40	200	125	130% of nominal voltage (at 85°C 185°F)
	JQ1aP-6V-F	6	4.8	0.3	33.3		180	
	JQ1aP-9V-F	9	7.2	0.45	22.2		405	
	JQ1aP-12V-F	12	9.6	0.6	16.7		720	
	JQ1aP-18V-F	18	14.4	0.9	11.1		1,620	
	JQ1aP-24V-F	24	19.2	1.2	8.3		2,880	
1 Form C	JQ1-5V-F	5	3.75	0.25	80	400	62.5	150% of nominal voltage (at 20°C 68°F)
	JQ1-6V-F	6	4.5	0.3	66.7		90	
	JQ1-9V-F	9	6.75	0.45	44.4		202.5	
	JQ1-12V-F	12	9	0.6	33.3		360	
	JQ1-18V-F	18	13.5	0.9	22.2		810	
	JQ1-24V-F	24	18	1.2	16.7		1,440	
	JQ1-48V-F	48	36	2.4	8.3	400	5,760	110% of nominal voltage (at 85°C 185°F)
	JQ1P-5V-F	5	4	0.25	80		62.5	
	JQ1P-6V-F	6	4.8	0.3	66.7		90	
	JQ1P-9V-F	9	7.2	0.45	44.4		202.5	
	JQ1P-12V-F	12	9.6	0.6	33.3		360	
	JQ1P-18V-F	18	14.4	0.9	22.2		810	
	JQ1P-24V-F	24	19.2	1.2	16.7		1,440	
	JQ1P-48V-F	48	38.4	2.4	8.3		5,760	


## DIMENSIONS (mm inch)

Download [CAD Data](#) from our Web site.


### CAD Data



1 Form A

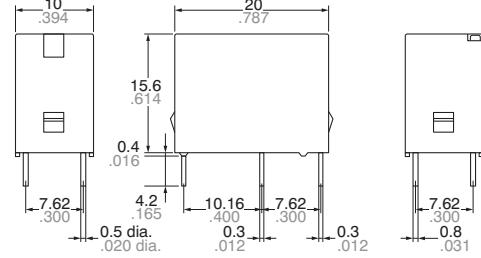

1 Form C

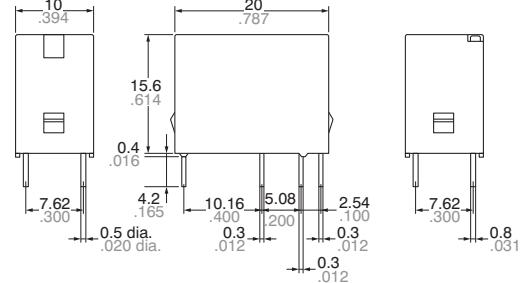

Dimension :

Max. 1mm .039 inch

1 to 5mm .039 to .118 inch

Min. 5mm .118 inch

General tolerance


±0.2 ±.008

±0.3 ±.012


±0.4 ±.016

Schematic (Bottom view)

1 Form A




1 Form C




PC board pattern (Bottom view)

1 Form A

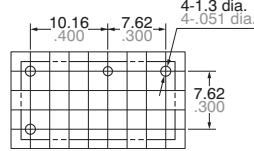


1 Form C

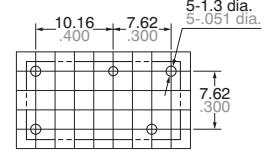


Tolerance: ±0.1 ±.004

## REFERENCE DATA

Max. switching capacity (1 Form A type)

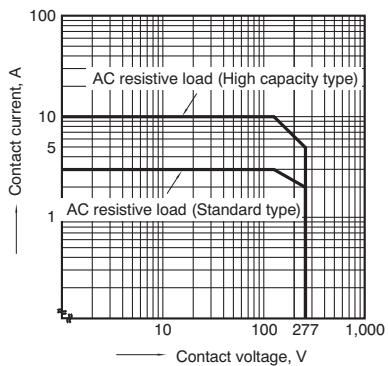


Max. switching capacity (1 Form C type)

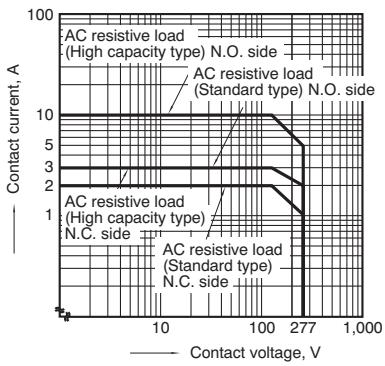

### Standard type


1-(1). Operate & release time (1 Form A type)

Tested sample: JQ1a-12V-F, 25 pcs.

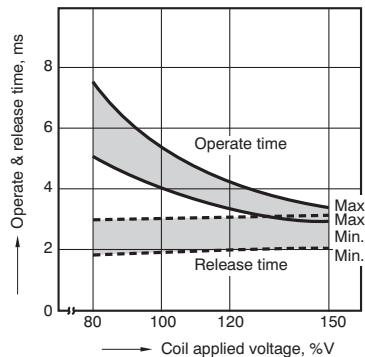


1-(2). Operate & release time (1 Form C type)

Tested sample: JQ1-24V-F, 25 pcs.

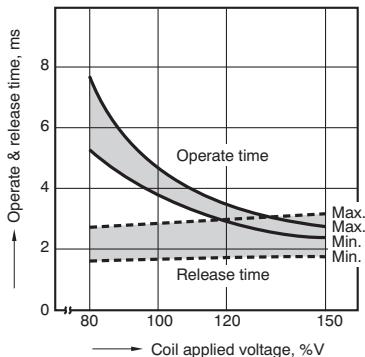

2. Life curve


Ambient temperature: room temperature

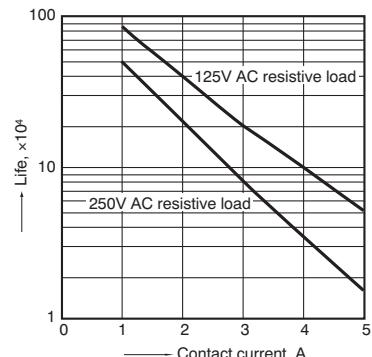

3-(1). Coil temperature rise (1 Form A type)

Contact carrying current: 3 A, 5 A


Measured portion: Inside the coil

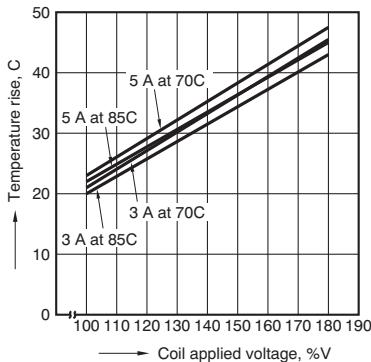

3-(2). Coil temperature rise (1 Form C type)

Contact carrying current: 3 A, 5 A


Measured portion: Inside the coil

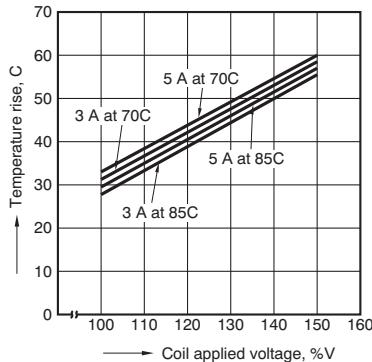

4-(1). Ambient temperature characteristics (1 Form A type)

Tested sample: JQ1a-24V-F


Contact carrying current: 3 A, 5 A

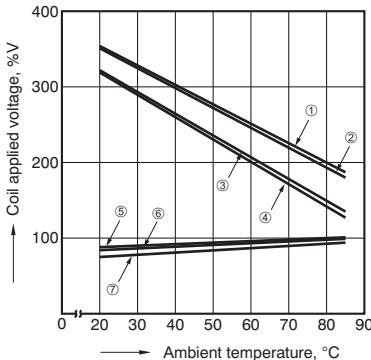

4-(2). Ambient temperature characteristics (1 Form C type)

Tested sample: JQ1-24V-F

Contact carrying current: 3 A, 5 A

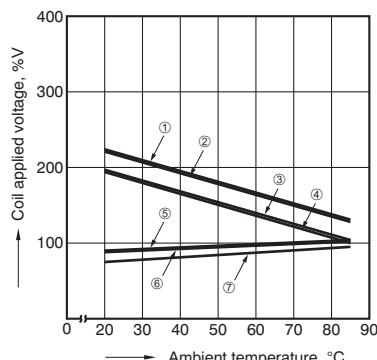

① Allowable ambient temperature against % coil voltage (max. inside the coil temperature set as 130°C 266°F) (Carrying current: 3 A)

② Allowable ambient temperature against % coil voltage (max. inside the coil temperature set as 130°C 266°F) (Carrying current: 5 A)

③ Allowable ambient temperature against % coil voltage (max. inside the coil temperature set as 115°C 239°F) (Carrying current: 3 A)

④ Allowable ambient temperature against % coil voltage (max. inside the coil temperature set as 115°C 239°F) (Carrying current: 5 A)


⑤ Pick-up voltage with a hot-start condition of 100%V on the coil (Carrying current: 5 A)

⑥ Pick-up voltage with a hot-start condition of 100%V on the coil (Carrying current: 3 A)


⑦ Pick-up voltage

**High capacity type**


1-(1). Operate & release time (1 Form A type)  
Tested sample: JQ1aP-12V-F, 25 pcs.

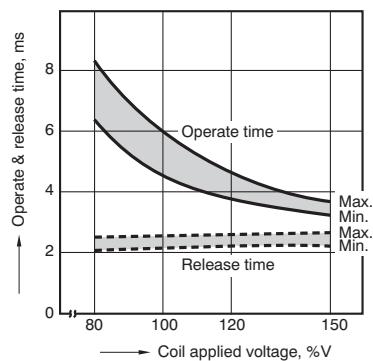


1-(2). Operate & release time (1 Form C type)  
Tested sample: JQ1P-12V-F, 25 pcs.

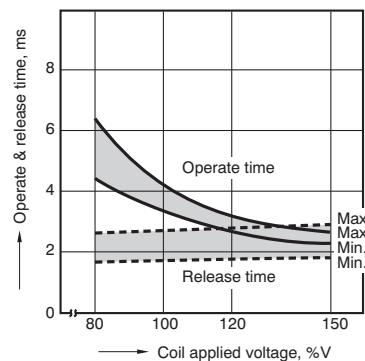**2. Life curve**


Ambient temperature: room temperature

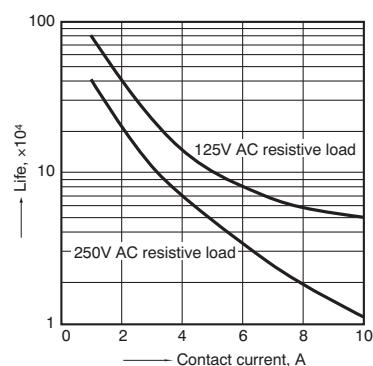**3-(1). Coil temperature rise (1 Form A type)**


Contact carrying current: 5 A, 10 A  
Measured portion: Inside the coil

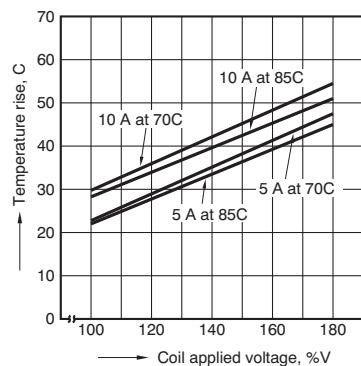**3-(2). Coil temperature rise (1 Form C type)**


Contact carrying current: 5 A, 10 A  
Measured portion: Inside the coil

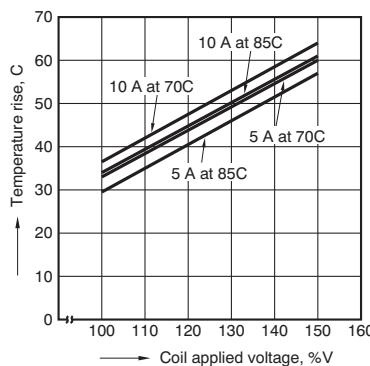**4-(1). Ambient temperature characteristics (1 Form A type)**

Tested sample: JQ1aP-24V-F  
Contact carrying current: 5 A, 10 A

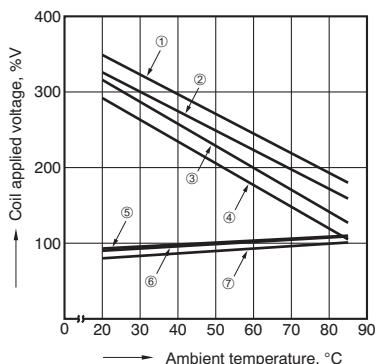**4-(2). Ambient temperature characteristics (1 Form C type)**

Tested sample: JQ1P-24V-F  
Contact carrying current: 5 A, 10 A

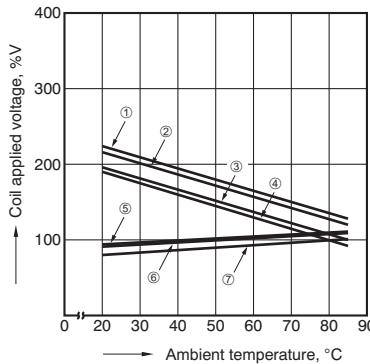

① Allowable ambient temperature against % coil voltage (max. inside the coil temperature set as 130°C 266°F) (Carrying current: 5 A)

② Allowable ambient temperature against % coil voltage (max. inside the coil temperature set as 130°C 266°F) (Carrying current: 10 A)

③ Allowable ambient temperature against % coil voltage (max. inside the coil temperature set as 115°C 239°F) (Carrying current: 5 A)

④ Allowable ambient temperature against % coil voltage (max. inside the coil temperature set as 115°C 239°F) (Carrying current: 10 A)

⑤ Pick-up voltage with a hot-start condition of 100%V on the coil (Carrying current: 10 A)

⑥ Pick-up voltage with a hot-start condition of 100%V on the coil (Carrying current: 5 A)

⑦ Pick-up voltage

**SAFETY STANDARDS**

Item	UL/C-UL (Recognized)		CSA (Certified)		VDE (Certified)		TÜV (Certified)		SEMKO (Certified)	
	File No.	Contact rating	File No.	Contact rating	File No.	Contact rating	File No.	Rating	File No.	Contact rating
Standard type (5A) 1 Form A	E43028	5A 125V AC 5A 277V AC 5A 30V DC 0.3A 110V DC 1/10HP 125V AC 1/6HP 277V AC	LR26550	5A 125V AC 5A 277V AC 5A 30V DC 0.3A 110V DC 1/10HP 125V AC 1/6HP 277V AC	40011435	5A 250V AC (cosφ=0.4)	B 08 09 13461 252	5A 250V AC (cosφ=0.4) 5A 30V DC (0ms)	817138	3(2)A 125V AC 2(1)A 250V AC 5A 30V DC
Standard type (5A) 1 Form C	E43028	5A 125V AC 5A 277V AC 5A 30V DC 0.3A 110V DC 1/10HP 125V AC 1/6HP 277V AC	LR26550	5A 125V AC 5A 277V AC 5A 30V DC 0.3A 110V DC 1/10HP 125V AC 1/6HP 277V AC	40011435	5A 250V AC (cosφ=0.4) (N.O.) 3A 250V AC (cosφ=0.4) (N.C.)	B 08 09 13461 252	5A 250V AC (cosφ=0.4) 5A 30V DC (0ms)	817138	3(2)A 125V AC 2(1)A 250V AC 5A 30V DC
High capacity type (10A) 1 Form A	E43028	10A 125V AC 8A 277V AC 5A 30V DC 0.3A 110V DC 1/6HP 125V AC 1/6HP 277V AC	LR26550	10A 125V AC 8A 277V AC 5A 30V DC 0.3A 110V DC 1/6HP 125V AC 1/6HP 277V AC	40011435	10A 250V AC (cosφ=0.4)	B 08 09 13461 252	10A 250V AC (cosφ=0.4) 5A 30V DC (0ms)	817138	5(3)A 250V AC 5A 30V DC
High capacity type (10A) 1 Form C	E43028	10A 125V AC 8A 277V AC 5A 30V DC 0.3A 110V DC 1/6HP 125V AC 1/6HP 277V AC	LR26550	10A 125V AC 8A 277V AC 5A 30V DC 0.3A 110V DC 1/6HP 125V AC 1/6HP 277V AC	40011435	(N.O.) 10A 250V AC (cosφ=0.4) (N.C.) 3A 250V AC (cosφ=0.4)	B 08 09 13461 252	10A 250V AC (cosφ=0.4) 5A 30V DC (0ms)	817138	5(3)A 250V AC 5A 30V DC

**For Cautions for Use, see [Relay Technical Information](#).**

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for [General Purpose Relays](#) category:***

***Click to view products by [Panasonic manufacturer:](#)***

Other Similar products are found below :

[APF30318](#) [JVN1AF-4.5V-F](#) [PCN-105D3MHZ](#) [5JO-10000S-SIL](#) [5JO-1000CD-SIL](#) [5JO-400CD-SIL](#) [LY2S-AC220/240](#) [LYQ20DC12](#)  
[6031007G](#) [6131406HQ](#) [6-1393099-3](#) [6-1393099-8](#) [6-1393122-4](#) [6-1393123-2](#) [6-1393767-1](#) [6-1393843-7](#) [6-1415012-1](#) [6-1419102-2](#) [6-1423698-4](#) [6-1608051-6](#) [6-1608067-0](#) [6-1616170-6](#) [6-1616248-2](#) [6-1616282-3](#) [6-1616348-2](#) [6-1616350-1](#) [6-1616350-8](#) [6-1616358-7](#) [6-1616359-9](#) [6-1616360-9](#) [6-1616931-6](#) [6-1617039-1](#) [6-1617052-1](#) [6-1617090-2](#) [6-1617090-5](#) [6-1617347-5](#) [6-1617353-3](#) [6-1617801-8](#) [6-1617802-2](#) [6-1618107-9](#) [6-1618248-4](#) [M83536/1-027M](#) [CX-4014](#) [MAHC-5494](#) [MAVCD-5419-6](#) [703XCX-120A](#) [7-1393100-5](#) [7-1393111-7](#)  
[7-1393144-5](#) [7-1393767-8](#)