Old Company Name in Catalogs and Other Documents

On April 1st, 2010, NEC Electronics Corporation merged with Renesas Technology Corporation, and Renesas Electronics Corporation took over all the business of both companies. Therefore, although the old company name remains in this document, it is a valid Renesas Electronics document. We appreciate your understanding.

Renesas Electronics website: http://www.renesas.com

April 1st, 2010 Renesas Electronics Corporation

Issued by: Renesas Electronics Corporation (http://www.renesas.com)

Send any inquiries to http://www.renesas.com/inquiry.



Notice

- 1. All information included in this document is current as of the date this document is issued. Such information, however, is subject to change without any prior notice. Before purchasing or using any Renesas Electronics products listed herein, please confirm the latest product information with a Renesas Electronics sales office. Also, please pay regular and careful attention to additional and different information to be disclosed by Renesas Electronics such as that disclosed through our website.
- Renesas Electronics does not assume any liability for infringement of patents, copyrights, or other intellectual property rights
 of third parties by or arising from the use of Renesas Electronics products or technical information described in this document.
 No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights
 of Renesas Electronics or others.
- 3. You should not alter, modify, copy, or otherwise misappropriate any Renesas Electronics product, whether in whole or in part.
- 4. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation of these circuits, software, and information in the design of your equipment. Renesas Electronics assumes no responsibility for any losses incurred by you or third parties arising from the use of these circuits, software, or information.
- 5. When exporting the products or technology described in this document, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations. You should not use Renesas Electronics products or the technology described in this document for any purpose relating to military applications or use by the military, including but not limited to the development of weapons of mass destruction. Renesas Electronics products and technology may not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations.
- 6. Renesas Electronics has used reasonable care in preparing the information included in this document, but Renesas Electronics does not warrant that such information is error free. Renesas Electronics assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.
- 7. Renesas Electronics products are classified according to the following three quality grades: "Standard", "High Quality", and "Specific". The recommended applications for each Renesas Electronics product depends on the product's quality grade, as indicated below. You must check the quality grade of each Renesas Electronics product before using it in a particular application. You may not use any Renesas Electronics product for any application categorized as "Specific" without the prior written consent of Renesas Electronics. Further, you may not use any Renesas Electronics product for any application for which it is not intended without the prior written consent of Renesas Electronics. Renesas Electronics shall not be in any way liable for any damages or losses incurred by you or third parties arising from the use of any Renesas Electronics product for an application categorized as "Specific" or for which the product is not intended where you have failed to obtain the prior written consent of Renesas Electronics. The quality grade of each Renesas Electronics product is "Standard" unless otherwise expressly specified in a Renesas Electronics data sheets or data books, etc.
 - "Standard": Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; and industrial robots.
 - "High Quality": Transportation equipment (automobiles, trains, ships, etc.); traffic control systems; anti-disaster systems; anti-crime systems; safety equipment; and medical equipment not specifically designed for life support.
 - "Specific": Aircraft; aerospace equipment; submersible repeaters; nuclear reactor control systems; medical equipment or systems for life support (e.g. artificial life support devices or systems), surgical implantations, or healthcare intervention (e.g. excision, etc.), and any other applications or purposes that pose a direct threat to human life.
- 8. You should use the Renesas Electronics products described in this document within the range specified by Renesas Electronics, especially with respect to the maximum rating, operating supply voltage range, movement power voltage range, heat radiation characteristics, installation and other product characteristics. Renesas Electronics shall have no liability for malfunctions or damages arising out of the use of Renesas Electronics products beyond such specified ranges.
- 9. Although Renesas Electronics endeavors to improve the quality and reliability of its products, semiconductor products have specific characteristics such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Further, Renesas Electronics products are not subject to radiation resistance design. Please be sure to implement safety measures to guard them against the possibility of physical injury, and injury or damage caused by fire in the event of the failure of a Renesas Electronics product, such as safety design for hardware and software including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult, please evaluate the safety of the final products or system manufactured by you.
- 10. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. Please use Renesas Electronics products in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. Renesas Electronics assumes no liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
- 11. This document may not be reproduced or duplicated, in any form, in whole or in part, without prior written consent of Renesas Electronics
- 12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products, or if you have any other inquiries.
- (Note 1) "Renesas Electronics" as used in this document means Renesas Electronics Corporation and also includes its majority-owned subsidiaries.
- (Note 2) "Renesas Electronics product(s)" means any product developed or manufactured by or for Renesas Electronics.



RD74LVC16245B

16-bit Bus Transceivers with 3-state Outputs

REJ03D0529-0100 Rev.1.00 Apr. 18, 2005

Description

The RD74LVC16245B has sixteen two direction buffers, for the fittest at two direction bus lines with three state outputs. A direction control input, DIR. When DIR is high, data flows from the A inputs to the B outputs. When DIR is low, data flows from the B inputs to the A outputs. When enable inputs (\overline{G}) is high, disables both A and B ports by placing then in a high impedance. Low voltage and high-speed operation is suitable at the battery drive product (note type personal computer) and low power consumption extends the life of a battery for long time operation.

Features

- $V_{CC} = 1.65 \text{ V to } 5.5 \text{ V}$
- All inputs V_{IH} (Max.) = 5.5 V (@ V_{CC} = 0 V to 5.5 V)
- All outputs V_{OUT} (Max.) = 5.5 V (@ V_{CC} = 0 V or output off state)
- Typical V_{OL} ground bounce < 0.8 V (@ V_{CC} = 3.3 V, Ta = 25°C)
- Typical V_{OH} undershoot > 2.0 V (@ V_{CC} = 3.3 V, Ta = 25°C)
- High output current $\pm 4 \text{ mA} (@V_{CC} = 1.65 \text{ V})$
 - $\pm 8 \text{ mA } (@V_{CC} = 2.3 \text{ V})$
 - $\pm 12 \text{ mA } (@V_{CC} = 2.7 \text{ V})$
 - ± 24 mA (@V_{CC} = 3.0 V to 5.5 V)
- Ordering Information

Part Name	Package Type	Package Code (Previous Code)	Package Abbreviation	Taping Abbreviation (Quantity)
RD74LVC16245BTEL	TSSOP-48 pin	PTSP0048KA-A (TTP-48DBV)	Т	EL (1,000 pcs/reel)

Function Table

Inp	outs	
G	DIR	Operation
L	L	B data to A bus
L	Н	A data to B bus
Н	X	Z


H: High level

L: Low level

X: Immaterial

Z: High impedance

Pin Arrangement

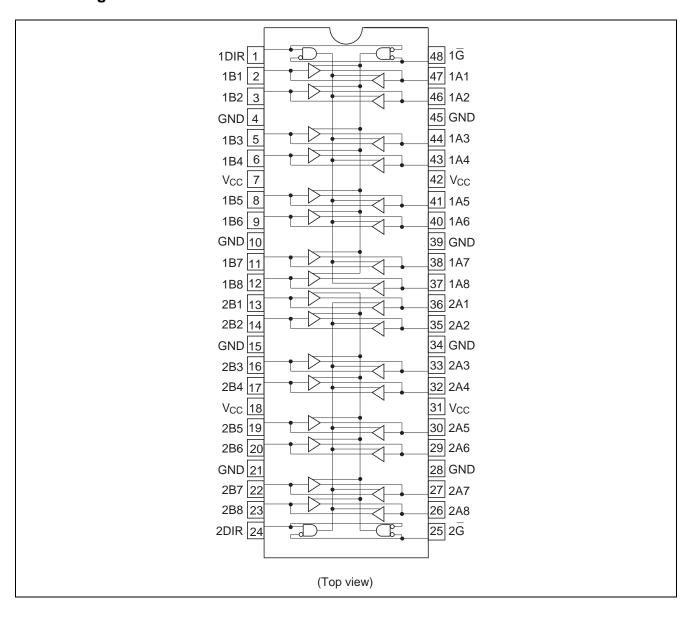

Absolute Maximum Ratings

Item	Symbol	Ratings	Unit	Conditions		
Supply voltage	V _{CC}	–0.5 to 7.0	V			
Input diode current	I _{IK}	– 50	mA	$V_1 = -0.5 \text{ V}$		
Input voltage	VI	-0.5 to 7.0	V			
Output diode current	I _{OK}	-50	mA	$V_{O} = -0.5 \text{ V}$		
		50		$V_O = V_{CC} + 0.5 \text{ V}$		
Input / output voltage	V _{I/O}	-0.5 to V _{CC} +0.5	V	Output "H" or "L"		
		–0.5 to 7.0		Output "Z" or V _{CC} :OFF		
Output current	Io	±50	mA			
V _{CC} , GND current / pin	I _{CC} or I _{GND}	100	mA			
Storage temperature	Tstg	–65 to 150	°C			

Note: The absolute maximum ratings are values, which must not individually be exceeded, and furthermore, no two of which may be realized at the same time.

Recommended Operating Conditions

Item	Symbol	Ratings	Unit	Conditions
Supply voltage	V _{CC}	1.5 to 5.5	V	Data hold
		1.65 to 5.5		At operation
Input / output voltage	VI	0 to 5.5	V	
	Vo	0 to V _{CC}		Output "H" or "L"
		0 to 5.5		Output "Z" or V _{CC} : OFF
Operating temperature	Та	-40 to 85	°C	
Output current	I _{OH}	-4	mA	V _{CC} = 1.65 V
		-8		$V_{CC} = 2.3 \text{ V}$
		-12		$V_{CC} = 2.7 \text{ V}$
		-24		V _{CC} = 3.0 V to 5.5 V
	I _{OL}	4	mA	V _{CC} = 1.65 V
		8		$V_{CC} = 2.3 \text{ V}$
		12		$V_{CC} = 2.7 \text{ V}$
		24		V _{CC} = 3.0 V to 5.5 V
Input rise / fall time *1	t _r , t _f	20	ns/V	V _{CC} = 1.65 V to 2.7 V
		10		V _{CC} = 3.0 V to 5.5 V

Notes: 1. This item guarantees maximum limit when one input switches.

Waveform: Refer to test circuit of switching characteristics.

Electrical Characteristics

			Ta = -40) to 85°C		
Item	Symbol	V _{CC} (V)	Min	Max	Unit	Test Conditions
Input voltage	V _{IH}	1.65 to 1.95	V _{CC} ×0.65	_	V	
		2.3 to 2.7	1.7	_		
		2.7 to 3.6	2.0	_		
		4.5 to 5.5	V _{CC} ×0.7	_		
	V _{IL}	1.65 to 1.95		V _{CC} ×0.35	V	
		2.3 to 2.7	_	0.7		
		2.7 to 3.6	_	0.8		
		4.5 to 5.5	_	V _{CC} ×0.3		
Output voltage	V _{OH}	1.65 to 5.5	V _{CC} -0.2	_	V	I _{OH} = -100 μA
		1.65	1.2	_		$I_{OH} = -4 \text{ mA}$
		2.3	1.7	_		$I_{OH} = -8 \text{ mA}$
		2.7	2.2	_		$I_{OH} = -12 \text{ mA}$
		3.0	2.4	_		
		3.0	2.2	_		$I_{OH} = -24 \text{ mA}$
		4.5	3.8	_		
	V _{OL}	1.65 to 5.5	_	0.2	V	I _{OL} = 100 μA
		1.65	_	0.45		$I_{OL} = 4 \text{ mA}$
		2.3		0.7		$I_{OL} = 8 \text{ mA}$
		2.7	_	0.4		I _{OL} = 12 mA
		3.0	_	0.55		I _{OL} = 24 mA
		4.5	_	0.55		
Input current	I _{IN}	0 to 5.5	_	±5.0	μΑ	$V_{IN} = 5.5 \text{ V or GND}$
Output leak current	I _{OFF}	0	_	±5.0	μΑ	$V_{IN} / V_{OUT} = 5.5 V$
Off state output	loz	2.7 to 5.5	_	±5.0	μA	$V_{IN} = V_{CC}$, GND,
current						$V_{OUT} = 5.5 \text{ V or GND}$
Quiescent supply	I _{CC}	2.7 to 3.6	_	±10	μA	V _{IN} = 3.6 to 5.5 V
current		2.7 to 5.5	_	10		$V_{IN} = V_{CC}$ or GND
	Δlcc	2.7 to 3.6	_	500	μΑ	V_{IN} = one input at (V_{CC} –0.6)V, other inputs at V_{CC} or GND

Switching Characteristics

			Та	Ta = -40 to 85°C			From	То
Item	Symbol	V _{cc} (V)	Min	Тур	Max	Unit	(Input)	(Output)
Propagation delay time	t _{PLH}	1.8±0.15	1.0	_	12.7	ns	A or B	B or A
	t _{PHL}	2.5±0.2	1.0	_	8.3			
		2.7	1.0	_	5.8			
		3.3±0.3	1.5	_	5.2			
		5.0±0.5	1.0	_	4.5			
Output enable time	t _{ZH}	1.8±0.15	1.0	_	15.3	ns	G	A or B
	t_{ZL}	2.5±0.2	1.0	_	10.5			
		2.7	1.0	_	8.0			
		3.3±0.3	1.5	_	7.2			
		5.0±0.5	1.0	_	6.0			
Output disable time	t _{HZ}	1.8±0.15	1.0	_	17.0	ns	G	A or B
	t_{LZ}	2.5±0.2	1.0	_	9.5			
		2.7	1.0	_	8.0			
		3.3±0.3	1.5	_	7.2			
		5.0±0.5	1.0	_	6.0			
Between output pins skew	t _{OSLH}	1.8±0.15	_	_	_	ns		
*1	toshl	2.5±0.2	_	_	_			
		2.7	_	_	_			
		3.3±0.3	_	_	1.0			
		5.0±0.5	_	_	1.0			
Input capacitance	C _{IN}	3.3	_	4.0	_	pF		
Output capacitance	Co	3.3	_	8.0	_	pF		


Note: 1. This parameter is characterized but not tested.

 $tos_{LH} = |\ t_{PLHm} - t_{PLHn}|,\ tos_{HL} = |\ t_{PHLm} - t_{PHLn}|$


Operating Characteristics

			Ta = 25°C				
Item	Symbol	V _{CC} (V)	Min	Тур	Max	Unit	Test Conditions
Power dissipation	C _{PD}	1.8	_	42	_	pF	f = 10 MHz
capacitance		2.5	_	43	_		
		3.3	_	45	_		
		5.0	_	47	_		


Test Circuit

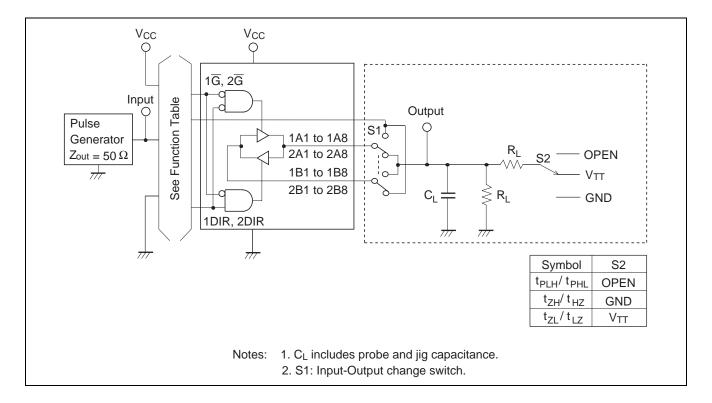

Waveforms - 1

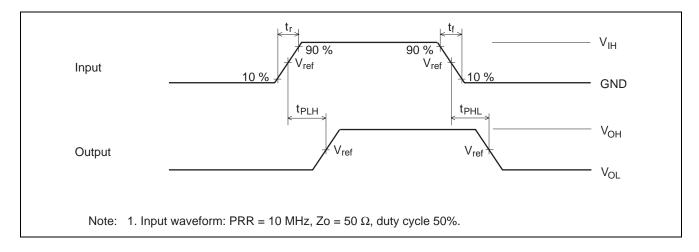

Waveforms - 2

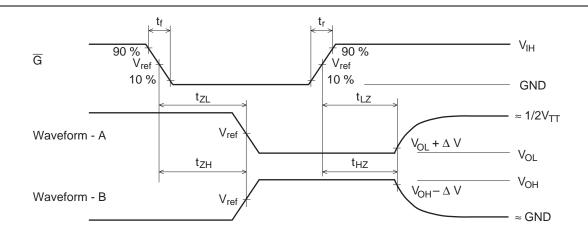


	INPUTS						
Vcc (V)	Vı	tr/tf	Vref	VTT	CL	RL	ΔV
Vcc = 1.8±0.15 V	Vcc	≤ 2 ns	1/2 Vcc	2× Vcc	30 pF	1.0 kΩ	0.15 V
Vcc = 2.5±0.2 V	Vcc	≤ 2 ns	1/2 Vcc	2× Vcc	30 pF	500 Ω	0.15 V
Vcc = 2.7 V	2.7 V	≤ 2.5 ns	1.5 V	6 V	50 pF	500 Ω	0.3 V
Vcc = 3.3±0.3 V	2.7 V	≤ 2.5 ns	1.5 V	6 V	50 pF	500 Ω	0.3 V
Vcc = 5.0±0.5 V	Vcc	≤ 2.5 ns	1/2 Vcc	2× Vcc	50 pF	500 Ω	0.3 V

Notes:

- 1. Input waveform: PRR = 10 MHz, $Zo = 50 \Omega$, duty cycle 50%
- 2. Waveform A shows input conditions such that the output is "L" level when enable by the output control.
- 3. Waveform B shows input conditions such that the output is "H" level when enable by the output control.

Package Dimensions

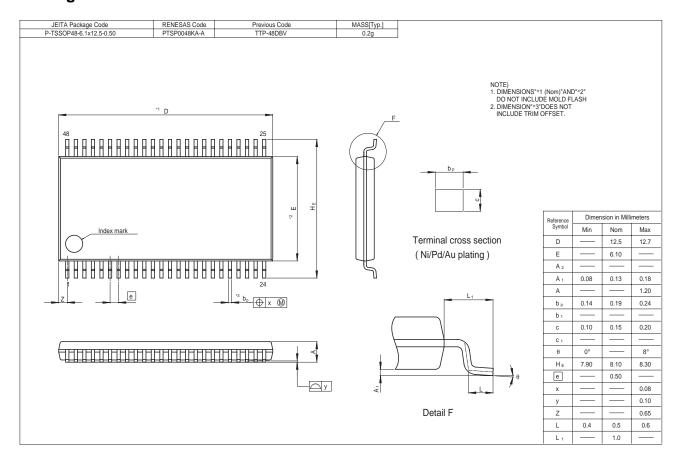

Renesas Technology Corp. Sales Strategic Planning Div. Nippon Bldg., 2-6-2, Ohte-machi, Chiyoda-ku, Tokyo 100-0004, Japan

Keep safety first in your circuit designs!

1. Renesas Technology Corp. puts the maximum effort into making semiconductor products better and more reliable, but there is always the possibility that trouble may occur with them. Trouble with semiconductors may lead to personal injury, fire or property damage.

Remember to give due consideration to safety when making your circuit designs, with appropriate measures such as (i) placement of substitutive, auxiliary circuits, (ii) use of nonflammable material or (iii) prevention against any malfunction or mishap.

- (ii) use of nonframmable material of (iii) prevention against any maintunction or misnap.

 Notes regarding these materials are intended as a reference to assist our customers in the selection of the Renesas Technology Corp. product best suited to the customer's application; they do not convey any license under any intellectual property rights, or any other rights, belonging to Renesas Technology Corp. or a third party.

 Renesas Technology Corp. assumes no responsibility for any damage, or infringement of any third-party's rights, originating in the use of any product data, diagrams, charts, programs, algorithms, or circuit application examples contained in these materials.

 All information contained in these materials, including product data, diagrams, charts, programs and algorithms represents information on products at the time of publication of these materials, and are subject to change by Renesas Technology Corp. without notice due to product improvements or other reasons. It is therefore recommended that customers contact Renesas Technology Corp. or an authorized Renesas Technology Corp. product distributor for the latest product information before purchasing a product listed herein.

 The information described here may contain technical inaccuracies or typographical errors.

 Renesas Technology Corp. assumes no responsibility for any damage, liability, or other loss rising from these inaccuracies or errors.

 Please also pay attention to information published by Renesas Technology Corp. by various means, including the Renesas Technology Corp. Semiconductor home page (http://www.renesas.com).

 4. When using any or all of the information contained in these materials, including product data, diagrams, charts, programs, and algorithms, please be sure to evaluate all information as a total system before making a final decision on the applicability of the information and products. Renesas Technology Corp. assumes no responsibility for any damage, liability or other loss resulting from the information contained her

- The prior written approval of Renesas Technology Corp. is necessary to reprint or reproduce in whole or in part these materials.

 If these products or technologies are subject to the Japanese export control restrictions, they must be exported under a license from the Japanese government and cannot be imported into a country other than the approved destination.

 Any diversion or reexport contrary to the export control laws and regulations of Japan and/or the country of destination is prohibited.
- 8. Please contact Renesas Technology Corp. for further details on these materials or the products contained therein.



RENESAS SALES OFFICES

http://www.renesas.com

Refer to "http://www.renesas.com/en/network" for the latest and detailed information.

Renesas Technology America, Inc. 450 Holger Way, San Jose, CA 95134-1368, U.S.A Tel: <1> (408) 382-7500, Fax: <1> (408) 382-7501

Renesas Technology Europe Limited
Dukes Meadow, Millboard Road, Bourne End, Buckinghamshire, SL8 5FH, U.K. Tel: <44> (1628) 585-100, Fax: <44> (1628) 585-900

Renesas Technology Hong Kong Ltd.
7th Floor, North Tower, World Finance Centre, Harbour City, 1 Canton Road, Tsimshatsui, Kowloon, Hong Kong Tel: <852> 2265-6688, Fax: <852> 2730-6071

Renesas Technology Taiwan Co., Ltd.10th Floor, No.99, Fushing North Road, Taipei, Taiwan Tel: <886> (2) 2715-2888, Fax: <886> (2) 2713-2999

Renesas Technology (Shanghai) Co., Ltd. Unit2607 Ruijing Building, No.205 Maoming Road (S), Shanghai 200020, China Tel: <86> (21) 6472-1001, Fax: <86> (21) 6415-2952

Renesas Technology Singapore Pte. Ltd.
1 Harbour Front Avenue, #06-10, Keppel Bay Tower, Singapore 098632 Tel: <65> 6213-0200, Fax: <65> 6278-8001

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Bus Transceivers category:

Click to view products by Renesas manufacturer:

Other Similar products are found below:

 74LS645N
 FXL4TD245UMX
 74LVT245BBT20-13
 5962-8683401DA
 PCA9617ADMR2G
 5962-8953501KA
 5962-86834012A
 5962

 7802301Q2A
 5962-7802002MFA
 5962-7802001MFA
 74VHCV245FT(BJ)
 NCV7349D13R2G
 TC74VCX164245(EL,F
 FST3125DTR2G

 MC74LCX245MNTWG
 TC7WPB8306L8X,LF(S
 TC7WPB9307FC(TE85L
 74FCT16245CTPVG8
 74FCT16543CTPVG

 74FCT245CTPYG8
 MM74HC245AMTCX
 74LVCH16245APVG
 74LVCH32245ABFG
 74LVX245MTC
 NTS0102DP-Q100H

 74ALVC16245MTDX
 74ALVCH32245BF
 74FCT163245APVG
 74FCT245ATPYG8
 74FCT245CTQG
 74FCT3245AQG

 74LCXR162245MTX
 74VHC245M
 TC7WPB9306FC(TE85L
 TC7WPB9306FK(T5L,F
 JM38510/65553BRA
 ST3384EBDR

 74LVC1T45GF,132
 74AVC4TD245BQ,115
 PQJ7980AHN/C0JL,51
 MC100EP16VBDG
 FXL2TD245L10X
 74LVC1T45GM,115

 TC74AC245P(F)
 SNJ54ABT245AFK
 PI74AVC164245AAEX
 74LVT245BBT20-13
 PI74AVC164245AEX