# Old Company Name in Catalogs and Other Documents

On April 1<sup>st</sup>, 2010, NEC Electronics Corporation merged with Renesas Technology Corporation, and Renesas Electronics Corporation took over all the business of both companies. Therefore, although the old company name remains in this document, it is a valid Renesas Electronics document. We appreciate your understanding.

Renesas Electronics website: <a href="http://www.renesas.com">http://www.renesas.com</a>

April 1<sup>st</sup>, 2010 Renesas Electronics Corporation

Issued by: Renesas Electronics Corporation (http://www.renesas.com)

Send any inquiries to <a href="http://www.renesas.com/inquiry">http://www.renesas.com/inquiry</a>.



#### Notice

- 1. All information included in this document is current as of the date this document is issued. Such information, however, is subject to change without any prior notice. Before purchasing or using any Renesas Electronics products listed herein, please confirm the latest product information with a Renesas Electronics sales office. Also, please pay regular and careful attention to additional and different information to be disclosed by Renesas Electronics such as that disclosed through our website.
- Renesas Electronics does not assume any liability for infringement of patents, copyrights, or other intellectual property rights
  of third parties by or arising from the use of Renesas Electronics products or technical information described in this document.
  No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights
  of Renesas Electronics or others.
- 3. You should not alter, modify, copy, or otherwise misappropriate any Renesas Electronics product, whether in whole or in part.
- 4. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation of these circuits, software, and information in the design of your equipment. Renesas Electronics assumes no responsibility for any losses incurred by you or third parties arising from the use of these circuits, software, or information.
- 5. When exporting the products or technology described in this document, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations. You should not use Renesas Electronics products or the technology described in this document for any purpose relating to military applications or use by the military, including but not limited to the development of weapons of mass destruction. Renesas Electronics products and technology may not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations.
- 6. Renesas Electronics has used reasonable care in preparing the information included in this document, but Renesas Electronics does not warrant that such information is error free. Renesas Electronics assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.
- 7. Renesas Electronics products are classified according to the following three quality grades: "Standard", "High Quality", and "Specific". The recommended applications for each Renesas Electronics product depends on the product's quality grade, as indicated below. You must check the quality grade of each Renesas Electronics product before using it in a particular application. You may not use any Renesas Electronics product for any application categorized as "Specific" without the prior written consent of Renesas Electronics. Further, you may not use any Renesas Electronics product for any application for which it is not intended without the prior written consent of Renesas Electronics. Renesas Electronics shall not be in any way liable for any damages or losses incurred by you or third parties arising from the use of any Renesas Electronics product for an application categorized as "Specific" or for which the product is not intended where you have failed to obtain the prior written consent of Renesas Electronics. The quality grade of each Renesas Electronics product is "Standard" unless otherwise expressly specified in a Renesas Electronics data sheets or data books, etc.
  - "Standard": Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; and industrial robots.
  - "High Quality": Transportation equipment (automobiles, trains, ships, etc.); traffic control systems; anti-disaster systems; anti-crime systems; safety equipment; and medical equipment not specifically designed for life support.
  - "Specific": Aircraft; aerospace equipment; submersible repeaters; nuclear reactor control systems; medical equipment or systems for life support (e.g. artificial life support devices or systems), surgical implantations, or healthcare intervention (e.g. excision, etc.), and any other applications or purposes that pose a direct threat to human life.
- 8. You should use the Renesas Electronics products described in this document within the range specified by Renesas Electronics, especially with respect to the maximum rating, operating supply voltage range, movement power voltage range, heat radiation characteristics, installation and other product characteristics. Renesas Electronics shall have no liability for malfunctions or damages arising out of the use of Renesas Electronics products beyond such specified ranges.
- 9. Although Renesas Electronics endeavors to improve the quality and reliability of its products, semiconductor products have specific characteristics such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Further, Renesas Electronics products are not subject to radiation resistance design. Please be sure to implement safety measures to guard them against the possibility of physical injury, and injury or damage caused by fire in the event of the failure of a Renesas Electronics product, such as safety design for hardware and software including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult, please evaluate the safety of the final products or system manufactured by you.
- 10. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. Please use Renesas Electronics products in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. Renesas Electronics assumes no liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
- 11. This document may not be reproduced or duplicated, in any form, in whole or in part, without prior written consent of Renesas Electronics.
- 12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products, or if you have any other inquiries.
- (Note 1) "Renesas Electronics" as used in this document means Renesas Electronics Corporation and also includes its majorityowned subsidiaries.
- (Note 2) "Renesas Electronics product(s)" means any product developed or manufactured by or for Renesas Electronics.



# R1RP0416DI Series

Wide Temperature Range Version 4M High Speed SRAM (256-kword × 16-bit)

REJ03C0110-0100Z Rev. 1.00 Mar.12.2004

#### **Description**

The R1RP0416DI Series is a 4-Mbit high speed static RAM organized 256-k word  $\times$  16-bit. It has realized high speed access time by employing CMOS process (6-transistor memory cell) and high speed circuit designing technology. It is most appropriate for the application which requires high speed, high density memory and wide bit width configuration, such as cache and buffer memory in system. It is packaged in 400-mil 44-pin plastic SOJ and 400-mil 44-pin plastic TSOPII.

#### **Features**

• Single 5.0 V supply:  $5.0 \text{ V} \pm 10\%$ 

• Access time: 12 ns (max)

Completely static memory

— No clock or timing strobe required

• Equal access and cycle times

• Directly TTL compatible

— All inputs and outputs

• Operating current: 160 mA (max)

• TTL standby current: 40 mA (max)


• CMOS standby current: 5 mA (max)

• Center V<sub>CC</sub> and V<sub>ss</sub> type pin out

• Temperature range:  $-40 \text{ to } +85^{\circ}\text{C}$ 


#### **Ordering Information**

Type No.	Access time	Package
R1RP0416DGE-2PI	12 ns	400-mil 44-pin plastic SOJ (44P0K)
R1RP0416DSB-2PI	12 ns	400-mil 44-pin plastic TSOPII (44P3W-H)






#### **Pin Arrangement**

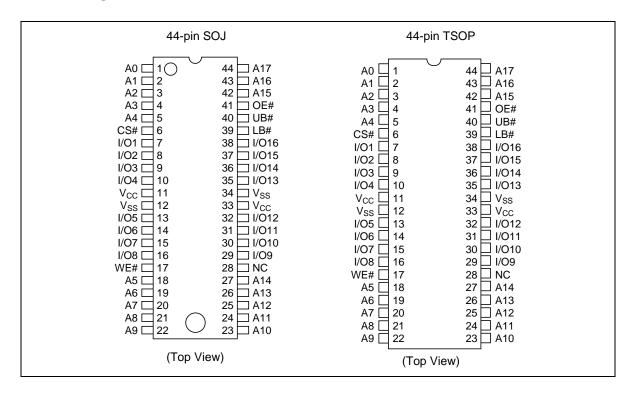

#### **Pin Description**

Pin name	Function	
A0 to A17	Address input	
I/O1 to I/O16	Data input/output	
CS#	Chip select	
OE#	Output enable	
WE#	Write enable	
UB#	Upper byte select	
LB#	Lower byte select	
V <sub>cc</sub>	Power supply	
$V_{ss}$	Ground	
NC	No connection	

#### **Block Diagram**

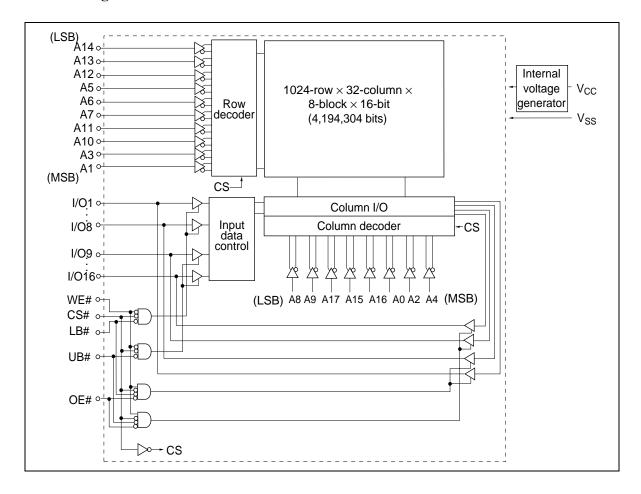

### **Operation Table**

CS#	OE#	WE#	LB#	UB#	Mode	$\mathbf{V}_{\mathrm{cc}}$ current	I/O1–I/O8	I/O9–I/O16	Ref. cycle
Н	×	×	×	×	Standby	I <sub>SB</sub> , I <sub>SB1</sub>	High-Z	High-Z	_
L	Н	Н	×	×	Output disable	I <sub>cc</sub>	High-Z	High-Z	_
L	L	Н	L	L	Read	I <sub>cc</sub>	Output	Output	Read cycle
L	L	Н	L	Н	Lower byte read	I <sub>cc</sub>	Output	High-Z	Read cycle
L	L	Н	Н	L	Upper byte read	I <sub>cc</sub>	High-Z	Output	Read cycle
L	L	Н	Н	Н	_	I <sub>cc</sub>	High-Z	High-Z	_
L	×	L	L	L	Write	I <sub>cc</sub>	Input	Input	Write cycle
L	×	L	L	Н	Lower byte write	I <sub>cc</sub>	Input	High-Z	Write cycle
L	×	L	Н	L	Upper byte write	I <sub>cc</sub>	High-Z	Input	Write cycle
L	×	L	Н	Н	_	I <sub>cc</sub>	High-Z	High-Z	_

Note: H:  $V_{IH}$ , L:  $V_{IL}$ ,  $\times$ :  $V_{IH}$  or  $V_{IL}$ 

### **Absolute Maximum Ratings**

Parameter	Symbol	Value	Unit
Supply voltage relative to V <sub>ss</sub>	V <sub>cc</sub>	-0.5 to +7.0	V
Voltage on any pin relative to V <sub>ss</sub>	V <sub>T</sub>	$-0.5^{*1}$ to $V_{cc} + 0.5^{*2}$	V
Power dissipation	P <sub>T</sub>	1.0	W
Operating temperature	Topr	-40 to +85	°C
Storage temperature	Tstg	-55 to +125	°C
Storage temperature under bias	Tbias	-40 to +85	°C

Notes: 1.  $V_T$  (min) = -2.0 V for pulse width (under shoot)  $\leq$  6 ns.

2.  $V_{\tau}$  (max) =  $V_{cc}$  + 2.0 V for pulse width (over shoot)  $\leq$  6 ns.

#### **Recommended DC Operating Conditions**

 $(Ta = -40 \text{ to } +85^{\circ}C)$ 

Parameter	Symbol	Min	Тур	Max	Unit
Supply voltage	V <sub>cc</sub> * <sup>3</sup>	4.5	5.0	5.5	V
	V <sub>SS</sub> * <sup>4</sup>	0	0	0	V
Input voltage	V <sub>IH</sub>	2.2	_	V <sub>cc</sub> + 0.5* <sup>2</sup>	V
	$V_{\text{IL}}$	-0.5* <sup>1</sup>	_	0.8	V

Notes: 1.  $V_{\parallel}$  (min) = -2.0 V for pulse width (under shoot)  $\leq$  6 ns.

- 2.  $V_{IH}$  (max) =  $V_{CC}$  + 2.0 V for pulse width (over shoot)  $\leq$  6 ns.
- 3. The supply voltage with all  $\rm V_{\rm cc}$  pins must be on the same level.
- 4. The supply voltage with all  $\rm V_{\rm ss}$  pins must be on the same level.

#### **DC** Characteristics

$$(Ta = -40 \text{ to } +85^{\circ}\text{C}, V_{CC} = 5.0 \text{ V} \pm 10\%, V_{SS} = 0 \text{ V})$$

Parameter	Symbol	Min	Max	Unit	Test conditions
Input leakage current	I <sub>LI</sub>	_	2	μΑ	$V_{IN} = V_{SS}$ to $V_{CC}$
Output leakage current*1	I <sub>LO</sub>	_	2	μΑ	$V_{IN} = V_{SS}$ to $V_{CC}$
Operating power supply current	I <sub>cc</sub>	_	160	mA	$CS\# = V_{IL}, I_{OUT} = 0 \text{ mA}$ $Other inputs = V_{IH}/V_{IL}$
Standby power supply current	l <sub>SB</sub>	_	40	mA	$CS\# = V_{iH},$ Other inputs = $V_{iH}/V_{iL}$
	I <sub>SB1</sub>	_	5	mA	$V_{cc} \ge CS\# \ge V_{cc} - 0.2 V$ ,
					(1) $0 \text{ V} \le V_{IN} \le 0.2 \text{ V or}$
					(2) $V_{CC} \ge V_{IN} \ge V_{CC} - 0.2 \text{ V}$
Output voltage	V <sub>oL</sub>	_	0.4	V	I <sub>OL</sub> = 8 mA
	V <sub>OH</sub>	2.4	_	V	$I_{OH} = -4 \text{ mA}$

#### Capacitance

$$(Ta = +25^{\circ}C, f = 1.0 \text{ MHz})$$

Parameter	Symbol	Min	Max	Unit	Test conditions
Input capacitance*1	C <sub>IN</sub>	_	6	pF	V <sub>IN</sub> = 0 V
Input/output capacitance*1	C <sub>I/O</sub>	_	8	pF	$V_{I/O} = 0 V$

Note: 1. This parameter is sampled and not 100% tested.




#### **AC Characteristics**

(Ta = -40 to +85°C,  $V_{cc}$  = 5.0 V  $\pm$  10%, unless otherwise noted.)

#### **Test Conditions**

Input pulse levels: 3.0 V/0.0 VInput rise and fall time: 3 ns

Input and output timing reference levels: 1.5 V
Output load: See figures (Including scope and jig)

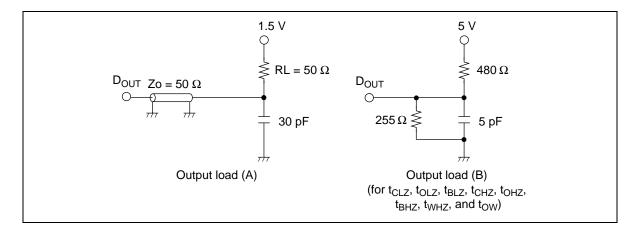

#### Read Cycle

#### R1RP0416DI

		_			Notes	
Parameter	Symbol	Min	Max	Unit		
Read cycle time	t <sub>RC</sub>	12	_	ns		
Address access time	t <sub>AA</sub>	_	12	ns		
Chip select access time	t <sub>ACS</sub>		12	ns		
Output enable to output valid	t <sub>oe</sub>	_	6	ns		
Byte select to output valid	t <sub>BA</sub>	_	6	ns		
Output hold from address change	t <sub>oh</sub>	3	_	ns		
Chip select to output in low-Z	t <sub>cLZ</sub>	3	_	ns	1	
Output enable to output in low-Z	t <sub>oLZ</sub>	0	_	ns	1	
Byte select to output in low-Z	t <sub>BLZ</sub>	0	_	ns	1	
Chip deselect to output in high-Z	t <sub>chz</sub>	_	6	ns	1	
Output disable to output in high-Z	t <sub>OHZ</sub>	_	6	ns	1	
Byte deselect to output in high-Z	t <sub>BHZ</sub>	_	6	ns	1	


#### Write Cycle

		R1RP0	416DI		
		-2			
Parameter	Symbol	Min	Max	Unit	Notes
Write cycle time	t <sub>wc</sub>	12	_	ns	
Address valid to end of write	t <sub>AW</sub>	8	_	ns	
Chip select to end of write	t <sub>cw</sub>	8	_	ns	8
Write pulse width	t <sub>wP</sub>	8	_	ns	7
Byte select to end of write	t <sub>BW</sub>	8	_	ns	
Address setup time	t <sub>AS</sub>	0	_	ns	5
Write recovery time	t <sub>wr</sub>	0	_	ns	6
Data to write time overlap	t <sub>DW</sub>	6	_	ns	
Data hold from write time	t <sub>DH</sub>	0	_	ns	
Write disable to output in low-Z	t <sub>ow</sub>	3	_	ns	1
Output disable to output in high-Z	t <sub>ohz</sub>	_	6	ns	1
Write enable to output in high-Z	t <sub>whz</sub>	_	6	ns	1


- Notes: 1. Transition is measured ±200 mV from steady voltage with output load (B). This parameter is sampled and not 100% tested.
  - 2. If the CS# or LB# or UB# low transition occurs simultaneously with the WE# low transition or after the WE# transition, output remains a high impedance state.
  - 3. WE# and/or CS# must be high during address transition time.
  - 4. If CS#, OE#, LB# and UB# are low during this period, I/O pins are in the output state. Then the data input signals of opposite phase to the outputs must not be applied to them.
  - 5. t<sub>AS</sub> is measured from the latest address transition to the latest of CS#, WE#, LB# or UB# going low.
  - 6.  $t_{wR}$  is measured from the earliest of CS#, WE#, LB# or UB# going high to the first address transition.
  - 7. A write occurs during the overlap of a low CS#, a low WE# and a low LB# or a low UB# ( $t_{wp}$ ). A write begins at the latest transition among CS# going low, WE# going low and LB# going low or UB# going low. A write ends at the earliest transition among CS# going high, WE# going high and LB# going high or UB# going high.
  - 8. t<sub>cw</sub> is measured from the later of CS# going low to the end of write.

### **Timing Waveforms**


Read Timing Waveform (1) (WE# =  $V_{IH}$ )

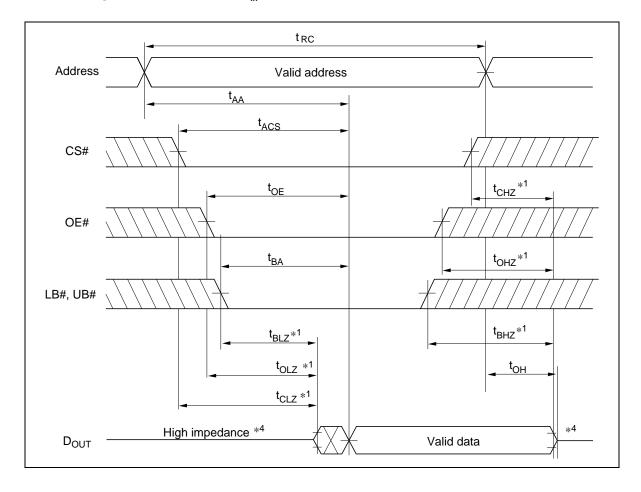


Read Timing Waveform (2) (WE# =  $V_{_{I\!H}},$  LB# =  $V_{_{I\!L}},$  UB# =  $V_{_{I\!L}})$ 

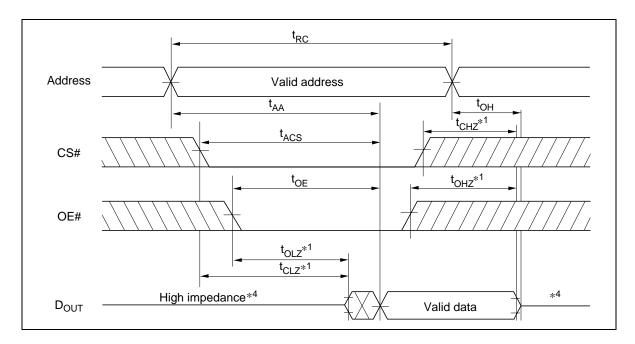


### Write Timing Waveform (1) (WE# Controlled)

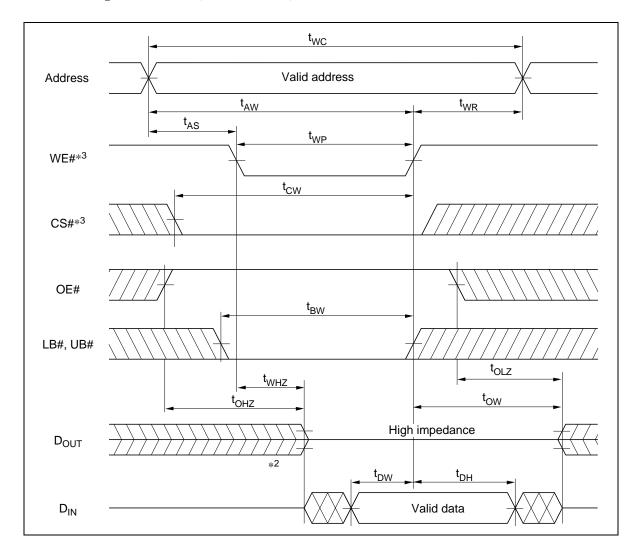

### Write Timing Waveform (2) (CS# Controlled)

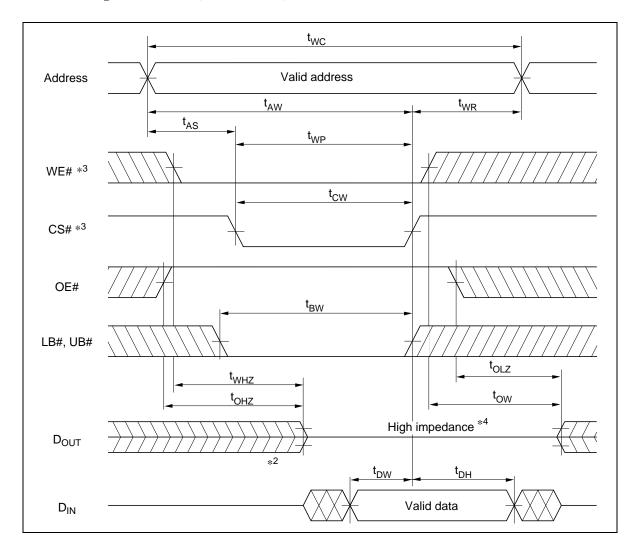

Write Timing Waveform (3) (LB#, UB# Controlled, OE# =  $V_{HH}$ )

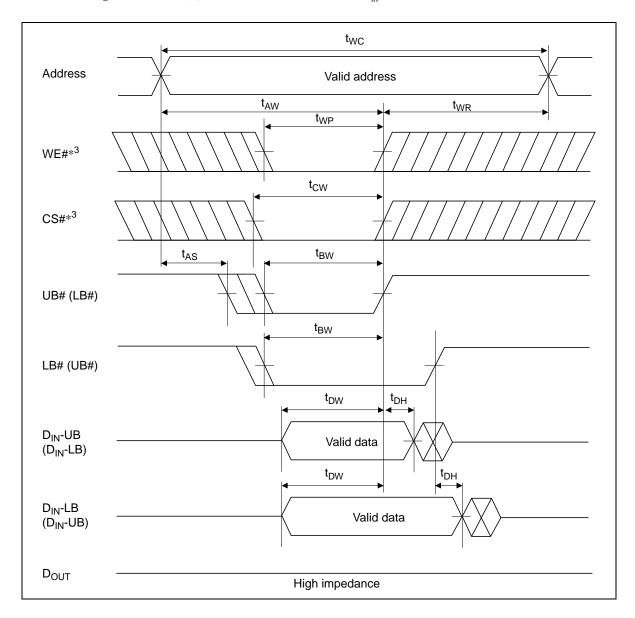

## **Revision History**

### **R1RP0416DI Series Data Sheet**

Rev.	Date	Contents of Modification		
		Page	Description	
0.01	Sep. 30, 2003	_	Initial issue	
1.00	Mar.12.2004	_	Deletion of Preliminary	

Renesas Technology Corp. Sales Strategic Planning Div. Nippon Bldg., 2-6-2, Ohte-machi, Chiyoda-ku, Tokyo 100-0004, Japan

Keep safety first in your circuit designs!

1. Renesas Technology Corp. puts the maximum effort into making semiconductor products better and more reliable, but there is always the possibility that trouble may occur with them. Trouble with semiconductors may lead to personal injury, fire or property damage.

Remember to give due consideration to safety when making your circuit designs, with appropriate measures such as (i) placement of substitutive, auxiliary circuits, (ii) use of nonflammable material or (iii) prevention against any malfunction or mishap.

Notes regarding these materials are intended as a reference to assist our customers in the selection of the Renesas Technology Corp. product best suited to the customer's application; they do not convey any license under any intellectual property rights, or any other rights, belonging to Renesas Technology Corp. or a third party.

2. Renesas Technology Corp. assumes no responsibility for any damage, or infringement of any third-party's rights, originating in the use of any product data, diagrams, charts, programs, algorithms, or circuit application examples contained in these materials.

3. All information contained in these materials, including product data, diagrams, charts, programs and algorithms represents information on products at the time of publication of these materials, and are subject to change by Renesas Technology Corp. without notice due to product improvements or other reasons. It is therefore recommended that customers contact Renesas Technology Corp. or an authorized Renesas Technology Corp. product distributor for the latest product information before purchasing a product listed herein.

- information before purchasing a product listed herein.
  The information described here may contain technical inaccuracies or typographical errors.
  Renesas Technology Corp. assumes no responsibility for any damage, liability, or other loss rising from these inaccuracies or errors.
  Please also pay attention to information published by Renesas Technology Corp. by various means, including the Renesas Technology Corp. Semiconductor
- Please also pay attention to information published by Renesás Technology Corp. by various means, including the Renesas Technology Corp. Semiconductor home page (http://www.renesas.com).

  4. When using any or all of the information contained in these materials, including product data, diagrams, charts, programs, and algorithms, please be sure to evaluate all information as a total system before making a final decision on the applicability of the information and products. Renesas Technology Corp. assumes no responsibility for any damage, liability or other loss resulting from the information contained herein.

  5. Renesas Technology Corp. semiconductors are not designed or manufactured for use in a device or system that is used under circumstances in which human life is potentially at stake. Please contact Renesas Technology Corp. or an authorized Renesas Technology Corp. product distributor when considering the use of a product contained herein for any specific purposes, such as apparatus or systems for transportation, vehicular, medical, aerospace, nuclear, or undersea repeater use.
- use.

  6. The prior written approval of Renesas Technology Corp. is necessary to reprint or reproduce in whole or in part these materials.

  7. If these products or technologies are subject to the Japanese export control restrictions, they must be exported under a license from the Japanese government and cannot be imported into a country other than the approved destination.

  Any diversion or reexport contrary to the export control laws and regulations of Japan and/or the country of destination is prohibited.

  8. Please contact Renesas Technology Corp. for further details on these materials or the products contained therein.



**RENESAS SALES OFFICES** http://www.renesas.com

Renesas Technology America, Inc.

450 Holger Way, San Jose, CA 95134-1368, U.S.A Tel: <1> (408) 382-7500 Fax: <1> (408) 382-7501

Renesas Technology Europe Limited.

Dukes Meadow, Millboard Road, Bourne End, Buckinghamshire, SL8 5FH, United Kingdom Tel: <44> (1628) 585 100, Fax: <44> (1628) 585 900

Renesas Technology Europe GmbH

Dornacher Str. 3, D-85622 Feldkirchen, Germany Tel: <49> (89) 380 70 0, Fax: <49> (89) 929 30 11

Renesas Technology Hong Kong Ltd. 7/F., North Tower, World Finance Centre, Harbour City, Canton Road, Hong Kong Tel: <852> 2265-6688, Fax: <852> 2375-6836

Renesas Technology Taiwan Co., Ltd. FL 10, #99, Fu-Hsing N. Rd., Taipei, Taiwan Tel: <886> (2) 2715-2888, Fax: <886> (2) 2713-2999

Renesas Technology (Shanghai) Co., Ltd. 26/F., Ruijin Building, No.205 Maoming Road (S), Shanghai 200020, China Tel: <86> (21) 6472-1001, Fax: <86> (21) 6415-2952

Renesas Technology Singapore Pte. Ltd. 1, Harbour Front Avenue, #06-10, Keppel Bay Tower, Singapore 098632

Tel: <65> 6213-0200, Fax: <65> 6278-8001

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for SRAM category:

Click to view products by Renesas manufacturer:

Other Similar products are found below:

5962-8855206XA CY6116A-35DMB CY7C128A-45DMB CY7C1461KV33-133AXI CY7C199-45LMB GS8161Z36DD-200I GS88237CB-200I R1QDA7236ABB-20IB0 RMLV0408EGSB-4S2#AA0 IS64WV3216BLL-15CTLA3 IS66WVE4M16ECLL-70BLI PCF8570P K6T4008C1B-GB70 CY7C1353S-100AXC AS6C8016-55BIN AS7C164A-15PCN 515712X IS62WV51216EBLL-45BLI IS63WV1288DBLL-10HLI IS66WVE2M16ECLL-70BLI 47L16-E/SN IS66WVE4M16EALL-70BLI IS62WV6416DBLL-45BLI IS61WV102416DBLL-10TLI CY7C1381KV33-100AXC CY7C1381KV33-100BZXI CY7C1373KV33-100AXC CY7C1381KVE33-133AXI CY7C4042KV13-933FCXC 8602501XA 5962-8829425MUA 5962-8855206YA 5962-8866201XA 5962-8866201YA 5962-8866204TA 5962-8866206MA 5962-8866207NA 5962-8866208UA 5962-8872502XA 5962-8959836MZA 5962-8959841MZA 5962-9062007MXA 5962-9161705MXA N08L63W2AB7I 7130LA100PDG GS81284Z36B-250I M38510/28902BVA IS62WV12816ALL-70BLI 5962-8971203XA 5962-8971203ZA