



# STANDARD 4 KEYPAD



**APEM**

## 1+4 MATRIX KEYPAD WITH INSERT POCKET

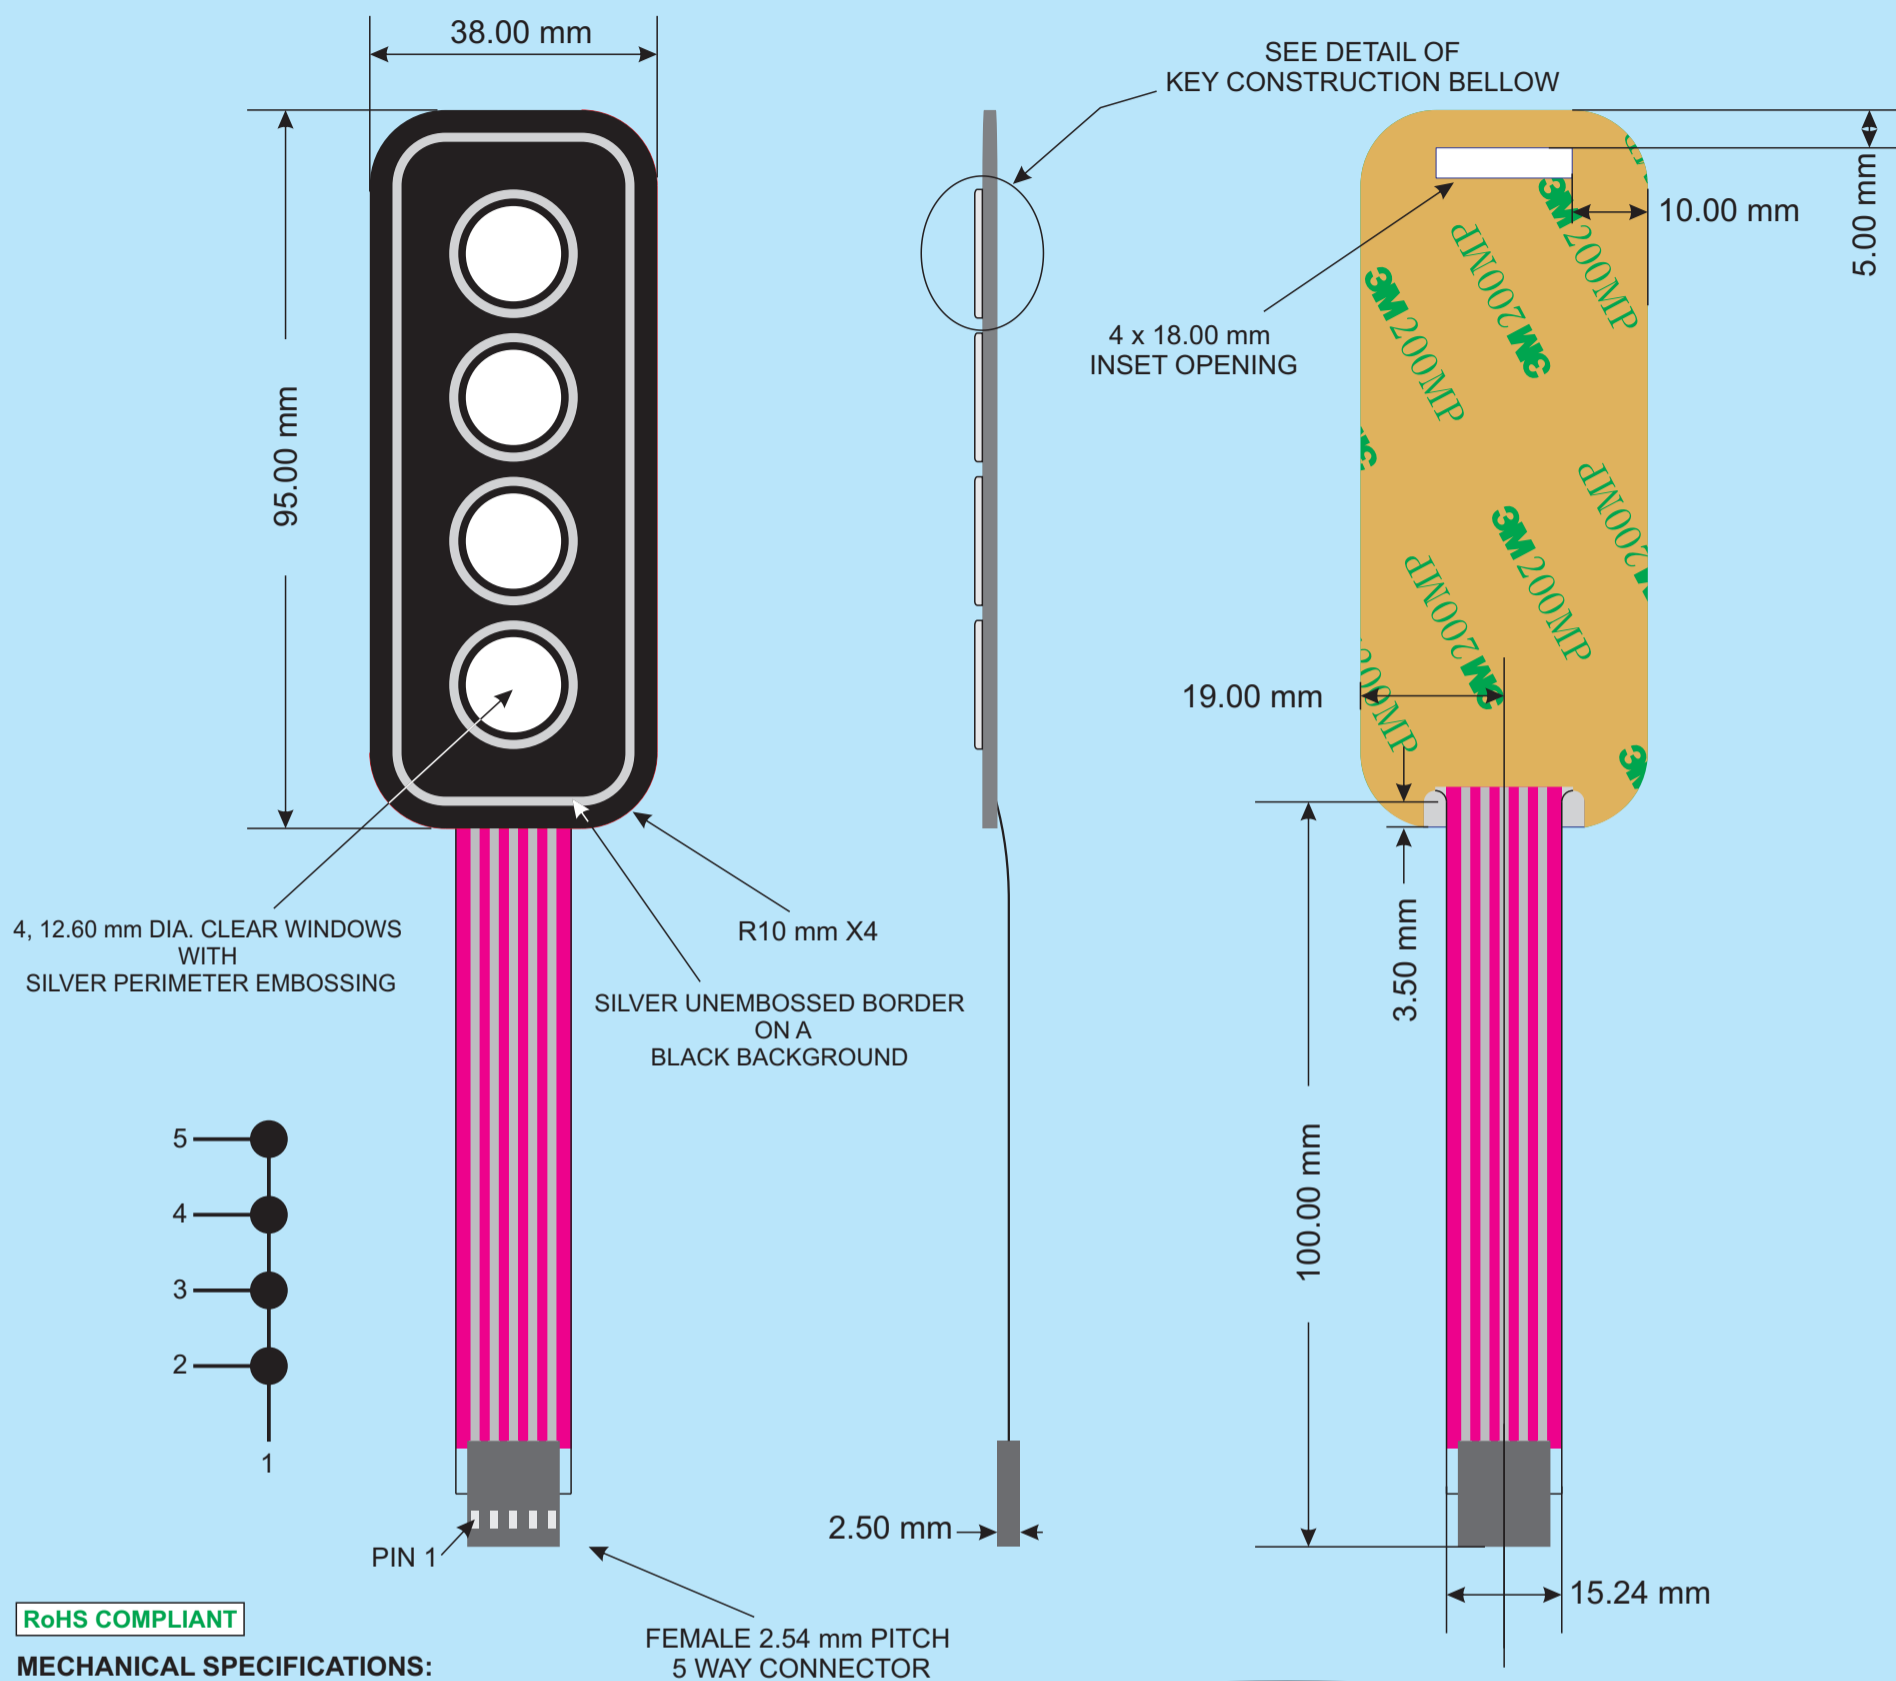

**RoHS COMPLIANT**

### MECHANICAL SPECIFICATIONS:


CONTACT FORCE 400 grams.  
TRAVEL 0.80 TO 0.90 mm.

### ELECTRICAL SPECIFICATIONS:


CONTACT VOLTAGE RATING 30V (dc).  
CONTACT CURRENT RATING 100mA.  
INSULATION RESISTANCE AT 100 V >100 Mohms.  
DIELECTRIC STRENGTH 250 V rms.  
CAPACITANCE 10 pF typ.  
CONTACT BOUNCE BELOW 10 msec. typ.

### ENVIRONMENTAL SPECIFICATIONS:

OPERATING TEMPERATURE -30 TO +55 C.  
STORAGE TEMPERATURE -40 TO +60 C.

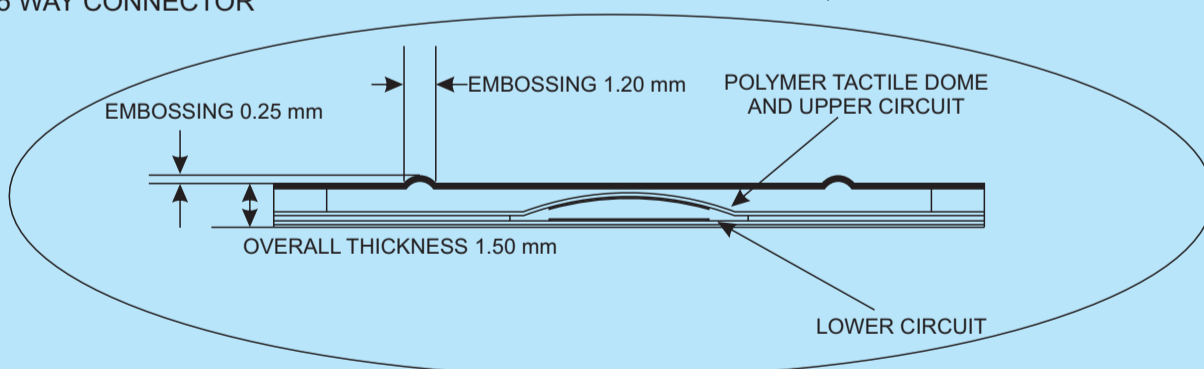

2 INSERTS WITH BLACK GRAPHICS ON A SILVER BACKGROUND SUPPLIED WITH THIS KEYPAD.  
FOR OTHER VARIANTS OF INSERTS PLEASE CALL APEM

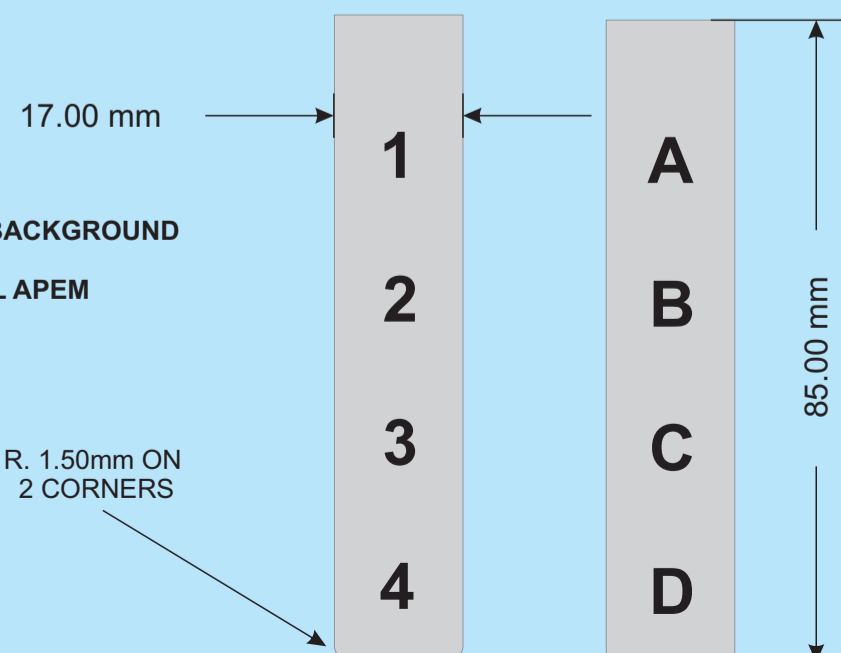

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [apem](#) manufacturer:*

Other Similar products are found below :

[48](#) [TW11GRY1](#) [SLB13814](#) [SLC120025](#) [DA04T](#) [Q6F1CXXB24](#) [SLG12004](#) [SLB1281R5](#) [DPL-02](#) [DA08](#) [5D15F1534](#) [M11L0A1M](#)  
[M11L0B1M](#) [M21L0E1C](#) [M31L0M1M](#) [CW-A0BK1A00A0](#) [MAB6B](#) [A019101](#) [A019305](#) [A019409](#) [A029301](#) [A1PCA0X106J103](#)  
[Q16F1BXXR12E](#) [Q22F1BXXY12E](#) [Q22F1CXXB24E](#) [Q22F1CXXG12E](#) [Q8P1BXXY110E](#) [Q8P3BXXG12E](#) [Q8P7BZZRYG12E](#)  
[Q8R3BXXG02E](#) [121442RA](#) [HF-33S10](#) [HF44R11](#) [HF45R10](#) [HFX44S00](#) [DMR10](#) [DSR04T](#) [AV0830C900](#) [AV19810KMZB](#) [MSS22](#)  
[BD150A01RE0000](#) [BD150D02BK1200](#) [HS1T24GA](#) [1D09034](#) [1Z03](#) [1ZZ](#) [NZAA0477](#) [NZAA1475](#) [NZAB1475](#) [NZAB1477](#)