# Power Transistor (-100V, -2A) 2SB1316

#### Features

- 1) Darlington connection for high DC current gain.
- 2) Built-in resistor between base and emitter.
- 3) Built-in damper diode.
- 4) Complements the 2SD2195 / 2SD1980.

#### Absolute maximum ratings (Ta = 25°C) Symb Collector-base voltage Collector-emitter voltage Emitter-base voltage Vcbo Vceo Vebo -100 V -100 tage A(DC) Collector current lc A(Pulse) \*1 Collector 2SB1580 w \*2 power dissipation 2SB1316 Pc 10 W(Tc=25°C) Junction temperature Ti 150 °C -55 Storage temperature Tstg to +150


\*1 Single pulse Pw=100ms
 \*2 When mounted on a 40 x 40 x 0.7 mm ceramic board

#### Packaging specifications and hFE

Туре	2SB1580	2SB1316	
Package	MPT3	CPT3	
hfe	1k to 10k	1k to 10k	
Marking	BN*	-	
Code	T100	TL	
Basic ordering unit (pieces)	1000	2500	

\* Denotes hre

#### Equivalent circuit




#### •Electrical characteristics (Ta = 25°C)

Parameter	Symbol	Min.	Тур.	Max.	Unit	Conditions	
Collector-base breakdown voltage	ВVсво	-100	-	-	V	$Ic = -50\mu A$	
Collector-emitter breakdown voltage	BVCEO	-100	-	-	V	Ic = -5mA	
Emitter-base breakdown voltage	BVEBO	-10	-	-	V	$I_E = -5mA$	
Collector cutoff current	Ісво	-	-	-10	μΑ	$V_{CB} = -100V$	
Emitter cutoff current	<b>I</b> EBO	-	-	-3	mA	$V_{EB} = -7V$	
Collector-emitter saturation voltage	VCE(sat)	-	-	-1.5	V	Ic/IB=-1A/-1mA	*
DC current transfer ratio	hfe	1000	-	10000	-	$V_{CE} = -2V$ , $I_C = -1A$	*
Transition frequency	f⊤	-	50	-	MHz	$V_{CE} = -5V$ , $I_E = 0.1A$ , $f = 30MHz$	
Output capacitance	Cob	-	35	-	pF	$V_{CB} = -10V$ , $I_E = 0A$ , $f = 1MHz$	

\*Measured using pulse current.



#### •External dimensions (Unit : mm)

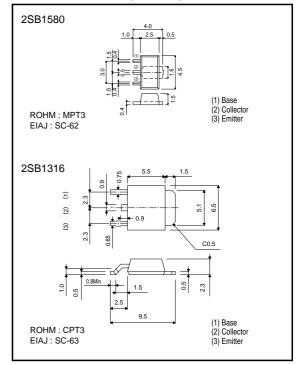

Rev.A 1/2

### Transistors

#### •Electrical characteristics curve




Fig.1 Grounded emitter output characteristics




Fig.2 Grounded emitter propagation characteristics




Fig.3 DC current gain vs. collector current




Fig.4 Collector-emitter saturation voltage vs. collector current




Fig.5 Collector output capacitance vs. collector-base voltage





Fig.6 Safe Operating area (2SB1580)



ROHM

	Notes
	or reproduction of this document, in part or in whole, is permitted without the ROHM Co.,Ltd.
The conten	t specified herein is subject to change for improvement without notice.
"Products")	t specified herein is for the purpose of introducing ROHM's products (hereinafte . If you wish to use any such Product, please be sure to refer to the specifications be obtained from ROHM upon request.
illustrate th	of application circuits, circuit constants and any other information contained herein e standard usage and operations of the Products. The peripheral conditions mus to account when designing circuits for mass production.
However, s	was taken in ensuring the accuracy of the information specified in this document hould you incur any damage arising from any inaccuracy or misprint of sucl , ROHM shall bear no responsibility for such damage.
examples of implicitly, a other partie	al information specified herein is intended only to show the typical functions of and of application circuits for the Products. ROHM does not grant you, explicitly on ny license to use or exercise intellectual property or other rights held by ROHM and es. ROHM shall bear no responsibility whatsoever for any dispute arising from the technical information.
equipment	ts specified in this document are intended to be used with general-use electronic or devices (such as audio visual equipment, office-automation equipment, commu vices, electronic appliances and amusement devices).
The Produc	ts specified in this document are not designed to be radiation tolerant.
	M always makes efforts to enhance the quality and reliability of its Products, a y fail or malfunction for a variety of reasons.
against the failure of ar shall bear r	sure to implement in your equipment using the Products safety measures to guard possibility of physical injury, fire or any other damage caused in the event of the ny Product, such as derating, redundancy, fire control and fail-safe designs. ROHM to responsibility whatsoever for your use of any Product outside of the prescribed of in accordance with the instruction manual.
system whi may result instrument, fuel-control any of the F	ets are not designed or manufactured to be used with any equipment, device of ch requires an extremely high level of reliability the failure or malfunction of which in a direct threat to human life or create a risk of human injury (such as a medica transportation equipment, aerospace machinery, nuclear-reactor controller ler or other safety device). ROHM shall bear no responsibility in any way for use of Products for the above special purposes. If a Product is intended to be used for any al purpose, please contact a ROHM sales representative before purchasing.
be controlle	d to export or ship overseas any Product or technology specified herein that may ed under the Foreign Exchange and the Foreign Trade Law, you will be required to ense or permit under the Law.



Thank you for your accessing to ROHM product informations. More detail product informations and catalogs are available, please contact us.

ROHM Customer Support System

http://www.rohm.com/contact/

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Darlington Transistors category:

Click to view products by ROHM manufacturer:

Other Similar products are found below :

 NJVMJD128T4G
 281287X
 BDV64B
 NJVMJD117T4G
 LB1205-L-E
 2N6053
 MPSA14
 TIP140
 MPSA13
 TIP127L-BP
 2N6383

 ULN2003ACM/TR
 2N7371
 2N6058
 2N6051
 MJ2501
 MJ3001
 2SB1560
 2SB852KT146B
 2SD2560
 TIP112TU
 BCV27
 MMBTA13-TP

 MMSTA28T146
 NTE2557
 NJVNJD35N04T4G
 MPSA29-D26Z
 FJB102TM
 BCV46E6327HTSA1
 BSP61H6327XTSA1
 BU941ZPFI

 NTE2350
 NTE245
 NTE264
 NTE2649
 NTE46
 NTE98
 ULN2003ADR2G
 NTE2344
 NTE2405
 NTE243
 NTE244
 NTE247

 NTE248
 NTE253
 NTE2548
 NTE261
 NTE262
 NTE262
 NTE245
 NTE2548
 NTE261
 NTE262