

# RZ/G SERIES EMBEDDED MICROPROCESSORS

High-End Graphics, Video, Embedded Vision and More



**BIG IDEAS**  
FOR EVERY SPACE




# RZ/G SERIES MULTI-CORE MPUs FOR HIGH-END GRAPHICS, VIDEO, EMBEDDED VISION, AND MORE

RZ/G Series microprocessors (MPUs) enable rapid development of game-changing Linux, Android, and QNX-based embedded systems. Designed for use in industrial, home appliance, office, and medical equipment, the RZ/G Series extends the capabilities of the successful Renesas RZ/A Series MPUs to deliver high-end performance in applications such as graphics, multistream video, and embedded vision.

The RZ/G Series features up to 1.5 GHz CPUs, 3D graphics acceleration, 1080p@60fps H.264 video processing, and DDR3 memory interfaces, providing ample performance margin for highly differentiated Human-Machine Interface (HMI)-type applications. Other features include USB, PCIe, SATA, Fast Ethernet, and Gigabit Ethernet interfaces.

KEY FEATURES	KEY BENEFITS
World-class Imagination Technologies 3D graphics engine for image rendering, plus 1080p 60fps video codec	Enhance GUI expressiveness and add value to your end application with 3D graphics and real-time video
Arm® Cortex®-A7 and A15 CPU cores for power or performance optimization	Tune your design to minimize power dissipation or maximize performance to suit your specific requirements
Shared IP and memory map over entire RZ/G Series MPU lineup	Build scalable software with common device drivers
Rich ecosystem of design and system integration partners	Compress your development cycle by tapping into a growing network of RZ/G MPU design experts
RZ/G Linux Platform with super-long-term supported Civil Infrastructure Platform (CIP) Linux	Dramatically reduce risk and cost of implementing and maintaining industrial-grade Linux systems



**No Heat Sink with RZ/G1E**

R8A77450, R8A77470

**RZ/G1E, RZ/G1C**  
1 GHz Dual  
Arm Cortex-A7  
(3,800 DMIPS)

R8A77440

**RZ/G1N**  
1.5 GHz Dual  
Arm Cortex-A15  
(10,500 DMIPS)

R8A77430

**RZ/G1M**  
1.5 GHz Dual  
Arm Cortex-A15  
with 64b memory bus  
and enhanced graphics  
(10,500 DMIPS)

R8A77420

**RZ/G1H**  
1.4 GHz Quad  
Arm Cortex-A15 &  
780 MHz Quad  
ARM Cortex-A7  
(25,528 DMIPS)

**Performance Optimization**

**Shared IP for Software Scalability**


**Over 25,000 DMIPS with RZ/G1H**

**Power Savings**

# RZ/G LINUX PLATFORM WITH INDUSTRIAL-GRADE CIP LINUX REDUCES RISK AND COST OF OWNERSHIP

The Renesas RZ/G Linux Platform makes it easy to implement and maintain Industrial-Grade Linux in electronic equipment thanks to a unique software-design framework with Renesas' Verified Linux Package, advanced code verification and analysis tools, and cloud-build from within Renesas' e<sup>2</sup> studio development environment. The Verified Linux Package is built with Civil Infrastructure Platform (CIP) Linux with super long-term (10+ year) support for a given Linux kernel, which eliminates the need for costly upgrades.

The RZ/G Linux Platform enables users of all types to excel with Linux – from those upgrading from microcontrollers to MPUs who don't want to deal with setting up a Linux server of their own, to experts who are already accustomed to a manual Yocto build process. <https://www.cip-project.org/>

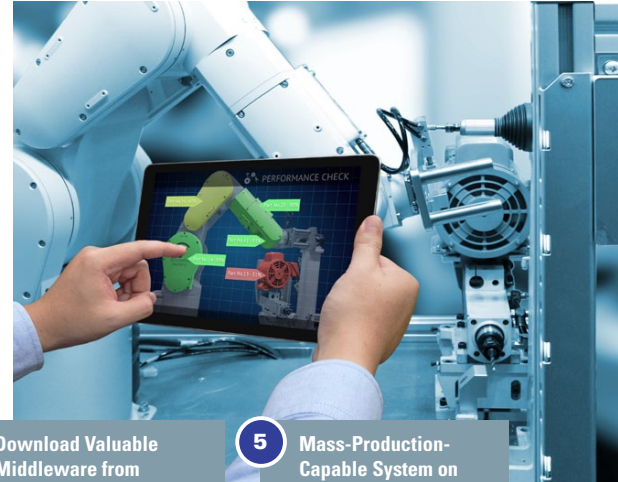

**1 RZ/G Processor**

- RZ/G processor with multimedia functions and security

**2 One-Package Software Framework**

- Verified Linux Package

GUI framework

H-264 Codec
OpenGL
Security

Linux

**3 Linux Development and Verification Provided in the Cloud**

- Verification and Analysis tools
- Cloud-build from within Renesas e<sup>2</sup> studio

**4 Download Valuable Middleware from Renesas Marketplace**

- Verified middleware and software add-ons

**5 Mass-Production-Capable System on Module (SoMs)**

- Mass-production-ready SoMs and prototyping kits

## High-Performance Processing with Support for 3D Graphics and Full HD Video

	RZ/G1C R8A77470	RZ/G1E R8A77450	RZ/G1N R8A77440	RZ/G1M R8A77430	RZ/G1H R8A77420
Core	Dual Cortex-A7	Dual Cortex-A7	Dual Cortex-A15	Dual Cortex-A15	Quad Cortex-A15 Quad Cortex-A7
Operating Frequency	1.0 GHz	1.0 GHz	1.5 GHz	1.5 GHz	1.4 GHz 780 MHz
Processing Performance	3,800 DMIPS	3,800 DMIPS	10,500 DMIPS	10,500 DMIPS	25,528 DMIPS
Cache Size	L1 cache I/32 KB D/32 KB L2 cache 512 KB	L1 cache I/32 KB D/32 KB L2 cache 512 KB	L1 cache I/32 KB D/32 KB L2 cache 1 MB	L1 cache I/32 KB D/32 KB L2 cache 1 MB	L1 cache I/32 KB D/32 KB L2 cache 2 MB (A15) 512 KB (A7) S3 cache 2 MB
MMU	Yes				
NEON/VFP	SIMDv2/VFPv4				
3D Graphics	SGX531, 260 Mpx/s	SGX540, 520 Mpx/s	SGX544MP2, 1240 Mpx/s	SGX544MP2, 2080 Mpx/s	SG6400, 4160 Mpx/s
Video Functions	2 ch digital video inputs	2 ch digital video inputs	3 ch digital video inputs		4 ch digital video inputs
	2 ch RGB video display interfaces	2 ch RGB video display interfaces	1 ch RGB video display interface		
	1 ch analog input		1 ch LVDS video output		
	H.264 – 1920x1080 @ 60 x 1 ch				H.264 – 1920x1080 @ 60 x 2 ch
Video image processing functions, including color conversion and scaling					





# RZ/G SERIES MULTI-CORE MPU<sub>s</sub>

## BIG IDEAS FOR EVERY SPACE

### WITH RZ/G MPU<sub>s</sub>

#### Human Machine Interface (HMI)

Create winning human machine interface solutions for building and office automation, healthcare, and industrial markets with RZ/G MPUs. Take advantage of the multitude of graphics and multimedia examples to get your prototypes up and running quickly and to get to market early.

#### EtherCAT Master with HMI for Industrial Automation

RZ/G1E with EtherCAT Master stack from partner, Acontis GmbH, is ideal for industrial PCs, HMI master devices, and motion controllers, especially when combined with Renesas RZ/T EtherCat slave devices.











**EtherCAT Master Applications for Industrial Automation**

**3D Rendering for Medical Imaging**


**High-End Human Machine Interface Displays**

#### Prototyping Kits and Production-Ready SoMs Available Through Renesas Partners

iWave Systems	emtrion GmbH	Mistral Solutions
 <p>RZ/G1C SBC</p>  <p>RZ/G1E SoDIMM</p>  <p>RZ/G1N &amp; M Qseven<sup>®</sup> SoM</p>  <p>RZ/G1H Qseven SoM</p>	 <p>RZ/G1E emCON module</p>  <p>RZ/G1M emCON module</p>  <p>RZ/G emCON module with carrier board and LCD screen</p>	 <p>RZ/G1E SMARC module with carrier board</p>

## Embedded Vision

Embedded vision and AI are areas of growing interest today as they hold huge promise to revolutionize human-to-machine and machine-to-machine interaction. Renesas is ideally positioned to enable this capability in products with a range of examples, created in conjunction with our software partners, for face recognition, object identification, optical flow, and more.

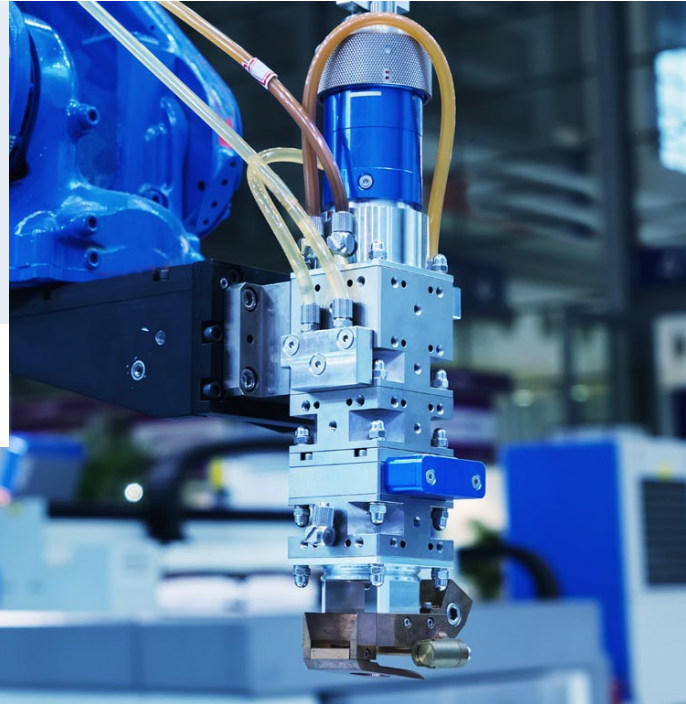

**Embedded Vision (e.g., Gesture, Face, and Object Recognition)**



**Networked Video Camera Systems**



**2-Way Video Telephony**

## Renesas Marketplace for Verified Software Add-Ons


The online Renesas Marketplace connects product developers to value-adding Renesas partners, enabling developers to immediately bring to life RZ/G silicon with leading software solutions, including embedded vision, EtherCAT, and fast-boot, among others.

U.S.: <https://mp.renesas.com/en-us/rzg/>

Europe: <https://mp.renesas.com/en-eu/rzg/>

Singapore: <https://mp.renesas.com/en-sg/rzg/>

Japan: <https://mp.renesas.com/ja-jp/rzg/>

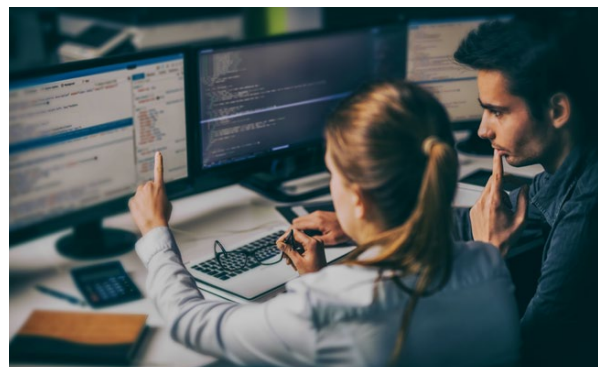



# RZ/G SERIES BLOCK DIAGRAMS

## RZ/G1E (R8A77450)

Bring huge value to your low-cost embedded design with over 3,800 Dhrystone (DMIPS) performance at a low power footprint via Arm's lowest power processor, the Cortex-A7, while enjoying dual Ethernet, 3D graphics, and a 1080p60 H.264 video codec.

## RZ/G1C (R8A77470)

*(block diagram not shown)*

Keep BOM costs down with a 4-layer PCB and no need for a PMIC. With a dual-core, 3,800 DMIPS Arm Cortex-A7 processor, you can build brilliant HMI systems with accelerated graphics from a PowerVR SGX531 3D GPU and a 1080p60 H.264 video codec. Available in a FX-BGA2121-501 package.



## RZ/G1M (R8A77430)

Take your high-end MPU design to the next level with over 10,000 DMIPS performance from two Arm Cortex-A15 cores; USB 3.0, SATA and PCIe interfaces; 3D graphics; a 1080p60 H.264 video codec; and a 64-bit wide external DDR3 SDRAM bus to deliver immense memory bandwidth and an incredible end-user experience.

1 USB 3.0 and SATA0 share same PHY.

2 PCIe and SATA1 share same PHY.

3 Ethernet AVB and 10/100 Ethernet share the same pins.

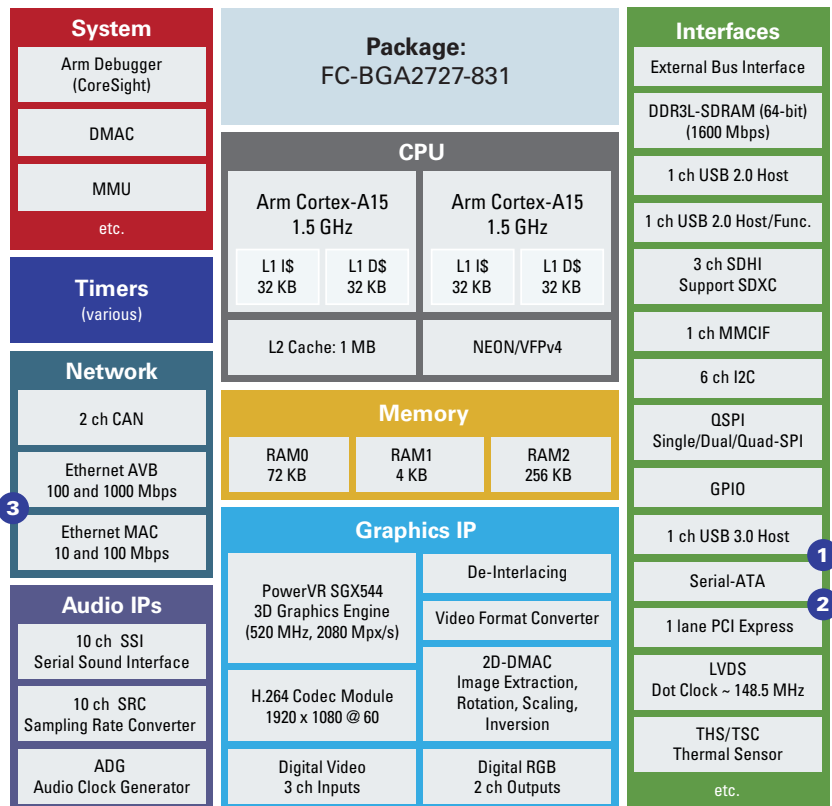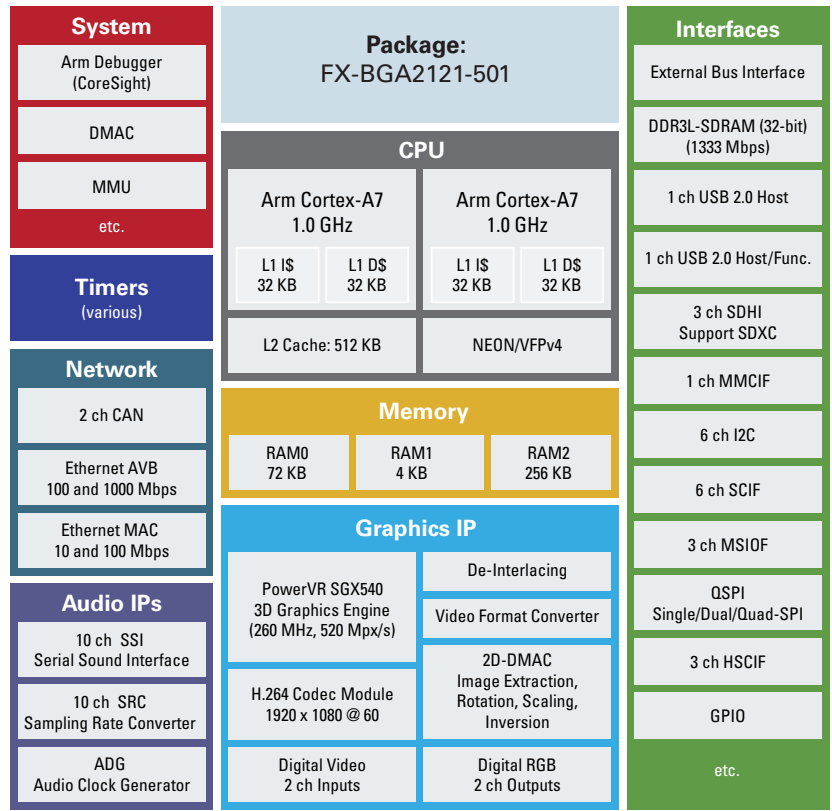

<b>System</b>	<b>Package:</b> FC-BGA2727-831		<b>Interfaces</b>	
Arm Debugger (CoreSight)	<b>CPU</b>		External Bus Interface	
DMAC			DDR3L-SDRAM (32-bit)(1600 Mbps)	
MMU	Arm Cortex-A15 1.5 GHz	Arm Cortex-A15 1.5 GHz	1 ch USB 2.0 Host	
etc.	L1 I\$ 32 KB	L1 D\$ 32 KB	1 ch USB 2.0 Host/Func.	
<b>Timers</b> (various)	L2 Cache: 1 MB	NEON/VFPv4	3 ch SDHI Support SDXC	
<b>Network</b>	<b>Memory</b>		1 ch MMCIF	
2 ch CAN	RAM0 72 KB	RAM1 4 KB	6 ch I2C	
Ethernet AVB 100 and 1000 Mbps	<b>Graphics IP</b>		QSPI Single/Dual/Quad-SPI	
Ethernet MAC 10 and 100 Mbps			PowerVR SGX544 3D Graphics Engine (312 MHz, 1240 Mpx/s)	De-Interlacing
<b>Audio IPs</b>	H.264 Codec Module 1920 x 1080 @ 60	2D-DMAC Image Extraction, Rotation, Scaling, Inversion	1 ch USB 3.0 Host	
10 ch SSI Serial Sound Interface	Digital Video 3 ch Inputs	Digital RGB 2 ch Outputs	Serial-ATA <b>1</b>	
10 ch SRC Sampling Rate Converter	<b>Audio Clock Generator</b>		1 lane PCI Express	
ADG			LVDS Dot Clock ~ 148.5 MHz	
Audio Clock Generator	<b>Audio Clock Generator</b>		THS/TSC Thermal Sensor	
etc.			etc.	

### RZ/G1N (R8A77440)

Leverage a rich set of high-end embedded capabilities with 10,500 DMIPS from two Arm Cortex-A15 CPUs; a USB 3.0, SATA or PCIe interface; a 3D graphics engine; and a 1080p60 H.264 video codec to propel your application beyond the reach of your competition.

- 1** USB 3.0, SATA and PCIe share same PHY.
- 2** Ethernet AVB and 10/100 Ethernet share the same pins.

<b>System</b>	<b>Package:</b> FC-BGA2727-831		<b>Interfaces</b>	
Arm Debugger (CoreSight)	<b>CPU</b>		External Bus Interface	
DMAC			DDR3L-SDRAM (64-bit) (1600 Mbps)	
MMU	Arm Cortex-A15 1.4 GHz	Arm Cortex-A7 780 MHz	2 ch USB 2.0 Host	
S3 Cache: 2 MB	L1 I\$ 32 KB	L1 D\$ 32 KB	1 ch USB 2.0 Host/Func.	
etc.	L2 Cache: 2 MB	L2 Cache: 512 KB	4 ch SDHI Support SDXC	
<b>Timers</b> (various)	NEON/VFPv4	NEON/VFPv4	2 ch MMCIF	
<b>Network</b>	<b>Memory</b>		4 ch I2C	
2 ch CAN	RAM0 72 KB	RAM1 4 KB	QSPI Single/Dual/Quad-SPI	
Ethernet AVB 100 and 1000 Mbps	<b>Graphics IP</b>		GPIO	
Ethernet MAC 10 and 100 Mbps			PowerVR G6400 3D Graphics Engine (520 MHz, 4,160 Mpx/s)	3 ch De-Interlacing
<b>Audio IPs</b>	H.264 Codec Module 1920 x 1080 @ 60 (2 ch)	2D-DMAC Image Extraction, Rotation, Scaling, Inversion	Serial-ATA <b>1</b>	
10 ch SSI Serial Sound Interface	Digital Video 4 ch Inputs	Digital RGB 2 ch Outputs (plus 2 ch LVDS Outputs)	1 lane PCI Express <b>2</b>	
10 ch SRC Sampling Rate Converter	<b>Audio Clock Generator</b>		2 ch LVDS Dot Clock ~ 148.5 MHz	
ADG			THS/TSC Thermal Sensor	
Audio Clock Generator	<b>Audio Clock Generator</b>		etc.	
etc.			etc.	

### RZ/G1H (R8A77420)

Harness the ultimate in embedded MPU performance with this 8-core "Big-Little" quad Arm Cortex-A15 and quad Arm Cortex-A7 based MPU that delivers over 25,000 DMIPS; USB 3.0, SATA and PCIe interfaces; ultra high-end 3D graphics with two-channel 1080p60 H.264 codecs; and a 64-bit wide DDR3 SDRAM memory bus.

- 1** USB 3.0 and SATA0 share same PHY.
- 2** PCIe and SATA1 share same PHY.
- 3** Ethernet AVB and 10/100 Ethernet share the same pins.

# RZ/G EXTENDS RENESAS RZ MPU FAMILY WITH 3D GRAPHICS, H.264 VIDEO CODEC, AND HIGH-PERFORMANCE DDR3 MEMORY INTERFACES

## Software Development Environment



## Partners & Affiliations

### Design Services



### System-on-Module (SoM) and Design Services




### Graphics



### Embedded Vision




## Evaluation Kits

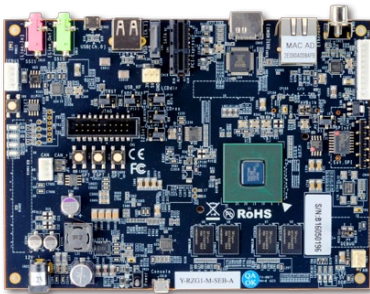

**RZ/G1M Starter Kit**  
Part No.: YR8A77430S000BE

[www.renesas.com/en-us/products/microcontrollers-microprocessors/rz.html](http://www.renesas.com/en-us/products/microcontrollers-microprocessors/rz.html)



**RZ/G1E Starter Kit**  
Part No.: YR8A77450S000BE

Various partner kits and SoMs also available through iWave Systems, emtrion embedded systems, Mistral Solutions and others

## Renesas MCU Ecosystem



Consultant and tool vendor network  
[www.renesas.com/Alliance](http://www.renesas.com/Alliance)



Customized updates  
[www.renesas.com/MyRenesas](http://www.renesas.com/MyRenesas)



University program  
[www.renesas.com/University](http://www.renesas.com/University)

Renesas *Rulz*.com



Online training  
[www.RenesasInteractive.com](http://www.RenesasInteractive.com)

**Software Library** *Free SW*  
[www.renesas.com/softwarelibrary](http://www.renesas.com/softwarelibrary)

**Free Samples**  
[www.renesas.com/samples](http://www.renesas.com/samples)

**Technical Support**  
[www.renesas.com/tech\\_support](http://www.renesas.com/tech_support)

© 2017 Renesas Electronics America Inc. (REA). All rights reserved. Cortex is a registered trademark of Arm, Ltd., CoreMark is a trademark of EEMBC. All other trademarks are the property of their respective owners. REA believes the information herein was accurate when given but assumes no risk as to its quality or use. All information is provided as-is without warranties of any kind, whether express, implied, statutory, or arising from course of dealing, usage, or trade practice, including without limitation as to merchantability, fitness for a particular purpose, or non-infringement. REA shall not be liable for any direct, indirect, special, consequential, incidental, or other damages whatsoever, arising from use of or reliance on the information herein, even if advised of the possibility of such damages. REA reserves the right, without notice, to discontinue products or make changes to the design or specifications of its products or other information herein. All contents are protected by U.S. and international copyright laws. Except as specifically permitted herein, no portion of this material may be reproduced in any form, or by any means, without prior written permission from Renesas Electronics America Inc. Visitors or users are not permitted to modify, distribute, publish, transmit or create derivative works of any of this material for any public or commercial purposes.



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Development Boards & Kits - ARM category](#):*

*Click to view products by [Renesas manufacturer](#):*

Other Similar products are found below :

[CWH-CTP-VSPA-YE](#) [CY4541](#) [EVAL-ADUCM320IQSPZ](#) [FRDM-KV31F](#) [POLYPOD-BGA324](#) [POLYPOD-TQ144](#) [POLYPOD-TQ176](#)  
[KEA128LEDLIGHTRD](#) [KIT\\_XMC42\\_EE1\\_001](#) [SAFETI-HSK-RM48](#) [LS1024A-RDB](#) [ADM00573](#) [FRDM-KL28Z](#) [PICOHOBBITFL](#)  
[MCIMX53-START-R](#) [TWR-K65F180M](#) [KEA128BLDCRD](#) [CC-ACC-MMK-2443](#) [STM8L1528-EVAL](#) [YSPKS5D9E10](#) [YGRPEACHFULL](#)  
[TWR-MC-FRDMKE02Z](#) [TWR-K80F150M](#) [CY14NVSRAMKIT-001](#) [EVALSPEAR320CPU](#) [EVB-DBSUB1586](#) [EVB-SCMIMX6SX](#)  
[MAXWSNENV#](#) [FM0-64L-S6E1C3](#) [MAX32600-KIT#](#) [TMDX570LS04HDK](#) [Z32F3840100KITG](#) [LS1021A-IOT-B](#) [SK-FM3-100PMC-](#)  
[MB9BF516N](#) [TXSD-SV70](#) [YSTBS3A3E10](#) [YR8A77430HA02BG](#) [STM3240G-USB/NMF](#) [OM13080UL](#) [EVAL-ADUC7120QSPZ](#) [CYDP-](#)  
[KIT-13638](#) [OM13082UL](#) [OM13063UL](#) [ATAVRPARROT](#) [OM13090UL](#) [YSPEHMI1S20](#) [TXSD-SV71](#) [YGRPEACHNORMAL](#) [SK-FM3-](#)  
[176PMC-ETHERNET](#) [HVP-KV11Z75M](#)