



PRODUCT SPECIFICATION

PRODUCT: CERAMIC DISC CAPACITOR
SAFETY RECOGNIZED

TYPE: AC SERIES

CUSTOMER: _____

DOC. NO.: POE-D11-02-E-18

APPROVED BY CUSTOMER

VENDOR :

- WALSIN TECHNOLOGY CORPORATION**
566-1, KAO SHI ROAD, YANG-MEI
TAO-YUAN, TAIWAN
1. **PAN OVERSEAS (GUANGZHOU) ELECTRONIC CO.,LTD.**
NO.277,HONG MING ROAD,EASTERN SECTION,
GUANG ZHOU ECONOMIC AND TECHNOLOGY
DEVELOPMENT ZONE,CHINA
1. **DONGGUAN WALSIN TECHNOLOGY ELECTRONICS CO., LTD.**
NO.638, MEI JING WEST ROAD,XINIUPO,ADMINISTRATIVE
ZONE,DALANGTOWN,DONGGUAN CITY, GUANGDONG PROVINCE

MANUFACTURE SITE :

- PAN OVERSEAS (GUANGZHOU) ELECTRONIC CO.,LTD.**
NO.277,HONG MING ROAD,EASTERN SECTION,
GUANG ZHOU ECONOMIC AND TECHNOLOGY
DEVELOPMENT ZONE,CHINA
- DONGGUAN WALSIN TECHNOLOGY ELECTRONICS CO., LTD.**
NO.638, MEI JING WEST ROAD,XINIUPO,ADMINISTRATIVE
ZONE,DALANGTOWN,DONGGUAN CITY, GUANGDONG PROVINCE



		POE-D11-02-E-18
CERAMIC DISC CAPACITOR SAFETY RECOGNIZED, AC SERIES	Ver : 18	Page: 2 / 20

Record of change

Date	Version	Description	page
2008.6.3	1	1. C23-00-C-01(before) → POE-C11-00-C-01(1 st edition)	
2008.8.22	2	1 Complete lead code	20
		2. Add last SAP code “ H” for halogen and Pb free , epoxy resin..	3
2008.12.12	3	1.Complete the 13 th to 17 th codes of SAP P/N.	4
		2. Page layout adjustment.	
2009.7.16	4	1 Change PSA & POE logo to Walsin & POE logo.	9
		2.Complete Marking statement.	11
		3. Revised standard NO. of SEV, SEMKO, FIMKO, NEMKO, DEMKO and KEMA. Revised recognized NO. of FIMKO, NEMKO, DEMKO ,KEMA and CQC.	
		4. Downsize :	6
2009.9.14	5	1. “Protrusion length”: “+0.5 to-1.0” revised to “2.0max (Or the end of lead wire may be inside the tape.)”	9
2009.12.24	6	1. Marking	10
		2. Correct recognized No	11
		3. Revised the Figure of impulse voltage test(Item 7.3.14) according to the standard IEC 60384-14 ed.3	14
2011/1/13	7	1. Review SAP P/N about diameter code:	6
		2. Delete “AT” taping type.	4,5,8,9
		3. Add test item “Temperature Cycle ”.	15
		4. Add item 10 “Drawing of internal structure and material list”	20
2011/4/27	8	1. Add “1AC” type;	4
		2. Delete “old P/N”	6
		3. Define the marking of the type “0AC” and “1AC”;	8
		4. Review the “Standard No. & Subclass & W.V. & Recognized No”.	9
2012/2/7	9	1. Review the “Standard No. & Subclass & W.V. & Recognized No”.	9
		2. Review the “Operating Temperature Range” from “-25 to +125°C” to “-40 to +125°C”	10
		3. Review the temperature of Step 1from “-25+0/-3” to “-40+0/-3”	14
2012/4/6	10	1. In order to improve the traceability of the product, change the date code on capacitor body, new date code can trace back to production “Lot No.”	8
2013/5/6	11	1. Review the Lead diameter ϕ from 0.60 +0.1/-0.05mm to 0.55+/-0.05mm	5,6,7
		2. In order the customer to know the round time of manufacture, review the date code on capacitor body, new date code can know the month of manufacture.	8
		3. Delete “No marked with “ _” stand for Pb free”. Add “epoxy resin”	8
		4. Review the Solderability time from 2±0.5s to 5±0.5s	11
2013/10/16	12	1. Review the “Manufactured Date” to “Products ID” on the marking page	8
		2. Delete “The marking can be printed on either one side or two side of coating body. “and add “for SAP part number 10-11 digits ≤ ‘07’ products” to two sides and “for SAP part number 11-12 digits ≥ ‘08 ’ products” to one side.	8

Record of change (continue)

Date	Version	Description	page
2014/11/5	13	1. Review the terminal position of the lead wire.	8
		2. Review the product of ID, add the code "D" for the products of Dongguan Walsin Technology Electronics Co., Ltd.	9
		3. Review the minimum packing quantity of taping code AM.	16
2014/12/25	14	1. Add"3.1Normal parts&3.2 special for surge parts" for "3. Part numbering/T.C/Capacitance/ Tolerance/Diameter"	7
2015/5/27	15	Add the X1:440Vac/Y2:300Vac safety approval for CQC.	4,10
2015/8/4	16	Delete the H(Inside kink lead)	5,8
2015/11/12	17	1. Review the normal parts of Taping type	6,7
		2. Review Marking	9
2016/1/27	18	1. Review the Available lead code of Lead Configuration	5
		2. Revised standard NO. of VDE, SEV, SEMKO, FIMKO, NEMKO, DEMKO and KTL.	10

Table of Contents

No.	Item	Page
1	Part number for SAP system	4
2	Mechanical	5
3	Part numbering/T.C/Capacitance/ Tolerance/Diameter	6
4	Taping Format	8
5	Marking	9
6	Scope	10
7	Specification and test method	11~15
8	Packing specification	16
9	Notices	17~19
10	Drawing of Internal Structure and material list	20

1. Part number for SAP system

(Ex.) **YV 0 AC 472 M 10 0 L 20 C 7 H**
 (1) (2)-1 (2)-2 (3) (4) (5) (6) (7) (8) (9) (10) (11)

(1)Temperature characteristic (identified code)

CODE	CH(NP0)	SL	YP (Y5P)	YV(Y5V)	YU (Y5U)
Cap. Change	0±60PPM/°C	-1000~+350PPM/°C (+20°C~+85°C)	±10%	-80% ~ +30%	-55% to +20%

(2)-1 Rated voltage(identified by 1-figure code) : 0 = X1:400Vac/Y2:250Vac; 1 = X1:440Vac/Y2:300Vac (Only Approval by VDE/ENEC/UL/CSA/CQC, marking VDE/ENEC)

(2)-2 Type(identified by 2-figure code): AC

(3)Capacitance (identified by 3-figure code) : EX.221=220pF

(4)Capacitance tolerance (identified by code) : C:±0.25pF,D:±0.5pF,J:±5%,K:±10%,M:±20%

(5)Nominal body diameter dimension (identified by 2-figure code) : 06--Dmax7.0mm, 07--Dmax8.0mm...

(6)Internal code: 0--Normal, other code--Special control

(7)Lead Style : Refer to “2. Mechanical”.

(8)Packing mode and lead length (identified by 2-figure code)

Taping Code	Description
AF	Ammo box and product pitch : 15.0 mm
AM	Ammo box and product pitch : 25.4 mm

Bulk Code	Description
3E	Lead length : 3.5mm
04	Lead length : 4.0mm
4E	Lead length : 4.5mm
20	Lead length : 20.0mm

(9) Tolerance of lead length

Code	Description
A	±0.5 mm (only for kink lead type)
B	±1.0 mm
C	Min.
D	Taping special purpose

(10)Lead space

Code	Description
7	7.5±1.0 mm
M	7.5±0.5 mm
0	10±1.0 mm
A	10±0.5 mm

(11)Epoxy resin code

Code	Description
B	Pb free, Epoxy Resin
H	Halogen and Pb free , epoxy resin.

2. Mechanical

Encapsulation : Epoxy resin, flammability UL94 V-0

Available lead code(unit: mm)

Lead type	SAP P/N (13-17)digits	Lead space (F)	Lead Length (L)	Packing	Lead Configuration
Lead style : L Type L Straight long lead	L20C7	7.5 ± 1.0	20 min.	Bulk	
	L20C0	10 ± 1.0	20 min.		
Lead style : B Type B Straight long lead	BAFD7	Refer to "4. Taping format"		Tap. Ammo	
	BAMD7				
	BAMD0				
Lead style : L Type L Straight short lead	L03B7	7.5 ± 1.0	3.0 ± 1.0	Bulk	
	L4EB7	7.5 ± 1.0	4.5 ± 1.0		
	L05B7	7.5 ± 1.0	5.0 ± 1.0		
	L03B0	10 ± 1.0	3.0 ± 1.0		
	L4EB0	10 ± 1.0	4.5 ± 1.0		
	L05B0	10 ± 1.0	5.0 ± 1.0		
Lead style : D Type D Vertical kink lead	D3EA7	7.5 ± 1.0	3.5 ± 0.5	Bulk	
	D04A7	7.5 ± 1.0	4.0 ± 0.5		
	D3EA0	10 ± 1.0	3.5 ± 0.5		
	D04A0	10 ± 1.0	4.0 ± 0.5	Tap. Ammo	
	DAFD7	Refer to "4. Taping format"			
	DAMD7				
	DAMD0				
Lead style : X Type X Outside kink lead	X3EA7			7.5 ± 1.0	3.5 ± 0.5
	X04A7	7.5 ± 1.0	4.0 ± 0.5		
	X05B7	7.5 ± 1.0	5.0 ± 1.0		
	X3EA0	10 ± 1.0	3.5 ± 0.5		
	X04A0	10 ± 1.0	4.0 ± 0.5		
	X05B0	10 ± 1.0	5.0 ± 1.0		
	XAFD7	Refer to "4. Taping format"		Tap. Ammo	
	XAMD7				
XAMD0					

* Lead diameter Φd: 0.55±/-0.05mm

 * e (Coating **extension** on leads): 3.0mmMax for straight lead style; Not exceed the kink for kink lead.

3. Part numbering/T.C/Capacitance/ Tolerance/Diameter :
3.1 Normal parts:

SAP Part. No.	T.C.	Capacitance	Tolerance	Dimensions (unit : mm)				
				D (max)	T (max)	F		φd
						Bulk type	Taping type	
CH*AC***C060*	CH (NP0)	2, 3,4, 5(pF)	±0.25pF	7.0	5.0	7.5±1, 10±1	0.55+/-0.05	
CH*AC***D060*		6,7,8,9,10(pF)	±0.5pF	7.0				
CH*AC***J060*		12,15(pF)	±5%	7.0				
CH*AC***J070*		18,20,22, 24(pF)	±5%	8.0				
CH*AC***J080*		27,30,33,(pF)	±5%	9.0				
CH*AC***J090*		36,39(pF)	±5%	10.0				
CH*AC470J100*		47(pF)	±5%	11.0				
SL*AC***J060*	SL	10,12,15,18,20,22,24,27,30,33,36,39,47,50,51(pF)	±5%	7.0				
SL*AC***J070*		56,62, 68,75(pF)	±5%	8.0				
SL*AC820J080*		82pF	±5%	9.0				
SL*AC101J090*		100pF	±5%	10.0				
YP*AC101K060*	Y5P	100 pF	±10%	7.0				
YP*AC151K060*		150 pF	±10%	7.0				
YP*AC221K060*		220 pF	±10%	7.0				
YP*AC331K060*		330 pF	±10%	7.0				
YP*AC471K060*		470 pF	±10%	7.0				
YP*AC561K070*		560pF	±10%	8.0				
YP*AC681K070*		680 pF	±10%	8.0				
YP*AC821K080*		820 pF	±10%	9.0				
YP*AC102K080*		1000 pF	±10%	9.0				
YU*AC102M060*	Y5U	1000 pF	±20%	7.0				
YU*AC152M080*		1500 pF	±20%	9.0				
YU*AC222M080*		2200 pF	±20%	9.0	7.5±1 (AMD7) Or 10±1 (AMD0)			
YU*AC332M100*		3300 pF	±20%	11.0				
YU*AC392M120*		3900 pF	±20%	13.0				
YU*AC472M120*		4700 pF	±20%	13.0				
YV*AC102M060*	Y5V	1000 pF	±20%	7.0	7.5±1 (AFD7) Or 10±1 (AMD0)			
YV*AC152M060*		1500 pF	±20%	7.0				
YV*AC222M060*		2200 pF	±20%	7.0				
YV*AC332M080*		3300 pF	±20%	9.0				
YV*AC392M100*		3900 pF	±20%	11.0	7.5±1 (AMD7) Or 10±1 (AMD0)			
YV*AC472M100*		4700 pF	±20%	11.0				
YV*AC682M120*		6800 pF	±20%	13.0				
YV*AC103M140*		10000 pF	±20%	15.0				

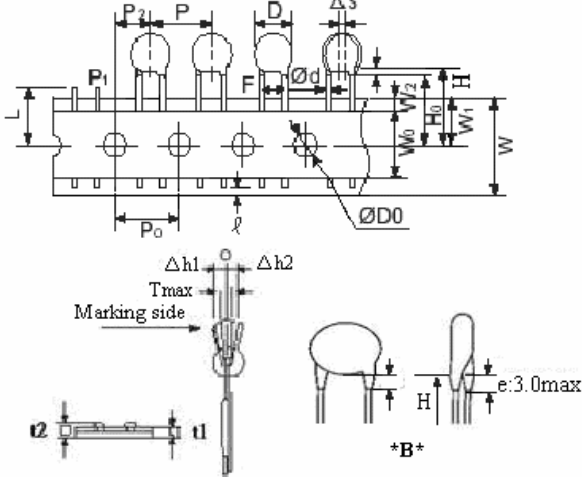
3.2 Special design parts:

SAP Part. No.	T.C.	Capacitance	Tolerance	Dimensions (unit : mm)				
				D (max)	T (max)	F		φd
						Bulk type	Taping type	
YP*AC101K06S*	Y5P	100 pF	±10%	7.0	5.0	7.5±1, 10±1	7.5±1 (AFD7) Or 10±1 (AMD0)	0.55+/-0.05
YP*AC151K06S*		150 pF	±10%	7.0				
YP*AC221K06S*		220 pF	±10%	7.0				
YP*AC331K06S*		330 pF	±10%	7.0				
YP*AC471K07S*		470 pF	±10%	8.0				
YP*AC561K08S*		560pF	±10%	9.0				
YP*AC681K09S*		680 pF	±10%	10.0				
YP*AC102K10S*		1000 pF	±10%	11.0				
YU*AC102M07S*	Y5U	1000 pF	±20%	8.0	5.0	7.5±1, 10±1	7.5±1 (AFD7) Or 10±1 (AMD0)	0.55+/-0.05
YU*AC152M08S*		1500 pF	±20%	9.0				
YU*AC222M09S*		2200 pF	±20%	10.0				
YU*AC332M11S*		3300 pF	±20%	12.0				
YU*AC392M12S*		3900 pF	±20%	13.0				
YU*AC472M13S*		4700 pF	±20%	14.0				

- The special parts only improve surge withstanding, but can't independently be used in protecting application against surge.

4. Taping Format

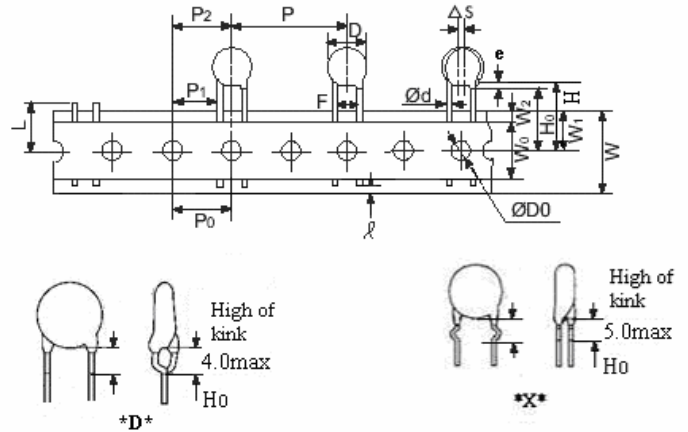
- 15mm pitch/lead spacing 7.5mm taping

 Lead Code: ***BAFD7 & *DAFD7 & *XAFD7**


- 25.4mm pitch/lead spacing 10.0mm taping

 Lead Code: ***DAMD0 & *XAMD0 & *BAMD0**

- 25.4mm pitch/lead spacing 7.5mm taping

 Lead code: ***DAMD7 & *XAMD7 & *BAMD7**


POE Part Number		*BAFD7	*DAFD7 *XAFD7	*BAMD7 *DAMD7 *XAMD7	*BAMD0 *DAMD0 *XAMD0
Item	Symbol	Dimensions (mm)	Dimensions (mm)	Dimensions (mm)	Dimensions (mm)
Pitch of component	P	15.0	15.0	25.4	25.4
Pitch of sprocket	P0	15.0±0.3	15.0±0.3	12.7±0.3	12.7±0.3
Lead spacing	F	7.5±1.0	7.5±1.0	7.5±1.0	10.0±1.0
Length from hole center to component center	P2	7.5±1.5	7.5±1.5	12.7±1.5	12.7 ± 1.5
Length from hole center to lead	P1	3.75±1.0	3.75±1.0	8.95±1.0	7.7±1.5
Body diameter	D	See the “3. Part numbering/T.C/Capacitance/ Tolerance/Diameter”			
Deviation along tape, left or right	△S	0±2.0			
Carrier tape width	W	18.0 +1/-0.5			
Position of sprocket hole	W1	9.0±0.5			
Lead distance between the kink and center of sprocket hole	H0	---	18.0+2.0/-0	18.0+2.0/-0 (For: *DAMD7 / *XAMD7)	18.0+2.0/-0 (For: *DAMD0 / *XAMD0)
Lead distance between the bottom of body and the center of sprocket hole	H	20.0+1.5/-1.0	---	20.0+1.5/-1.0 (For: *BAMD7)	20.0+1.5/-1.0 (For: *BAMD0)
Length from the terminal of the lead wire to the edge of carrier tape	ℓ	2.0min (Or the end of lead wire may be inside the hole-down tape.)			
Diameter of sprocket hole	D0	4.0±0.2			
Lead diameter	φd	0.55±0.05			
Total tape thickness	t1	0.6±0.3			
Total thickness, tape and lead wire	t2	1.5 max.			
Deviation across tape	△h1/△h2	2.0 max.			
Portion to cut in case of defect	L	11.0 max.			
Hole-down tape width	W0	8.0 min			
Hole-down tape distortion	W2	1.5±1.5			
Coating extension on leads	e	3.0 max for straight lead style; Not exceed the kink leads for kink lead.			
Body thickness	T	See the “3. Part numbering/T.C/Capacitance/ Tolerance/Diameter”			

5. Marking :

1. Type Designation	AC
2. Nominal Capacitance	Identified by 3-Figure Code. Ex. 47pF → "47" , 470pF → "471"
3. Capacitance Tolerance	C:±0.25pF, D:±0.5pF, J:±5%, K:±10%, M:±20%
4. Company Name Code (Trade mark)	UK
5. Products ID	Abbreviation ex.

6. Approved monogram:

6.1 VDE		or		6.3 CSA		6.5 NEMKO		6.7 FIMKO		6.9 CQC	
6.2 UL		6.4 SEMKO		6.6 DEMKO		6.8 SEV					

Marking Ex.:	Type	Two sides marking (for SAP part number 10-11 digits ≤ "07" products)		One side marking (for SAP part number 10-11 digits ≥ "08" products)
	0AC (X1:400Vac/ Y2:250Vac)			
	1AC (X1:440Vac/ Y2:300Vac)			

* The marking shall be easily legible.

* "C", Marked with code " _ " stand for Halogen and Pb free epoxy resin.

6. Scope

THIS SPECIFICATION APPLIES TO CERAMIC INSULATED CAPACITORS DISK TYPE USED IN ELECTRONIC EQUIPMENT.

1. VDE/SEV/SEMKO/FIMKO/NEMKO/DEMKO/ UL/CSA recognized capacitor for Antenna coupling and AC line-by-pass.X1, Y2 Capacitor based on IEC 60384-14
“UL, CSA recognized for across-the-line, line-by-pass” and antenna-isolation.

2.Approval Standard and Recognized No.

Safety Standard	Standard No.	Subclass	w.v.	Recognized No.
UL	ANSI/UL 60384-14:2009	X1	400VAC or 440VAC	E146544
		Y2	250VAC or 300VAC	
CSA	CAN/CSA E60384-14:2009	X1	400VAC or 440VAC	2347969
		Y2	250VAC or 300VAC	
VDE (ENEC)	EN 60384-14:2013 IEC60384-14:2013	X1	400VAC or 440VAC	40001829
		Y2	250VAC or 300VAC	
SEV	IEC60384-14:2013	X1	400VAC	14.0554
		Y2	250VAC	
SEMKO	EN 60384-14:2013	X1	400VAC	1411212
		Y2	250VAC	
FIMKO	EN 60384-14:2013	X1	400VAC	NCS/FI 28679A1
		Y2	250VAC	
NEMKO	EN 60384-14:2013	X1	400VAC	P14219060
		Y2	250VAC	
DEMKO	EN 60384-14:2013	X1	400VAC	D-03994 A1
		Y2	250VAC	
CQC	GB/T 14472-1998	X1:400VAC /Y1:250VAC		CQC08001026519
	IEC60384-14 2005	X1: 440VAC /Y2:300VAC		CQC15001121984
KTL	K60384-14 2006	X1	400VAC or 440VAC	SU03065-14001
		Y2	250VAC	SU03065-14002
		Y2	300VAC	SU03065-14003A

7. Specification and test method

7.1 Operating Temperature Range :



-40 to +125°C

7.2 Test condition:



Test and measurement shall be made at the standard condition. (temperature 15~35°C, relative humidity 45~75% and atmospheric pressure 860~1060hpa). Unless otherwise specified herein.

If doubt occurred on the value of measurement, and measurement was requested by customer capacitors shall be measured at the reference condition. (temperature 20±2°C or 25 ± 2°C, relative humidity 60~70% and atmospheric pressure 860~1060hpa.)

7.3 Performance:

Item		Specification	Testing Method												
1	Between lead wires	No failure.	The capacitors shall not be damage when AC2600V(rms.) are applied between the lead wires for 60 sec. (Charge/Discharge current □ 50mA.)												
	Body Insulation	No failure.	First the terminal of capacitor shall be connected together. Then a metal foil shall be closely wrapped around the body of the capacitor distance of about 3 to 4 mm from each terminal. Then the capacitor shall be inserted into a container filled with metal balls of about 1 mm diameter. Finally. AC2600V(rms.) is applied for 60 sec. between the capacitor lead wires and metal balls. (Charge/Discharge current □ 50mA.) 												
2	Insulation Resistance(I.R.)	10000MΩ min.	The insulation resistance shall be measured with 500±50VDC with 60±5sec. of charging.												
3	Capacitance	Within specified tolerance	B&E&F: The capacitance shall be measured at 20±2°C with 1kHz±20% and 5V(rms.) or less. CH&SL: The capacitance shall be measured at 25°C with 1MHz±20% and 1.0±0.2Vrms												
4	Dissipation Factor(D.F.) or Q	Char. Specification													
		Y5P, Y5U D.F ≤ 2.5%													
		Y5V D.F ≤ 5.0%													
CH,SL Q: 30pF&above: ≥ 1000 Below 30PF: ≥ 400+20×C															
5	Temperature Characteristic	Char. Capacitance Change	The capacitance measurement shall be made at each step specified in table 1. (Table 1) <table border="1" data-bbox="833 1503 1174 1677"> <thead> <tr> <th>Step</th> <th>Temperature</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>+20±2°C</td> </tr> <tr> <td>2</td> <td>-25±2°C</td> </tr> <tr> <td>3</td> <td>+20±2°C</td> </tr> <tr> <td>4</td> <td>+85±2°C</td> </tr> <tr> <td>5</td> <td>+20±2°C</td> </tr> </tbody> </table> Pr-treatment : Capacitor shall be stored at 85±2°C for 1 hour. Then placed at room condition for 1(※)24±2 hours before measurement	Step	Temperature	1	+20±2°C	2	-25±2°C	3	+20±2°C	4	+85±2°C	5	+20±2°C
		Step		Temperature											
		1		+20±2°C											
		2		-25±2°C											
		3		+20±2°C											
4	+85±2°C														
5	+20±2°C														
Y5P Within ± 10%															
Y5U Within ± $\frac{2}{5}$ %															
Y5V Within -80 ~ +30%															
CH 0±60ppm/°C															
SL -1000~+350 ppm/°C (+20°C ~+85°C)															
6	Robustness of Termination	Tensile	Lead wire shall not cut off capacitor shall not be broken. As shown in the figure at right, fix the body of the capacitor and apply a tensile weight gradually to each lead wire in the radial direction of the capacitor up to 10N and keep it for 10±1 sec. 												
		Bending	Lead wire shall not cut off capacitor shall not be broken. W Each lead wire should be subjected to 5N of weight and bent 90° at the point of egress, in one direction, then returned to its original position and bent 90° in the opposite direction at the rate of one bend in 2 to 3 sec.												

※ "room condition" temperature : 15~35°C, humidity : 45~75%, atmospheric pressure : 86~106kPa

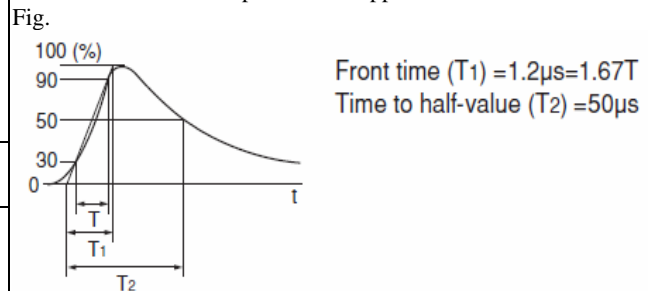
Item		Specification	Testing Method
7	Solderability of leads	Lead wire should be soldered with uniform coating on the axial direction over 3/4 of the circumferential direction.	<p>The lead wire of capacitor should be dipped into molten solder for 5 ± 0.5 sec.</p> <p>The depth of immersion is up to about 1.5 to 2.0 mm from the root of lead wires.</p> <p>Temp. of solder : Lead free solder (Sn-3Ag -0.5Cu) 245 ± 5 °C</p>
8	Soldering Effect (Non-Preheat)	Appearance	No marked defect
		I.R.	1000MΩ min.
		Dielectric Strength	Per Item 1.
		Capacitance	Y5P,Y5U,Y5V : Within $\pm 10\%$ SL,CH: Within $\pm 2.5\%$ or $\pm 0.25\text{pF}$, Whichever is large.
	Soldering Effect (On-Preheat)	Appearance	No marked defect.
		I.R.	1000MΩ min.
		Dielectric Strength	Per Item 1.
		Capacitance	Y5P,Y5U,Y5V : Within $\pm 10\%$ SL,CH: Within $\pm 2.5\%$ or $\pm 0.25\text{pF}$, Whichever is large.
			<p>As shown in figure, the lead wires should be immersed in solder of 350 ± 10 °C or 260 ± 5 °C up to 1.5 to 2.0mm from the root of Terminal for 3.5 ± 0.5 sec (10 ± 1 sec for 260 ± 5 °C)</p>  <p>Pre-treatment: Capacitor shall be stored at 85 ± 2 °C for 1hour.then placed at ^{**1}room condition for 24 ± 2hours before initial measurements.</p> <p>Post-treatment: Capacitor shall be stored for 1 to 2hours at ^{**1}room condition.</p>
			<p>First the capacitor should be stored at $120 + 0 / -5$ °C for $60 + 0 / -5$sec.</p> <p>Then, as in figure , the lead wires should be immersed solder of $260 + / -5$ °C up to 1.5 to 2.0 mm from the root of terminal for $7.5 + 0 / -1$ sec.</p>  <p>Pre-treatment: Capacitor shall be stored at 85 ± 2 °C for 1hour.then placed at ^{**1}room condition for 24 ± 2hours before initial measurements.</p> <p>Post-treatment: Capacitor shall be stored for 1 to 2hours at ^{**1}room condition.</p>

Item		Specification	Testing Method				
9	Humidity (Under Steady State)	Appearance	No marked defect.				
		Capacitance	Y5P : Within $\pm 10\%$ Y5U : Within $\pm 20\%$ Y5V : Within $\pm 30\%$ SL&CH: Within $\pm 2.5\%$ or $\pm 0.25\text{pF}$, Whichever is large.				
		D.F.	Y5P, Y5U : 5.0% max. Y5V : 7.5% max.				
10	Humidity Loading	Q	SL&CH: Less than 30pF=> $Q \geq 100 + 10 \times C/3$ More than 30pF=> $Q \geq 200$				
		I.R.	B,E,F : 3000M Ω min. SL&CH: 1000M Ω min.				
		Appearance	No marked defect.				
11	Life	Capacitance	Y5P, Y5U, Y5V : Within $\pm 20\%$ SL&CH: Within $\pm 3\%$ or $\pm 0.3\text{pF}$, Whichever is large.				
		I.R.	3000M Ω min. SL&CH: 1000M Ω min.				
		Dielectric Strength	Per Item 1.				
		Appearance	No marked defect.				
12	Flame Test	The capacitor flame discharge as follows.					
		<table border="1"> <thead> <tr> <th>Cycle</th> <th>Time</th> </tr> </thead> <tbody> <tr> <td>1~4</td> <td>30 sec, max.</td> </tr> <tr> <td>5</td> <td>60 sec, max.</td> </tr> </tbody> </table>	Cycle	Time	1~4	30 sec, max.	5
Cycle	Time						
1~4	30 sec, max.						
5	60 sec, max.						

Set the capacitor for 500 \pm 12 hours at 40 \pm 2 $^{\circ}$ C, in 90 to 95% humidity.
Then capacitor shall be stored for 1 to 2 hours at room condition.

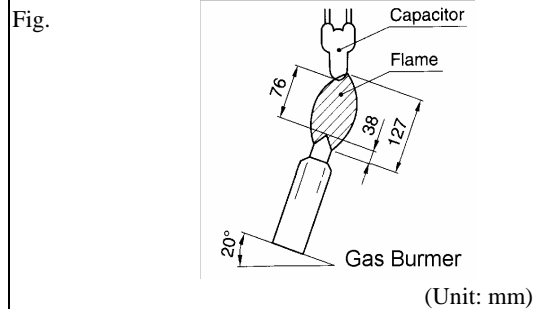
Apply the rated voltage for 500 \pm 12 hours at 40 \pm 2 $^{\circ}$ C, in 90 to 95% humidity and set it for 1 to 2 hours at room condition.

Impulse Voltage:
Each individual capacitor shall be subjected to a 5kv impulses for three times. After the capacitors are applied to life test.

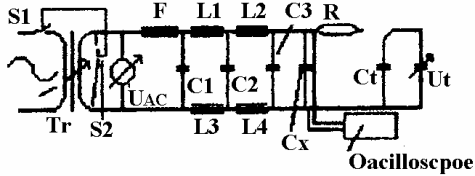

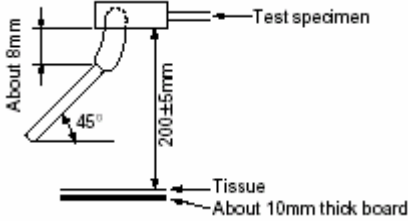


The specimen capacitors are placed in a circulating air oven for a period of 1000 hrs. The air in the oven is maintained at a temperature of 125 \pm 2 $^{\circ}$ C. Throughout the test. The capacitors are subjected to an AC425Vrms.(for 2AC type) or AC510Vrms.(for 3AC type) alternating voltage of mains frequency. Except that once each hour the voltage id increased to 1000Vrms for 0.1sec.

The capacitor shall subject to applied for 15 sec And then removed for 15 sec, until 5 cycles.



※ "room condition" temperature : 15~35 $^{\circ}$ C, humidity : 45~75%, atmospheric pressure : 86~106kPa

Item	Specification	Testing Method
13 Active Flammability	The cheesecloth shall not be on fire.	<p>The specimens shall be individually wrapped in at least one but more than two complete layers of cheesecloth. The specimens shall be subjected to 20 discharges. The interval between successive discharges shall be 5sec. The U_{ac} shall be maintained for 2 min. after the last discharge.</p> <p>Fig.</p>  <p style="text-align: right;">Oscilloscope</p> <p> $C_{1,2} : 1Mf \pm 10\%$ $C_3 : 0.03Mf \pm 5\% \ 10KV$ $L_{1-4} : 1.5Mh \pm 20\%$ 16A Rod core choke $R : 100\Omega \pm 2\%$ $C_t : 3Mf \pm 5\% \ 10KV$ $U_{ac} : U_r \pm 5\%$ $U_r : \text{Rated working voltage}$ $C_x : \text{Capacitor}$ $F : \text{Fuse, Rated 10A}$ $U_t : \text{Voltage applied to } C_t$ </p> 
14 Passive Flammability	The burning time shall not be exceeded the time 30 sec. The tissue paper shall not ignite.	<p>The capacitor under test shall be held in the flame in the position, which best promotes burning. Each specimen shall only be exposed once to the flame.</p> <p>Time of exposure to flame : 30 sec Length of flame : 12 ± 1 mm Gas burner : Length 35 mm min. Inside Dia. : 0.5 ± 0.1 mm Outside Dia. : 0.9 mm max. Gas : Butane gas Purity 95% min.</p> <p>Fig.</p> 

Item		Specification		Testing Method																		
15	Temperature Cycle	Appearance		No marked defect																		
		Char.	Cap. Change	DF / Q																		
		SL, CH	$\leq \pm 5\%$	$Q \geq 275 + 5/2C$ (C < 30pF) $Q \geq 350$ (C \geq 30pF)																		
		Y5P	$\leq \pm 10\%$	DF \leq 5.0%																		
		Y5U, Y5V	$\leq \pm 20\%$	DF \leq 7.5%																		
		I.R.		3000M Ω min.																		
Dielectric strength		Per Item 1			The capacitor should be subjected to 5 temperature cycles, <Temperature Cycle time: 5 cycles> <table border="1" style="margin-left: 40px;"> <thead> <tr> <th>Step</th> <th>Temperature(°C)</th> <th>Time(min)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>-40+0/-3</td> <td>30</td> </tr> <tr> <td>2</td> <td>Room temp.</td> <td>3</td> </tr> <tr> <td>3</td> <td>125+3/-0</td> <td>30</td> </tr> <tr> <td>4</td> <td>Room temp.</td> <td>3</td> </tr> </tbody> </table> Pre-treatment: Capacitor shall be stored at 85 \pm 2°C for 1hour.then placed at *1 room condition for 24 \pm 2hours. Post-treatment: Capacitor shall be stored for 1 to 2hours at *1 room condition.			Step	Temperature(°C)	Time(min)	1	-40+0/-3	30	2	Room temp.	3	3	125+3/-0	30	4	Room temp.	3
Step	Temperature(°C)	Time(min)																				
1	-40+0/-3	30																				
2	Room temp.	3																				
3	125+3/-0	30																				
4	Room temp.	3																				

※ “room condition” temperature : 15~35°C, humidity : 45~75%, atmospheric pressure : 86~106kPa

8. Packing specification :
8.1 Packing size:

	Box	Carton
Bulk		<p>PF% WV N.W: KG KPCS G.W: KG</p>
Ammo taping		<p>PF% WV N.W: KGS</p>
		<p>PF% WV N.W: KGS</p>
		<p>PF% WV N.W: KGS</p>

8.2 Packing quantity:

Packing type	The code of 14th to 15th in SAP P/N	MPQ(Kpcs/Box)
Taping	AF	1
	AM (The size code ≤ 11)	1
	AM (The size code ≥ 12)	0.5

Packing type	Lead length	Size code of 10th to 11th in SAP P/N	MPQ (Kpcs/Bag)	Kpcs/Box
Bulk	Long lead ($L \geq 20$ mm)	06~12	0.5	1.5
		13-15	0.5	1
	Short lead ($L < 20$ mm)	06~14	0.5	2
		15	0.2	1
	All	16	0.2	1

9. Notices:

9.1 Caution(Rating):

(1). Operating Voltage

Be sure to maintain the V_{p-p} value of the applied voltage or the V_{0-p} which contains DC bias within the rated voltage range.

When the voltage is started to apply to the circuit or it is stopped applying, the irregular voltage may be generated for a transit period because of resonance or switching. Be sure to use a capacitor within rated voltage containing this irregular voltage.

Voltage	DC Voltage	DC+AC Voltage	AC Voltage	Pulse Voltage (1)	Pulse Voltage (2)
Positional Measurement					

(2). Operating Temperature and Self-generated Heat

Keep the surface temperature of a capacitor below the upper limit of its rated operating temperature range. Be sure to take into account the heat generated by the capacitor itself. When the capacitor is used in a high-frequency current, pulse current or the like, it may have the self-generated heat due to dielectric-loss. Applied voltage should be the load such as self-generated heat is within 20°C on the condition of atmosphere temperature 25°C . When measuring, use a thermocouple of small thermal capacity-K of $\phi 0.1\text{mm}$ and be in the condition where capacitor is not affected by radiant heat of other components and wind of surroundings. Excessive heat may lead to deterioration of the capacitor's characteristics and reliability.

(3). Test condition for withstanding Voltage

I. Test Equipment

Test equipment for AC withstanding voltage shall be used with the performance of the wave similar to 50/60 Hz sine waves.

If the distorted sine wave or over load exceeding the specified voltage value is applied, the defective may be caused.

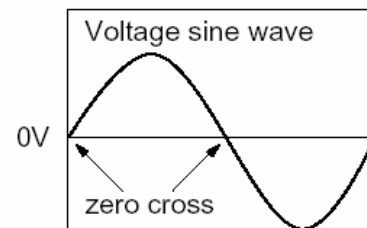
II. Voltage Applied Method

When the withstanding voltage is applied, capacitor's lead or terminal shall be firmly connected to the output of the withstanding voltage test equipment, and then the voltage shall be raised from near zero to the test voltage.

If the test voltage without the raise from near zero voltage would be applied directly to capacitor, test voltage should be applied with the *zero cross. At the end of the test time, the test voltage shall be reduced to near zero, and then capacitor's lead or terminal shall be taken off the output of the withstanding voltage test equipment.

If the test voltage without the raise from near zero voltage would be applied directly to capacitor, the surge voltage may arise, and therefore, the defective may be caused.

ZERO CROSS is the point where voltage sine wave pass
0V.- See the right figure.



(4). Fail-Safe

When capacitor would be broken, failure may result in a short circuit. Be sure to provide an appropriate fail-safe function like a fuse on your product if failure would follow an electric shock, fire or fume.

Failure to follow the above cautions may result, worst case, in a short circuit and cause fuming or partial dispersion when the product is used.

9.2 Caution (Storage and operating condition):

Operating and storage environment

The insulating coating of capacitors does not form a perfect seal; therefore, do not use or store capacitors in a corrosive atmosphere, especially where chloride gas, sulfide gas, acid, alkali, salt or the like are present. And avoid exposure to moisture. Before cleaning, bonding, or molding this product, verify that these processes do not affect product quality by testing the performance of a cleaned, bonded or molded product in the intended equipment. Store the capacitors where the temperature and relative humidity do not exceed -10 to 40 degrees centigrade and 15 to 85 %. Use capacitors within 6 months.

"Failure to follow the above cautions may result, worst case, in a short circuit and cause fuming or partial dispersion when the product is used."

9.3 Caution (Soldering and Mounting):

9.3.1 Vibration and impact:

Do not expose a capacitor or its leads to excessive shock or vibration during use.

9.3.2 Soldering:

When soldering this product to a PCB/PWB, do not exceed the solder heat resistance specification of the capacitor. Subjecting this product to excessive heating could melt the internal junction solder and may result in thermal shocks that can crack the ceramic element.

When soldering capacitor with a soldering iron, it should be performed in following conditions.

Temperature of iron-tip: 400 degrees C. max.

Soldering iron wattage: 50W max.

Soldering time: 3.5 sec. max.

9.3.3 Cleaning (ultrasonic cleaning):

To perform ultrasonic cleaning, observe the following conditions.

Rinse bath capacity: Output of 20 watts per liter or less.

Rinsing time: 5 min maximum.

Do not vibrate the PCB/PWB directly.

Excessive ultrasonic cleaning may lead to fatigue destruction of the lead wires.

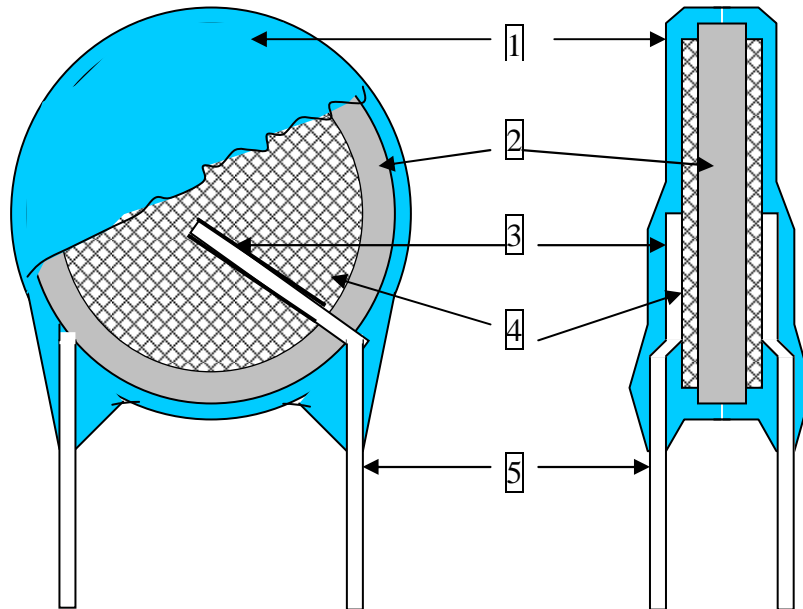
"Failure to follow the above cautions may result, worst case, in a short circuit and cause fuming or partial dispersion when the product is used."

9.4 Caution (Handling):

Vibration and impact

Do not expose a capacitor or its leads to excessive shock or vibration during use.

"Failure to follow the above cautions may result, worst case, in a short circuit and cause fuming or partial dispersion when the product is used."

10. Drawing of internal structure and material list:

Remarks :

No.	Part name	Material	Model/Type	Component
1	Insulation Coating	Epoxy polymer	1.EF-150 2.PCE-300	Epoxy resin、Pigment (Blue / UL 94 V-0)
2	Dielectric Element	Ceramic	CH/SL/Y5P/Y5U/Y5V	BaTiO ₃
3	Solder	Tin-silver	Sn96.5-Ag3-Cu0.5	Sn96.5-Ag3-Cu0.5
4	Electrodes	Ag	1.SP-160PL 2.SP-260PL	Silver、Glass frit
5	Leads wire	Tinned copper clad steel wire	0.55±0.05 mm	Substrate metal: Fe & Cu Surface plating: Sn 100%(3~7μm)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Tantalum Capacitors - Polymer SMD category](#):

Click to view products by [Walsin manufacturer](#):

Other Similar products are found below :

[2R5TAE680ML](#) [T58BB226M025C0150](#) [23484-337](#) [TCJD227M010R0050E](#) [TCJC106M035R0200E](#) [TCJP105M025R0500E](#)
[TCJD477M004R0040E](#) [TCNX476M035R0150](#) [ASG-P-V-A-1.000GHZ](#) [F381A336MSALZT](#) [FA1E566M10126VR](#) [NTP687M4TRD\(12\)F](#)
[T520X477M006AHE040](#) [T541X336M050BH6710](#) [T541X337M016BH6720](#) [TCNT476M016R0200A](#) [ETCF680ML](#) [4TCE470ML](#)
[4TCE470MIL](#) [4TCE330M](#) [6TCE100M](#) [6TCE150MI](#) [6TCE680M](#) [6TCE220M](#) [10TCE220ML](#) [4TCE220M](#) [4TAE470ML](#)
[T520Y687M004ATE010](#) [T55D107M010C0018](#) [T59EE337M016C0025](#) [T55V337M2R5C0025](#) [TCJD106M050R0090](#) [T55D337M6R3C0045](#)
[T55D227M6R3C0055](#) [T55D227M004C0025](#) [T55D107M010C0080](#) [T55D107M010C0045](#) [T530Y687M004AHE005](#) [T55B156M025C0100](#)
[TCJ5337M010R0035](#) [TCJX475M050R0250](#) [TCJY157M016R0070](#) [TCJY475M050R0250](#) [TCME337M006R0010](#) [TCME337M006R0015](#)
[TCME687M004R0012](#) [TCN4227M020R0100](#) [TCQB476M006R0070](#) [TCRD106M050R0120J](#) [TCSE108M002CRSZ0700](#)