Digital transistors (built-in resistor) DTC614TU / DTC614TK

Features


In addition to the features of regular digital transistors.

- 1) Low saturation voltage, typically VCE (sat) =40mV at Ic / IB=50mA / 2.5mA, makes these transistors ideal for muting circuits.
- These transistors can be used at high current levels, lc=600mA.


●Structure

NPN digital transistor (Built-in resistor type)

●Equivalent circuit



●External dimensions (Unit : mm)

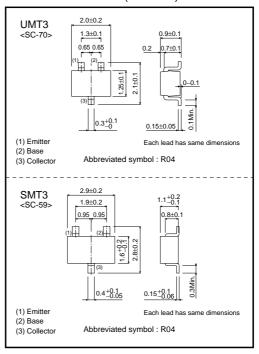

● Absolute maximum ratings (Ta=25°C)

Parameter	Symbol	Limits	Unit
Collector-base voltage	V _{CBO}	20	V
Collector-emitter voltage	Vceo	20	V
Emitter-base voltage	V _{EBO}	12	V
Collector current	Ic	600	mA
Collector power dissipation	Pc	200	mW
Junction temperature	Tj	150	°C
Storage temperature	Tstg	-55 to +150	°C

●Electrical characteristics (Ta=25°C)

Parameter	Symbol	Min.	Тур.	Max.	Unit	Conditions
Collector-base breakdown voltage	ВУсво	20	_	_	٧	Ic=50μA
Collector-emitter breakdown voltage	BVceo	20	_	_	٧	I _C =1mA
Emitter-base breakdown voltage	ВVево	12	_	_	٧	I _E =50μA
Collector cutoff current	Ісво	_	_	0.5	μΑ	V _{CB} =20V
Emitter cutoff current	I _{EBO}	_	_	0.5	μΑ	V _{EB} =12V
Collector-emitter saturation voltage	V _{CE} (sat)	_	40	150	mV	I _C / I _B =50mA / 2.5mA
DC current transfer ratio	hfe	820	_	2700	_	VcE=5V, Ic=50mA
Input resistance	R ₁	7	10	13	kΩ	_
Transition frequency	f⊤	_	150	_	MHz	V _{CE} =10V, I _E = -50mA, f=100MHz *
Output "ON" resistance	Ron	_	0.9	_	Ω	VI=5V, R _L =1kΩ, f=1KHz

^{*}Transition frequency of the device.

●Packaging specifications and hFE

~ ~ .					
Туре	Package	UMT3	SMT3		
	Packaging type	Taping	Taping		
	Code	T106	T146		
	Basic ordering unit (pieces)	3000	3000		
DTC614TU		0	_		
DTC614TK		_	0		

Electrical characteristic curves




Fig.1 DC Current Gain vs. Collector Current




Fig.2 Collector-Emitter Saturation Voltage vs. Collector Current




Fig.3 "ON" resistance vs. Input Voltage

●Ron measurement circuit




Fig.4 Output "ON" resistance (Ron) measurement circuit

Notes

- No technical content pages of this document may be reproduced in any form or transmitted by any
 means without prior permission of ROHM CO.,LTD.
- The contents described herein are subject to change without notice. The specifications for the
 product described in this document are for reference only. Upon actual use, therefore, please request
 that specifications to be separately delivered.
- Application circuit diagrams and circuit constants contained herein are shown as examples of standard use and operation. Please pay careful attention to the peripheral conditions when designing circuits and deciding upon circuit constants in the set.
- Any data, including, but not limited to application circuit diagrams information, described herein are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO.,LTD. disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices, other than for buyer's right to use such devices itself, resell or
 otherwise dispose of the same, no express or implied right or license to practice or commercially
 exploit any intellectual property rights or other proprietary rights owned or controlled by
- ROHM CO., LTD. is granted to any such buyer.
- Products listed in this document are no antiradiation design.

The products listed in this document are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys).

Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

About Export Control Order in Japan

Products described herein are the objects of controlled goods in Annex 1 (Item 16) of Export Trade Control Order in Japan.

In case of export from Japan, please confirm if it applies to "objective" criteria or an "informed" (by MITI clause) on the basis of "catch all controls for Non-Proliferation of Weapons of Mass Destruction.



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Bipolar Transistors - Pre-Biased category:

Click to view products by ROHM manufacturer:

Other Similar products are found below:

RN1607(TE85L,F) DTA124GKAT146 DTA144WETL DTA144WKAT146 DTC113EET1G DTC115TETL DTC115TKAT146

DTC124TETL DTC144ECA-TP DTC144VUAT106 MUN5241T1G BCR158WH6327XTSA1 NSBA114TDP6T5G NSBA143ZF3T5G

NSBC114YF3T5G NSBC123TF3T5G SMUN5235T1G SMUN5330DW1T1G SSVMUN5312DW1T2G RN1303(TE85L,F)

RN4605(TE85L,F) TTEPROTOTYPE79 DDTC114EUAQ-7-F EMH15T2R SMUN2214T3G NSBC114TF3T5G NSBC143ZPDP6T5G

NSVMUN5113DW1T3G SMUN5230DW1T1G SMUN5133T1G SMUN2214T1G DTC114EUA-TP NSBA144EF3T5G

NSVDTA114EET1G 2SC2223-T1B-A 2SC3912-TB-E SMUN5237DW1T1G SMUN5213DW1T1G SMUN5114DW1T1G SMUN2111T1G

NSVDTC144EM3T5G DTC124ECA-TP DTC123TM3T5G DTA114ECA-TP DTA113EM3T5G DCX115EK-7-F DTC113EM3T5G

NSVMUN5135DW1T1G NSVMUN2237T1G NSVDTC143ZM3T5G