



Features

- Miniature Relay Ideal for Switching Motor Load Lamp Load, Heater, etc.
- Creepage Distance of more than .08"
- Upper Mounting Bracket Type for Easy Wiring and Mounting
- .187" (4.75mm) Quick Connect Coil Terminals
- .250" (6.35mm) Quick Connect Terminals for Load

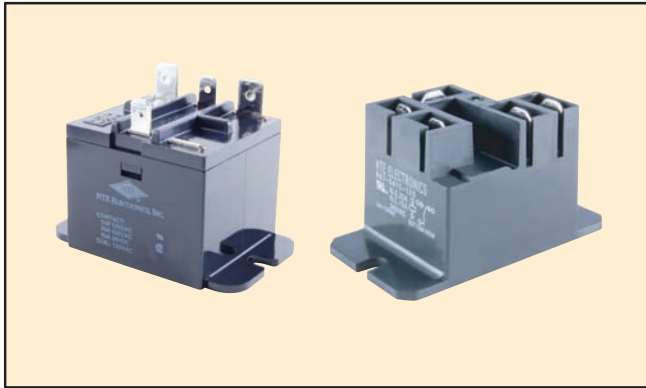


SPST-NO, 1 Form "A"


SPDT, 1 Form "C"



* Pin5 (NC) is missing on all SPST-NO devices.



SPDT, 1 Form "C"
R47-5A15-120



AC OPERATED						
NTE TYPE No.	Nom. Voltage	Contact Arr.	Coil Res. Ohms (Typ)	Approx. Nom. Power	Max. Contact Cur. @ 24VDC or 220VAC	Diag No.
R47-1A15-24	24VAC	SPST-NO	-	1.3VA	15A	D43a
R47-1A15-120	120VAC	SPST-NO	-	1.3VA	15A	D43a
R47-5A15-24	24VAC	SPDT	-	1.3VA	15A	D43a
R47-5A15-120	120VAC	SPDT	-	1.6VA	20A/10A *	D43b


* 250VAC, Resistive, 25°C

R47 Series




General Purpose, 15 Amp, AC SPST-NO & SPDT Relay for HVAC, Appliance Controls, and Copiers.

D43a

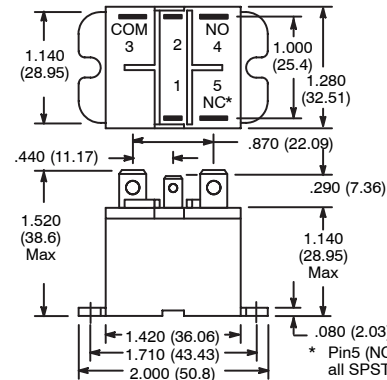

* Pin5 (NC) is missing on all SPST-NO devices.

D43b



Electrical Specifications

Contact

Rating: 15 Amp @ 28VDC (resistive load)
15 Amp @ 120VAC (inductive load)
10 Amp @ 240VAC (inductive load)
1HP @ 120VAC
20A/10A, 250VAC (resistive load) **R47-5A15-120 ONLY**

Material: AgCdO
AgSnOInO **R47-5A15-120 ONLY**

Resistance: 30mΩ (max.)
75mΩ (at 1A at 5VDC or 12VAC) **R47-5A15-120 ONLY**

Coil

Coil Voltages: See Chart

Pick-up Voltages: 80% of nominal Coil Vltg.

Drop-out Voltages: 30% of rated voltage (min.)

Resistance: See Chart

Operational Characteristics

Timing Values: **Operate Time:** 20 mS (max.)

. . . . **Operate Time:** 15 mS (max.) **R47-5A15-120**

Insulation Characteristics

Dielectric Strength: 2000VAC, 50/60Hz for 1 minute
(1000VAC between open contacts)
2500V_{rms} **R47-5A15-120 ONLY**
(1500VAC between open contacts)

Insulation Resistance: 100MΩ min. (at 500VDC)
1MΩ min. **R47-5A15-120 ONLY**

Environmental Characteristics

Operating: -10°C to +55°C

Life

Mechanical: 10,000,000 operations min
5,000,000 operations min **R47-5A15-120 ONLY**

Weight

Std: 1.55 oz (44 grams) approx

Std: 1.16 oz (33 grams) approx **R47-5A15-120 ONLY**

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [General Purpose Relays](#) category:

Click to view products by [NTE](#) manufacturer:

Other Similar products are found below :

[APF30318](#) [JVN1AF-4.5V-F](#) [PCN-105D3MHZ](#) [5JO-10000S-SIL](#) [5JO-1000CD-SIL](#) [5JO-400CD-SIL](#) [LY2S-AC220/240](#) [LYQ20DC12](#)
[6031007G](#) [6131406HQ](#) [6-1393099-3](#) [6-1393099-8](#) [6-1393122-4](#) [6-1393123-2](#) [6-1393767-1](#) [6-1393843-7](#) [6-1415012-1](#) [6-1419102-2](#) [6-](#)
[1423698-4](#) [6-1608051-6](#) [6-1608067-0](#) [6-1616170-6](#) [6-1616248-2](#) [6-1616282-3](#) [6-1616348-2](#) [6-1616350-1](#) [6-1616350-8](#) [6-1616358-7](#) [6-](#)
[1616359-9](#) [6-1616360-9](#) [6-1616931-6](#) [6-1617039-1](#) [6-1617052-1](#) [6-1617090-2](#) [6-1617090-5](#) [6-1617347-5](#) [6-1617353-3](#) [6-1617801-8](#) [6-](#)
[1617802-2](#) [6-1618107-9](#) [6-1618248-4](#) [M83536/1-027M](#) [CX-4014](#) [MAHC-5494](#) [MAVCD-5419-6](#) [703XCX-120A](#) [7-1393100-5](#) [7-1393111-7](#)
[7-1393144-5](#) [7-1393767-8](#)