# 4-Direction Detector Surface Mount type

RPI-1050 Datasheet


#### Applications

- DSCs
- DVCs
- Projectors

#### Features

- 1) Surface mount
- 2) Optical
- 3) 4-way detection possible

#### ●Dimensions (Unit: mm)

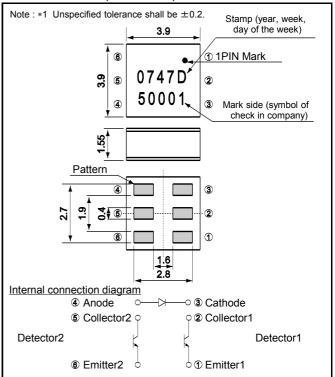

## ● Absolute maximum ratings (Ta = 25°C)

Pa	rameter	Symbol Value		Unit
Input (Infrared light	Forward current	I <sub>F</sub>	35	mA
	Reverse voltage	V <sub>R</sub>	5	V
emitting diode)	Collector-emitter voltage $V_{CEO}$ 30	mW		
Output (Phototransistor)	Collector-emitter voltage	V <sub>CEO</sub>	30	V
	Emitter-collector voltage	V <sub>ECO</sub>	4.5	V
	Collector current	I <sub>C</sub>	30	mA
	Collector dissipation	P <sub>C</sub>	80	mW
Operating temperature		$T_{opr}$	-25 to +85	°C
Storage temperature		$T_{stg}$	-30 to +85	°C

## ●Electrical and optical characteristics (Ta = 25°C)

## 1) Input characteristics

Parameter	Symbol	Conditions	Values			Unit
r ai ai ii etei			Min.	Тур.	Max.	Offic
Forward voltage	$V_{F}$	I <sub>F</sub> =5mA	-	1.35	1.6	V
Reverse current	I <sub>R</sub>	V <sub>R</sub> =5V	-	-	10	μΑ
Peak light emitting wavelength	$\lambda_{p}$	I <sub>F</sub> =5mA	-	850	-	nm

<sup>\*</sup> Non-coherent Infrared light emitting diode used.

## 2) Output characteristics

Parameter	Symbol	Conditions	Values			Unit
			Min.	Тур.	Max.	Offic
Dark current	I <sub>CED</sub>	V <sub>CE</sub> =10V	-	-	0.5	μΑ
Peak sensitivity wavelength	$\lambda_{p}$		-	800	-	nm

#### 3) Transfer characteristics

Parameter		Symbol	Conditions	Values			Linit
				Min.	Тур.	Max.	Unit
Collector current		ı	V <sub>CE</sub> =5V	150	-	-	μА
		I <sub>C</sub>	I <sub>F</sub> =5mA				
Leak current		I <sub>leak</sub>	V <sub>CE</sub> =5V	-	-	12	
			I <sub>F</sub> =5mA				
Collector-emitter saturation voltage		V <sub>CE(sat)</sub>	I <sub>F</sub> =20mA	-	-	0.4	V
			I <sub>C</sub> =0.1mA				
Response time	Rise time tr	tr		_	10	_	
		$V_{CC}$ =5V, $I_F$ =20mA				116	
	Fall time tf	$R_L$ =100 $\Omega$	_	10	_	μS	
				10	_		

#### •Electrical and optical characteristic curves

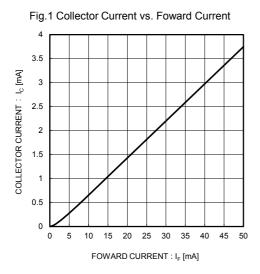


Fig.3 Forward Current vs. Foward Voltage




Fig.5 Forward Current Fall Off




Fig.2 Dark Current vs. Foward Current

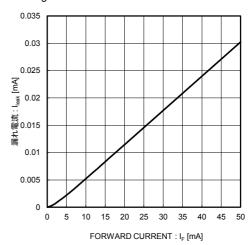


Fig.4 Relative Output vs. Ambient Temperature





Fig.6 Power Dissipation/Collector Power Dissipation vs. Ambient Temperature



#### Notes

- 1) The information contained herein is subject to change without notice.
- Before you use our Products, please contact our sales representative and verify the latest specifications:
- 3) Although ROHM is continuously working to improve product reliability and quality, semiconductors can break down and malfunction due to various factors.

  Therefore, in order to prevent personal injury or fire arising from failure, please take safety measures such as complying with the derating characteristics, implementing redundant and fire prevention designs, and utilizing backups and fail-safe procedures. ROHM shall have no responsibility for any damages arising out of the use of our Poducts beyond the rating specified by ROHM.
- 4) Examples of application circuits, circuit constants and any other information contained herein are provided only to illustrate the standard usage and operations of the Products. The peripheral conditions must be taken into account when designing circuits for mass production.
- 5) The technical information specified herein is intended only to show the typical functions of and examples of application circuits for the Products. ROHM does not grant you, explicitly or implicitly, any license to use or exercise intellectual property or other rights held by ROHM or any other parties. ROHM shall have no responsibility whatsoever for any dispute arising out of the use of such technical information.
- 6) The Products are intended for use in general electronic equipment (i.e. AV/OA devices, communication, consumer systems, gaming/entertainment sets) as well as the applications indicated in this document.
- 7) The Products specified in this document are not designed to be radiation tolerant.
- 8) For use of our Products in applications requiring a high degree of reliability (as exemplified below), please contact and consult with a ROHM representative: transportation equipment (i.e. cars, ships, trains), primary communication equipment, traffic lights, fire/crime prevention, safety equipment, medical systems, servers, solar cells, and power transmission systems.
- 9) Do not use our Products in applications requiring extremely high reliability, such as aerospace equipment, nuclear power control systems, and submarine repeaters.
- 10) ROHM shall have no responsibility for any damages or injury arising from non-compliance with the recommended usage conditions and specifications contained herein.
- 11) ROHM has used reasonable care to ensur the accuracy of the information contained in this document. However, ROHM does not warrants that such information is error-free, and ROHM shall have no responsibility for any damages arising from any inaccuracy or misprint of such information.
- 12) Please use the Products in accordance with any applicable environmental laws and regulations, such as the RoHS Directive. For more details, including RoHS compatibility, please contact a ROHM sales office. ROHM shall have no responsibility for any damages or losses resulting non-compliance with any applicable laws or regulations.
- 13) When providing our Products and technologies contained in this document to other countries, you must abide by the procedures and provisions stipulated in all applicable export laws and regulations, including without limitation the US Export Administration Regulations and the Foreign Exchange and Foreign Trade Act.
- 14) This document, in part or in whole, may not be reprinted or reproduced without prior consent of ROHM



Thank you for your accessing to ROHM product informations. More detail product informations and catalogs are available, please contact us.

## ROHM Customer Support System

http://www.rohm.com/contact/

# **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Optical Switches, Reflective, Phototransistor Output category:

Click to view products by ROHM manufacturer:

Other Similar products are found below:

LTH-1650-01 HOA1180-106 NJL5303R-TE1 ITR8307/L24/TR8 RPR-359F NJL5902R-1-TE1 OPR5005 EE-SF5-B QRD1114 ITR8307

ITR-20001T ITR-20002 ITR-8307/TR8 ITR9606-F HOA0708-001 HOA0709-001 HOA0709-011 HOA1180-001 HOA1180-002

HOA1397-001 HOA1406-003 HOA2498-002 NJL5501R-TE1 NJL5902R-2-TE1 EE-SB5 EE-SB5-B EE-SF5 EE-SPY302 EE-SPY311 EE-SPY312 EE-SPY401 EE-SPY402 EE-SPY411 EE-SPY412 EE-SPZ301A EE-SPZ401A EESB5MW12 EE-SY110 EE-SY113 EE-SY169

EE-SY169A EE-SY171 EE-SY190 EE-SY199 EE-SY671 EE-SY672 QRD1113 QRE1113 QRE1113GR SFH 9206