Photointerrupter, Small type



Absolute maximum ratings (Ta=25°C)

Parameter		Symbol	Limits	Unit
Input (LED)	Forward current	lF	50	mA
	Reverse voltage	VR	5	V
	Power dissipation	Po	80	mW
	Power supply voltage	Vcc	7	V
Output (photo IC)	Output current	lo	10	mA
οğ	Power dissipation	Po	80	mW
Operating temperature		Topr	-20 to +60	°C
Storage temperature		Tstg	-40 to +100	°C

Applications

Features

- precision.
 2) Fast response.
 3) Built-in visible light filter.

Electrical and optical characteristics (Ta=25°C)

Parameter			Symbol	Min.	Тур.	Max.	Unit	Conditions	
Input charac- teristics	Forward voltage		VF	_	1.1	1.3	V	I=10mA	
Inpu char teris	Reverse current		lr	_	_	10	μΑ	V _R =5V	
Output characteristics	Power supply voltage		Vcc	2.0	_	7.0	V	-	
	Output low level voltage		Vol	_	0.08	0.35	V	Vcc=3V, loL=2mA	
	Output high level voltage		Vон	2.8	_	3.0	V	Vcc=3V, Ir=0mA	
	Low level power supply current		ICCL	_	0.35	1.5	mA	Vcc=3V, I⊧=5mA	
	High level power supply current		Іссн	_	0.35	1.5	mA	Vcc=3V, Ir=0mA	
Transfer characteristics	High → Low Threshold input current		IFHL	0.25	-	2.5	mA	Vcc=3V	
	Hysteresis		IFLH / IFHL	0.4	0.7	0.9	_	Vcc=3V	
	me	Low → High Propagation delay time	tрLН	-	22	66		Vcc=3V, I _F =5mA, R _L =100Ω	
	esponse time	High → Low Propagation delay time	t PHL	-	5.5	16	μs		
	esp	Rise time	tr	_	5	15			
	2	Fall time	tf	_	0.05	0.15			
Infrared light emitter diode	Cut-off frequency		fc	_	1	_	MHz	I==50mA	
	Peak light emitting wavelength		λρ	_	950	_	nm	* Non-coherent Infrared light emitting diode used.	
	Response time		tr	_	5	15	μs	$\label{eq:Vcc=3V} Vcc=3V, \text{ I}_F=5\text{mA}, \text{ R}_L=100\Omega \\ *\text{ This product is not designed to be protected against electromagnetic wave}.$	
Photo IC			tf	_	0.05	0.15			

Electrical and optical characteristics curves




Fig.1 Forward current vs. forward voltage




Fig.2 Low level output voltage vs. low level output current


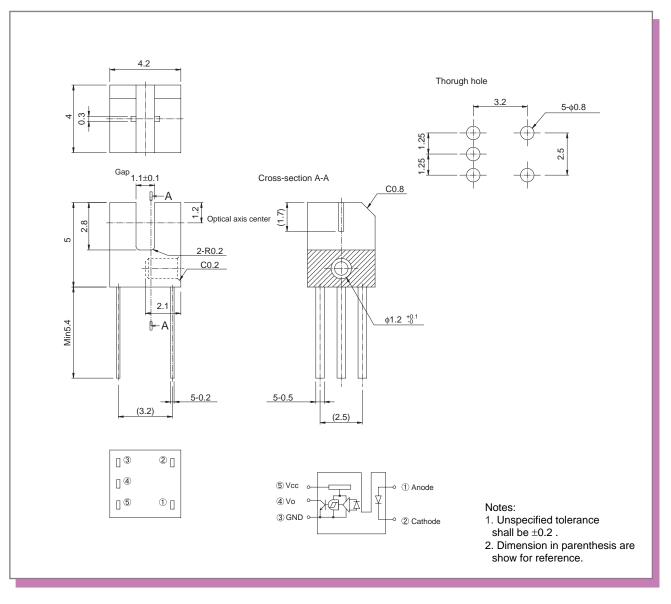




Fig.3 Low level output voltage vs.

External dimensions (Unit : mm)










Fig.7 Forward current falloff




Fig.5 Response time vs. load resistance





Fig.6 Relative output voltage vs. distance characteristics






Fig.8 Response time measurement circuit

Notes

- No technical content pages of this document may be reproduced in any form or transmitted by any means without prior permission of ROHM CO.,LTD.
- The contents described herein are subject to change without notice. The specifications for the product described in this document are for reference only. Upon actual use, therefore, please request that specifications to be separately delivered.
- Application circuit diagrams and circuit constants contained herein are shown as examples of standard use and operation. Please pay careful attention to the peripheral conditions when designing circuits and deciding upon circuit constants in the set.
- Any data, including, but not limited to application circuit diagrams information, described herein are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO.,LTD. disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices, other than for buyer's right to use such devices itself, resell or
 otherwise dispose of the same, no express or implied right or license to practice or commercially
 exploit any intellectual property rights or other proprietary rights owned or controlled by
- ROHM CO., LTD. is granted to any such buyer.
- Products listed in this document are no antiradiation design.

The products listed in this document are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys).

Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

About Export Control Order in Japan

Products described herein are the objects of controlled goods in Annex 1 (Item 16) of Export Trade Control Order in Japan.

In case of export from Japan, please confirm if it applies to "objective" criteria or an "informed" (by MITI clause) on the basis of "catch all controls for Non-Proliferation of Weapons of Mass Destruction.



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Optical Switches, Transmissive, Photo IC Output category:

Click to view products by ROHM manufacturer:

Other Similar products are found below:

EESX4009P1MID1 EE-SMR3-1T GP1A51HRJ00F OPB12805 HOA6991-500 EE-SX460-P1 OPB960N11 OPB120B OPB121B

OPB916BZ HOA0961-N51 HOA0963-T51 HOA0973-N51 HOA0973-T51 HOA2006-001 HOA2007-001 HOA6961-T51 HOA6971-T55

HOA6972-T51 HOA6981-L55 HOA6981-T51 HOA6982-T51 HOA6990-L51 HOA6991-L51 HOA6991-T51 HOA6991-T55 HOA6992
L51 HOA6992-N55 EE-SA407-P2 EE-SPX303-N EE-SX3009-P1 EE-SX301 EE-SX305 EE-SX3070 EE-SX3081 EE-SX3096-W11 EE
SX3160-W11 EE-SX3161-W11 EE-SX3162-P1 EE-SX3162-P1-Z EE-SX3162-P2 EE-SX3163-P1 EE-SX3163-P2 EE-SX3164-P1 EE
SX3239-P2 EE-SX3340 EE-SX384 EE-SX398 EE-SX4009-P1 EE-SX4009-P10