
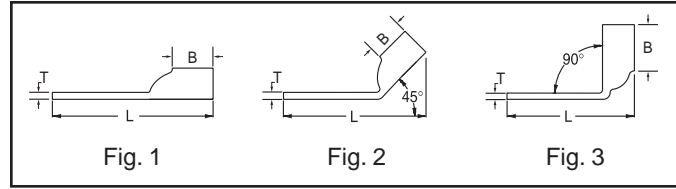


TWO HOLE HYLUG™ CODE CONDUCTOR STANDARD BARREL (Continued)



C-48

Catalog Number	Fig #	Conductor		Stud Hole Size	Stud Hole Spacing	Tongue Width	Figure Dimensions			▲ Installation Tooling					Wire Strip Length																
		AWG	*** MM ²				(B)	(T)	(L)	Dieless (# of crimps)	Mechanical MD6, OUR840, MD7-34R	Hydraulic BCT500HS, Y500CTHS	Y35, Y39, Y750, Y46*, PAT750	Color Code		Die Index															
YA32L-2TC38E5	1	400 kcmil		3/8"	1-1/16"	1.40"	1.19"	.19"	3.75"	Y644M (1)	W32VT (2)	W32VT (2) W32RT (2)	U32RT (2) U30ART (2)	Blue	19	1-1/4"															
YA32L-2TC38E5-45	2						1.19"	.19"	3.66"																						
YA32L-2TC38E5-90	3						1.19"	.19"	2.52"																						
YA32L-2TC38				3/8"	1"	1.38"	1.19"	.19"	3.69"																						
YA32-2L	1			450 kcmil		3/8"	1"	1.40"	1.19"								.19"	3.75"	W33VT (2)	W33VT (2) W33RT (2)	U33RT (2)	Gray	326	1-9/16"							
YA32-2L-45	2								1.19"								.19"	3.66"													
YA32-2L-90	3								1.19"								.19"	2.52"													
YA33-2LN	1					1/2"	1-3/4"	1.48"	1.50"								.21"	5.23"													
YA33-2LN-45	2					1/2"	1-3/4"	1.48"	1.50"								.21"	5.10"													
YA33-2LN-90	3	1/2"	1-3/4"			1.48"	1.50"	.21"	3.70"																						
YA342LN	1	500 kcmil	240	1/2"	1-3/4"	1.52"	1.27"	.23"	5.06"	W34VT (2)	W34VT (2) W34RT (2)	U34RT (2) U31ART (2)	Brown	20	1-7/16"																
YA342LN-45	2						1.27"	.23"	5.00"																						
YA342LN-90	3						1.27"	.23"	3.73"																						
YA34L-2TC12	1			1/2"	1-1/4"	1.52"	1.27"	.23"	1.27"							.23"	4.38"														
YA34L-2TC12-45	2								1.27"							.23"	4.31"														
YA34L-2TC12-90	3								1.27"							.23"	3.04"														
YA34L-2TC14E2	1								1/4"							3/4"	1.52"	1.27"	.23"	1.27"	.23"	3.44"									
YA34L-2TC14E2-45	2																			1.27"	.23"	3.37"									
YA34L-2TC14E2-90	3																			1.27"	.23"	2.10"									
YA34L-2TC38	1			3/8"	1"	1.52"	1.27"	.23"												1.27"	.23"	3.88"									
YA34L-2TC38-45	2																			1.27"	.23"	3.81"									
YA34L-2TC38-90	3																			1.27"	.23"	2.54"									
YA34-2L	1			3/8"	1"	1.55"	1.27"	.23"	1.27"							.23"	3.94"														
YA34-2L-45	2								1.27"							.23"	3.87"														
YA34-2L-90	3								1.27"							.23"	2.59"														
YA35-2L	1			550 kcmil		3/8"	1-1/8"	1.65"	1.69"							.25"	4.64"	-	-	U35RT (2)	Yellow	21	1-3/4"								
YA35-2L-45	2								1.69"							.25"	3.95"														
YA35-2L-90	3								1.69"							.25"	2.60"														
YA35-2LN	1	1/2"	1-3/4"			1.65"	1.69"	.25"	1.69"	.25"	5.07"																				
YA35-2LN-45	2								1.69"	.25"	3.73"																				
YA35-2LN-90	3								1.69"	.25"	3.73"																				
YA362LN	1								600 kcmil	300	1/2"	1-3/4"	1.74"	1.38"	.27"	4.36"															
YA362LN45	2													1.38"	.27"	5.21"															
YA362LN90	3													1.38"	.27"	3.81"															
YA36L-2TC38	1	3/8"	1"	1.73"	1.38"	.27"	1.38"	.27"			4.23"																				
YA36L-2TC38-45	2						1.38"	.27"			4.21"																				
YA36L-2TC38-90	3						1.38"	.27"			2.81"																				
YA37-2L	1	650 kcmil		3/8"	1-1/8"	1.80"	1.39"	.27"	4.40"	-	-	U37RT (2)	Orange	23	1-15/16"																
YA37-2L-45	2						1.39"	.27"	4.37"																						
YA37-2L-90	3						1.39"	.27"	2.96"																						
YA37-2LN	1			1/2"	1-3/4"	1.80"	1.39"	.27"	1.39"							.27"	5.27"														
YA37-2LN-45	2								1.39"							.27"	5.25"														
YA37-2LN-90	3								1.39"							.27"	3.84"														
YA38-2L	1								700 kcmil								3/8"	1-1/8"	1.84"	1.45"	.27"	4.48"									
YA38-2L-45	2																			1.45"	.27"	4.42"									
YA38-2L-90	3																			1.45"	.27"	3.23"									
YA38-2LN	1	1/2"	1-3/4"	1.81"	1.45"	.27"	1.45"	.27"		5.35"																					
YA38-2LN-45	2						1.45"	.27"		5.29"																					
YA38-2LN-90	3						1.45"	.27"		3.84"																					

-- Color code not assigned.

▲ See tooling section of this catalog for complete tool and die listings.

◆ For applications greater than 2000 volts consult cable manufacturer for voltage stress relief instructions.

* Use PUADP-1 adapter with "U" dies in Y46 HYPRESS™.

** P-RT die sets for use in Y46 HYPRESS™ only, PUADP-1 adapter not required.

*** The MM² conductor sizes listed are the recommendations for Class 2 conductor.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Terminals](#) category:

Click to view products by [FCT Electronics](#) manufacturer:

Other Similar products are found below :

[HT-13-10](#) [71M-250-32-NB](#) [01-2065-1-0216](#) [00581P0075](#) [M10-10RX](#) [M10BCK](#) [60205-1](#) [604200-1](#) [60598-1-CUT-TAPE](#) [60617-1-C](#) [60873-1](#) [M14-516R/SK](#) [M14-6RSX](#) [M18-10FLX](#) [M18-8FBX](#) [M18-8R/LX](#) [M18BCK](#) [61314-6-C](#) [61-S](#) [61-SN-A](#) [62-NBM-A](#) [63-S](#) [640179-1](#) [640917-2-CUT-TAPE](#) [6501550002](#) [66107-2-C](#) [696683-1](#) [696834-1](#) [696861-1](#) [696931-1](#) [696999-1](#) [M8-516RK](#) [M86700006](#) [MA250DMFMX-A](#) [701-2007](#) [701-2307](#) [701-7761-03](#) [70F-110-32-PB](#) [718-N-A](#) [71M-187-20-NBL](#) [71M-250-32-NBL](#) [72F-187-20-NBL](#) [72M-250-32-NBL](#) [7310](#) [73F-250-32](#) [73F-250-32-NBL](#) [73F-250-32-NL](#) [F14-10C](#) [F-1M](#) [751-250](#)