IR Receiver Module

RPM7140-R series

RPM7140-R series are remote control receiver modules. Small-sized, light-weight, and low current consumption modules have been achieved by using resin mold.

●Center frequency

40.0kHz

Applications

All household electric appliances such as TV, DVD, air conditioner and audio equipment.

● Features

- 1) Low current consumption. (0.95mA Typ.)
- 2) High ripple rejection.
- 3) 5 types of holders available for each set.

●RPM7140-R series

	Straight type RSIP-A3	L forming RSIP-A3 V4	with holders					
			SIDE VIEW RSIP-A3 (H13)	SIDE VIEW RSIP-A3 (H5)	TOP VIEW RSIP-A3 (H4)	TOP VIEW RSIP-A3 (H8)	TOP VIEW RSIP-A3 (H9)	
Height to lens	5.5mm	4.8mm	15.0mm	9.6mm	15.9mm	7.2mm	12.0mm	
Products No.	RPM7140-R	RPM7140-V4R	RPM7140-H13R	RPM7140-H5R	RPM7140-H4R	RPM7140-H8R	RPM7140-H9R	


● Absolute maximum ratings (Ta = 25°C)

Parameter	Symbol	Limits	Unit
Supply Voltage	Vcc	6.3	V
Output Current	lo	2.0	mA
Storage temperature	Tstg	-30 to +100	°C
Operating temperature	Topr	-10 to +75	°C

● Recommended operating conditions (Ta = 25°C)

Parameter	Symbol	Min.	Тур.	Max.	Unit
Supply Voltage	Vcc	4.5	5.0	5.5	٧

Block diagram

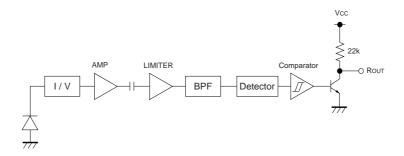

Terminal description

Pin No.	Pin name	Function			
1	Rоит	OUTPUT TERMINAL			
2	GND	GROUND			
3 Vcc		POWER SUPPLY			




● Electrical, Optical characteristics (Unless otherwise noted, Ta = 25°C Vcc=5V)

Parameter	Symbol	Min.	Тур.	Max.	Unit	Conditions
Consumption Current	Icc	-	0.95	1.5	mA	No outside light, No signal input
Effective Distance	L	8	15	-	m	Outer light condition Ee < 10 (lx) *1
High Level Output Voltage	Vн	4.5	_	_	V	*1
Low Level Output Voltage	VL	_	_	0.5	V	Isink≦200μA *1
ON Pulse Width	Ton	400	600	800	μs	Outer light condition Ee < 10 (lx) *1
OFF Pulse Width	Toff	400	600	800	μs	Outer light condition Ee < 10 (lx) *1
Center frequency	fo	_	40.0	_	kHz	
Horizontal half angle	θ 1/2	_	45	_	deg	*2
Vertical half angle	θ 1/2	_	35	-	deg	*2

^{*1 600/600}µs burst wave is transmitted by standard transmitter. However, it must be measured after the initial transmission pulse is 10 pulse. *2 It is an angle when the linear arrival distance become half.

Measurement Conditions

(1) Transmit signal



Carrier frequency=fo, Duty=50%

Fig.1 Transmit signal

(2) Standard transmitter

 λ peak=940nm λ Δ =40nm

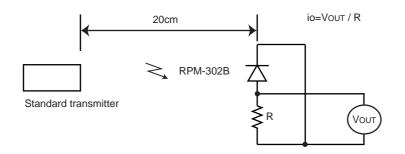


Fig.2 Measurement of standard transmitter proofreading

When standard transmitter output the signal at Fig.1 standard photodiode output become io= 5μ Ap-p under the measurement condition Fig.2.

(The radiant intensity of standard transmitter: 50mW/sr)

RPM-302B : standard photodiode has short current Isc=27 μ A at E=1000(Ix) (using CIE standard light source A)

(3) Measurement effective distance, horizontal & vertical half angle

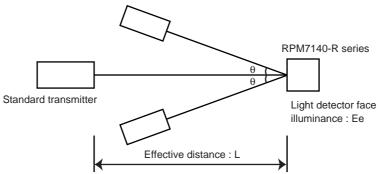


Fig.3 Measurement condition for effective distance

 $(\boldsymbol{\theta}$; Indicates horizontal and vertical directions)

Effective distance L : Effective distance at $\theta\text{=}0^{\circ}$ Fig.3

Horizontal & vertical half angle $\theta \quad \ : \quad$ The angle which effective distance became 50% of L.

(4) Output signal

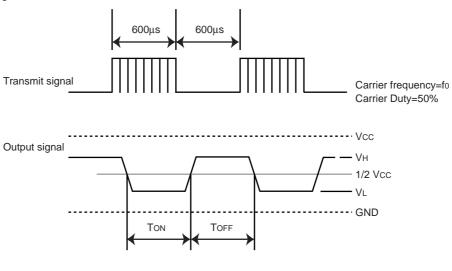


Fig.4

(5) Measurement circuit for the output voltage and the consumption current

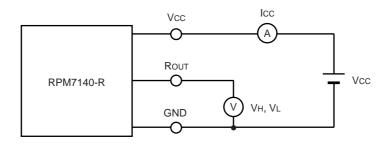


Fig.5

•How to use the receiver without holder

Please use the receiver with shield case or shield plate as an EMI noise measures.

(Shield case and shield plate are required to be grounded.)

Because internal or external noise (CRT, fluorescent tube, motor, LCD backlight) of the receiver may cause malfunction like a reduced effective distance.

(In the case of internal and external noise are strong, please use RPM7140-HxR series with holder.)

Notes

- (1) All characteristics of the receiver in this specification are specified by supplying burst wave form (Fig.1) with ROHM standard transmitter (Fig.2).
 - If in case of other burst wave form will be used, please check these spec. Carefully under the evaluations.
- (2) When the receiver will be used as the wire-less remote controller, please use the signal method the signal format which refer to "Measures to prevent malfunctioning of IR remote-controlled electric home appliances". (Published July 1987 by Association of Electric Home Appliances)
 - If using other signal method, signal format, (ex: signal format which not including the leader signal) the receiver might have chances to miss-function.
- (3) Please set up transmitter's carrier frequency as same as the receiver's fo frequency. Otherwise error might be occurred
- (4) If transmission signal has non-continues carrier, error might be occurred. Continuous carrier is necessary.



- (5) The receiver was designed to use as in-door use only.

 Therefore, please understand that the receiver cannot cover all characteristics, in case of using it out-door.
- (6) Noise environment (Light noise from inverter Lamp, and other kind of Lamps, Power ripple, electromagnetic noise from power circuit, and etc.) may cause a reduced effective distance.
- (7) The receiver may not work properly if receiving signal judgment is done by single pulse due to the surrounding / environmental noises.
 - To prevent such misjudgment, please make sure that the receiver is set up to work only when receiving series of coded signal.
- (8) Emitting unit (remote control transmitter) has to be considered about its emitting device function, characteristics and characteristics of the receiver.
- (9) Please connect 'Holder' on to the 'Ground (GND)' of PCB. If the holder is not connected to the GND, there is a possibility of worsening the characteristics of product.
- (10) Do not supply unnecessary stress to lead.
- (11) Please pay careful attention to the lens.

 It might have a chance to miss-function when the lens get dust or dirty. And also please do not touch the lens.
- (12) In order to prevent products from ESD, human body and solder iron, etc. are required to be grounded.



•Electrical and optical characteristics curves




Fig.6 BPF characteristic




Fig.7 Optical bandwidth of the photo-diode encapsulation




Fig.8 Direction characteristic (Horizontal direction)





Fig.9 Direction characteristic (Vertical direction)

●Dimensions (Unit:mm)

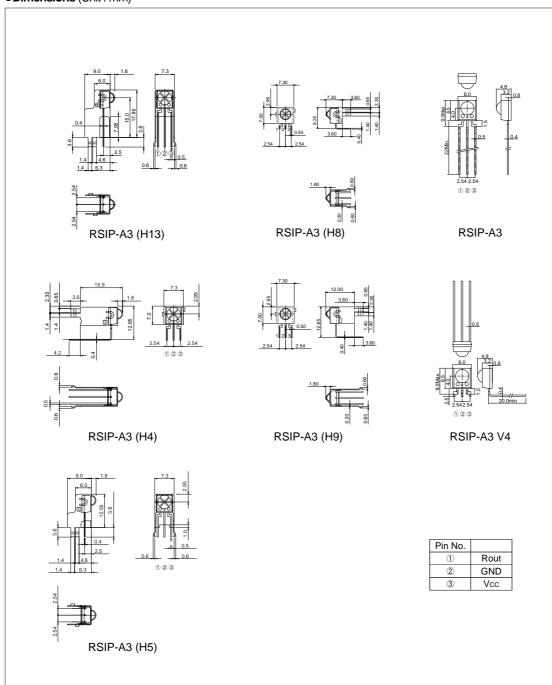

ROHM

Notes

- No technical content pages of this document may be reproduced in any form or transmitted by any
 means without prior permission of ROHM CO.,LTD.
- The contents described herein are subject to change without notice. The specifications for the
 product described in this document are for reference only. Upon actual use, therefore, please request
 that specifications to be separately delivered.
- Application circuit diagrams and circuit constants contained herein are shown as examples of standard use and operation. Please pay careful attention to the peripheral conditions when designing circuits and deciding upon circuit constants in the set.
- Any data, including, but not limited to application circuit diagrams information, described herein are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO.,LTD. disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices, other than for buyer's right to use such devices itself, resell or
 otherwise dispose of the same, no express or implied right or license to practice or commercially
 exploit any intellectual property rights or other proprietary rights owned or controlled by
- ROHM CO., LTD. is granted to any such buyer.
- Products listed in this document are no antiradiation design.

The products listed in this document are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys).

Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

About Export Control Order in Japan

Products described herein are the objects of controlled goods in Annex 1 (Item 16) of Export Trade Control Order in Japan.

In case of export from Japan, please confirm if it applies to "objective" criteria or an "informed" (by MITI clause) on the basis of "catch all controls for Non-Proliferation of Weapons of Mass Destruction.



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Infrared Receivers category:

Click to view products by ROHM manufacturer:

Other Similar products are found below:

TSOP38436 TSOP6136TR TSOP2456 TSOP31456 TSOP34356 TSOP34456 TSOP38336 TSOP6130TT GP1UX511QS TSOP34336SS1F

TSSP57038ETT1 TSOP57438ETT1 TSOP37438HTT1 TSOP6140TR TSOP53356 TSOP53238 TSOP33238 TSOP33256 TSOP53256

TSOP33138 TSOP6133TT HL-PST-1608PT1F TSOP37540QHTT1 E6C0805PRAC1UDA TSOP31136 TSOP31140 TSOP75238WTT

RPM5537-H14E2A RPM6937-V4 RPM7136-H4R RPM7238-H5R TSOP4156 TSOP6156TR TSOP75336WTT TSOP75338TR

TSSP77038TT PD70-01C/TR7 TSSP57P38TT1 GP1UE292QKVF GP1UM281XKVF GP1UM287KKVF GP1UM287XK TSOP59438

TSOP58336 TSOP38156 PT19-21B/L41/TR8 PD15-22C/TR8 TSOP75538WTT TSOP37438ETT1 TSOP39336TR1