


# SCS308AP SiC Schottky Barrier Diode

V <sub>R</sub>	650V
I <sub>F</sub>	8A
Q <sub>C</sub>	21nC


## Features

- 1) Shorter recovery time
- 2) Reduced temperature dependence
- 3) High-speed switching possible
- 4) High surge current capability

## Outline



## Inner circuit



## Packaging specifications

	Packaging	Tube
	Reel size (mm)	-
Tuno	Tape width (mm)	-
Type Basic ordering unit (pcs)		50
	Packing code	C9
	Marking	SCS308AP

## Construction

Silicon carbide epitaxial planar type

## •Absolute maximum ratings $(T_i = 25^{\circ}C)$

Parameter		Symbol	Value	Unit
Reverse voltage (re	epetitive peak)	V <sub>RM</sub>	650	V
Reverse voltage (D	C)	V <sub>R</sub>	650	V
Continuous forward	I current $(T_c = 135^{\circ}C)$	I <sub>F</sub>	8	А
Surge non-	PW=10ms sinusoidal, T <sub>j</sub> =25°C		67	А
repetitive forward	PW=10ms sinusoidal, T <sub>j</sub> =150°C	I <sub>FSM</sub>	57	А
current	PW=10μs square, T <sub>j</sub> =25°C		250	А
Repetitive peak forward current		I <sub>FRM</sub>	36 * <sup>1</sup>	А
$i^{2}t$ value $1 \leq PW \leq 10ms, T_{j}=25^{\circ}C$ $1 \leq PW \leq 10ms, T_{j}=150^{\circ}C$		<b>f</b> .2	22	A <sup>2</sup> s
		∫ i <sup>2</sup> dt	16	A <sup>2</sup> s
Total power disspation		P <sub>D</sub>	57 *²	W
Junction temperature		Tj	175	°C
Range of storage temperature		T <sub>stg</sub>	-55 to +175	°C

\*1  $T_c$ =100°C,  $T_i$ =150°C, Duty cycle=10% \*2  $T_c$ =25°C

## •Electrical characteristics $(T_j = 25^{\circ}C)$


Doromotor	Cumhal	Conditions	Values			L La H	
Parameter	Symbol	Conditions	Min.	Тур.	Max.	Unit	
DC blocking voltage	V <sub>DC</sub>	I <sub>R</sub> =50μΑ	650	-	-	V	
		I <sub>F</sub> =8A, T <sub>j</sub> =25°C	-	1.35	1.50	V	
Forward voltage	$V_{F}$	I <sub>F</sub> =8A, T <sub>j</sub> =150°C	-	1.44	1.71	V	
		I <sub>F</sub> =8A, T <sub>j</sub> =175°C	-	1.50	-	V	
Reverse current	I <sub>R</sub>	V <sub>R</sub> =650V, T <sub>j</sub> =25°C	-	0.024	40	μA	
		V <sub>R</sub> =650V, T <sub>j</sub> =150°C	-	1.6	160	μΑ	
		V <sub>R</sub> =650V, T <sub>j</sub> =175°C	-	4.8	-	μΑ	
Total capacitance	С	V <sub>R</sub> =1V, f=1MHz	-	400	-	pF	
		V <sub>R</sub> =650V, f=1MHz	-	36	-	pF	
Total capacitive charge	Q <sub>C</sub>	V <sub>R</sub> =400V, di/dt=350A/µs	-	21	-	nC	
Switching time	t <sub>C</sub>	V <sub>R</sub> =400V, di/dt=350A/µs	-	15	-	ns	
Non-repetetive Avaranche Energy	E <sub>ava</sub>	L=1mH	-	110	-	mJ	

## •Thermal characteristics

Parameter	Symbol	Conditions	Values			Unit
Farameter	Symbol		Min.	Тур.	Max.	Offic
Thermal resistance	R <sub>th(j-c)</sub>	-	-	1.8	2.6	°C/W

## •Typical Transient Thermal Characteristics

Symbol	Value	Unit	Symbol	Value	Unit
R <sub>th1</sub>	1.89E-02		C <sub>th1</sub>	1.95E-04	
R <sub>th2</sub>	1.81E-01	K/W	C <sub>th2</sub>	8.01E-04	Ws/K
R <sub>th3</sub>	1.55E+00		C <sub>th3</sub>	1.82E-03	

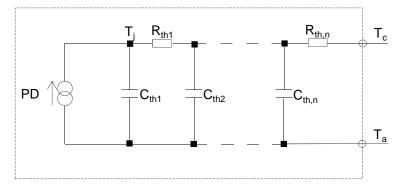

## Electrical characteristic curves

Fig.1  $V_F$  -  $I_F$  Characteristics



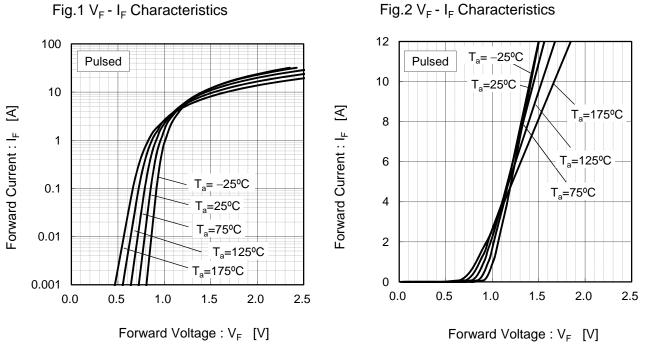


Fig.3  $V_R$  -  $I_R$  Characteristics

Fig.4  $V_R$ -C<sub>t</sub> Characteristics

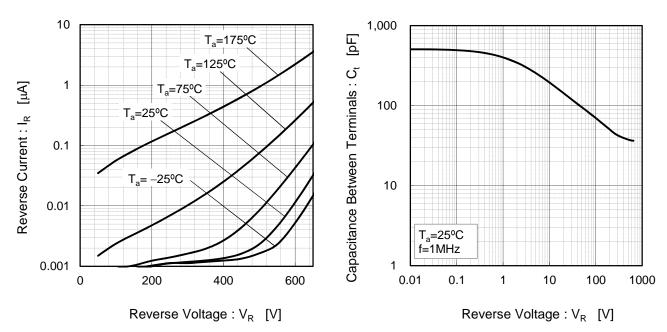


## •Electrical characteristic curves

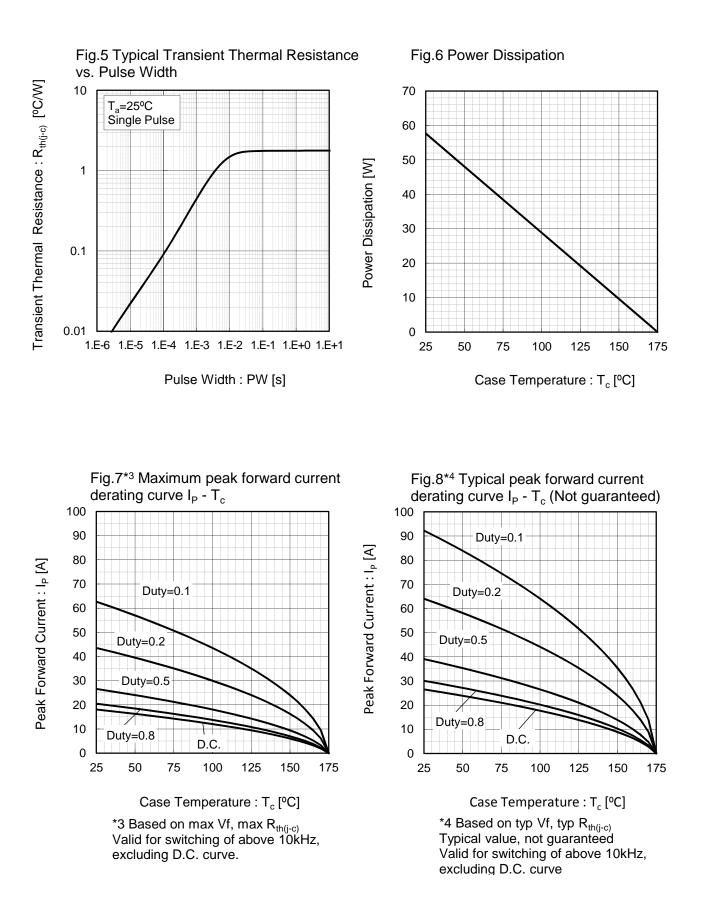

600


400

## Electrical characteristic curves

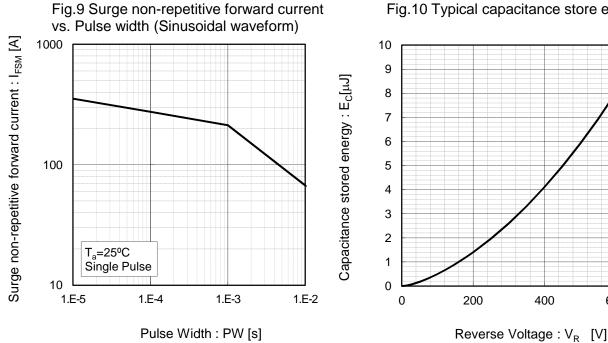

## •Symplified forward characteristic model

Fig.11 Equivalent forward current curve



Forward Voltage : V<sub>F</sub>

$V_F =$	$V_{th}$	+	$R_{diff}$	$I_{F}$
---------	----------	---	------------	---------

 $V_{th}(T_i) = a_0 + a_1 T_i$  $R_{diff}(T_j) = b_0 + b_1 T_j + b_2 T_j^2$ 

Symbol	Typical Value	Unit
a <sub>0</sub>	9.66E-01	V
a <sub>1</sub>	-1.10E-03	V/°C
b <sub>0</sub>	4.40E-02	Ω
b <sub>1</sub>	9.33E-05	Ω/°C
b <sub>2</sub>	9.60E-07	$\Omega/^{\circ}C^{2}$

 $T_{j}$  in °C; -55 °C <  $T_{j}$  <175 °C ;  $I_{F}$  <16A

Fig.10 Typical capacitance store energy

<ul> <li>tions :</li> <li>3) Although ROHM is continuously working to improve product reliability and quality, semic ductors can break down and malfunction due to various factors. Therefore, in order to prevent personal injury of fire arising from failure, please take sa measures such as complying with the derating characteristics, implementing redundant fire prevention designs, and utilizing backups and fail-safe procedures. ROHM shall have responsibility for any damages arising out of the use of our Poducts beyond the rating specifier ROHM.</li> <li>4) Examples of application circuits, circuit constants and any other information contained herein provided only to illustrate the standard usage and operations of the Products. The periph conditions must be taken into account when designing circuits for mass production.</li> <li>5) The technical information specified herein is intended only to show the typical functions of examples of application circuits for the Products. ROHM does not grant you, explicitly or implic any license to use or exercise intellectual property or other rights held by ROHM or any o parties. ROHM shall have no responsibility whatsoever for any dispute arising out of the use such technical information.</li> <li>6) The Products specified in this document are not designed to be radiation tolerant.</li> <li>7) For use of our Products in applications requiring a high degree of reliability (as exempli below), please contact and consult with a ROHM representative : transportation equipment cars, ships, trains), primary communication equipment, traffic lights, fire/crime prevention, sa equipment, nuclear power control systems, and submarine repeaters.</li> <li>8) Do not use our Products in applications requiring extremely high reliability, such as aerosp equipment, nuclear power control systems, and submarine repeaters.</li> <li>9) ROHM has used reasonable care to ensur the accuracy of the information contained in document. However, ROHM does not warrants that such information is error-free, and R</li></ul>		Notes
<ul> <li>tions :</li> <li>Although ROHM is continuously working to improve product reliability and quality, semic ductors can break down and malfunction due to various factors. Therefore, in order to prevent personal injury or fire arising from failure, please take sa measures such as complying with the derating characteristics, implementing redundant fire prevention designs, and utilizing backups and fail-safe procedures. ROHM shall have responsibility for any damages arising out of the use of our Poducts beyond the rating specified ROHM.</li> <li>Examples of application circuits, circuit constants and any other information contained herein provided only to illustrate the standard usage and operations of the Products. The periph conditions must be taken into account when designing circuits for mass production.</li> <li>The technical information specified herein is intended only to show the typical functions of examples of application circuits for the Products. ROHM does not grant you, explicitly or implice any license to use or exercise intellectual property or other rights held by ROHM or any o parties. ROHM shall have no responsibility whatsoever for any dispute arising out of the use such technical information.</li> <li>The Products specified in this document are not designed to be radiation tolerant.</li> <li>For use of our Products in applications requiring a high degree of reliability (as exempli below), please contact and consult with a ROHM representative : transportation equipment cars, ships, trains), primary communication equipment, traffic lights, fire/crime prevention, sa equipment, medical systems, and power transmission systems.</li> <li>Do not use our Products in applications requiring extremely high reliability, such as aerosp equipment, nuclear power control systems, and submarine repeaters.</li> <li>ROHM has used reasonable care to ensur the accuracy of the information contained in document. However, ROHM does not warrants that such information is error-free, and RO shall have no responsibil</li></ul>	1)	The information contained herein is subject to change without notice.
<ul> <li>ductors can break down and malfunction due to various factors. Therefore, in order to prevent personal injury or fire arising from failure, please take sa measures such as complying with the derating characteristics, implementing redundant fire prevention designs, and utilizing backups and fail-safe procedures. ROHM shall have responsibility for any damages arising out of the use of our Poducts beyond the rating specifier ROHM.</li> <li>4) Examples of application circuits, circuit constants and any other information contained herein provided only to illustrate the standard usage and operations of the Products. The periph conditions must be taken into account when designing circuits for mass production.</li> <li>5) The technical information specified herein is intended only to show the typical functions of examples of application circuits for the Products. ROHM does not grant you, explicitly or implic any license to use or exercise intellectual property or other rights held by ROHM or any o parties. ROHM shall have no responsibility whatsoever for any dispute arising out of the us such technical information.</li> <li>6) The Products specified in this document are not designed to be radiation tolerant.</li> <li>7) For use of our Products in applications requiring a high degree of reliability (as exemplibelow), please contact and consult with a ROHM representative : transportation equipment cars, ships, trains), primary communication equipment, traffic lights, fire/crime prevention, sa equipment, nuclear power control systems, and submarine repeaters.</li> <li>8) Do not use our Products in applications requiring extremely high reliability, such as aerosp equipment, nuclear power control systems, and submarine repeaters.</li> <li>9) ROHM shall have no responsibility for any damages or injury arising from non-compliance the recommended usage conditions and specifications contained herein.</li> <li>10) ROHM has used reasonable care to ensur the accuracy of the information contained in document. However, ROHM</li></ul>	2)	Before you use our Products, please contact our sales representative and verify the latest specifications :
<ul> <li>provided only to illustrate the standard usage and operations of the Products. The periph conditions must be taken into account when designing circuits for mass production.</li> <li>5) The technical information specified herein is intended only to show the typical functions of examples of application circuits for the Products. ROHM does not grant you, explicitly or implic any license to use or exercise intellectual property or other rights held by ROHM or any o parties. ROHM shall have no responsibility whatsoever for any dispute arising out of the use such technical information.</li> <li>6) The Products specified in this document are not designed to be radiation tolerant.</li> <li>7) For use of our Products in applications requiring a high degree of reliability (as exemplic below), please contact and consult with a ROHM representative : transportation equipment cars, ships, trains), primary communication equipment, traffic lights, fire/crime prevention, sa equipment, medical systems, and power transmission systems.</li> <li>8) Do not use our Products in applications requiring extremely high reliability, such as aerosp equipment, nuclear power control systems, and submarine repeaters.</li> <li>9) ROHM shall have no responsibility for any damages or injury arising from non-compliance of the recommended usage conditions and specifications contained herein.</li> <li>10) ROHM has used reasonable care to ensure the accuracy of the information contained in document. However, ROHM does not warrants that such information is error-free, and RO shall have no responsibility for any damages arising from any inaccuracy or misprint of s information.</li> <li>11) Please use the Products in accordance with any applicable environmental laws and regulatid such as the RoHS Directive. For more details, including RoHS compatibility, please contar ROHM sales office. ROHM shall have no responsibility for any damages arising tor any damages or losses resul non-compliance with any applicable laws or regulations.</li> <li>12) W</li></ul>	3)	Therefore, in order to prevent personal injury or fire arising from failure, please take safety measures such as complying with the derating characteristics, implementing redundant and fire prevention designs, and utilizing backups and fail-safe procedures. ROHM shall have no responsibility for any damages arising out of the use of our Poducts beyond the rating specified by
<ul> <li>examples of application circuits for the Products. ROHM does not grant you, explicitly or implic any license to use or exercise intellectual property or other rights held by ROHM or any or parties. ROHM shall have no responsibility whatsoever for any dispute arising out of the use such technical information.</li> <li>6) The Products specified in this document are not designed to be radiation tolerant.</li> <li>7) For use of our Products in applications requiring a high degree of reliability (as exemplible), please contact and consult with a ROHM representative : transportation equipment cars, ships, trains), primary communication equipment, traffic lights, fire/crime prevention, sa equipment, medical systems, and power transmission systems.</li> <li>8) Do not use our Products in applications requiring extremely high reliability, such as aerosp equipment, nuclear power control systems, and submarine repeaters.</li> <li>9) ROHM shall have no responsibility for any damages or injury arising from non-compliance of the recommended usage conditions and specifications contained herein.</li> <li>10) ROHM has used reasonable care to ensur the accuracy of the information contained in document. However, ROHM does not warrants that such information is error-free, and RO shall have no responsibility for any damages arising from any inaccuracy or misprint of s information.</li> <li>11) Please use the Products in accordance with any applicable environmental laws and regulated such as the ROHS Directive. For more details, including ROHS compatibility, please contate ROHM sales office. ROHM shall have no responsibility for any damages or losses resul non-compliance with any applicable laws or regulations.</li> <li>12) When providing our Products and technologies contained in this document to other country</li> </ul>	4)	Examples of application circuits, circuit constants and any other information contained herein are provided only to illustrate the standard usage and operations of the Products. The peripheral conditions must be taken into account when designing circuits for mass production.
<ol> <li>For use of our Products in applications requiring a high degree of reliability (as exempli below), please contact and consult with a ROHM representative : transportation equipment cars, ships, trains), primary communication equipment, traffic lights, fire/crime prevention, sa equipment, medical systems, and power transmission systems.</li> <li>Do not use our Products in applications requiring extremely high reliability, such as aerosp equipment, nuclear power control systems, and submarine repeaters.</li> <li>ROHM shall have no responsibility for any damages or injury arising from non-compliance of the recommended usage conditions and specifications contained herein.</li> <li>ROHM has used reasonable care to ensure the accuracy of the information contained in document. However, ROHM does not warrants that such information is error-free, and RO shall have no responsibility for any damages arising from any inaccuracy or misprint of s information.</li> <li>Please use the Products in accordance with any applicable environmental laws and regulation such as the RoHS Directive. For more details, including RoHS compatibility, please contain ROHM sales office. ROHM shall have no responsibility for any damages or losses result non-compliance with any applicable laws or regulations.</li> <li>When providing our Products and technologies contained in this document to other country.</li> </ol>	5)	The technical information specified herein is intended only to show the typical functions of and examples of application circuits for the Products. ROHM does not grant you, explicitly or implicitly, any license to use or exercise intellectual property or other rights held by ROHM or any other parties. ROHM shall have no responsibility whatsoever for any dispute arising out of the use of such technical information.
<ul> <li>below), please contact and consult with a ROHM representative : transportation equipment cars, ships, trains), primary communication equipment, traffic lights, fire/crime prevention, sa equipment, medical systems, and power transmission systems.</li> <li>8) Do not use our Products in applications requiring extremely high reliability, such as aerosp equipment, nuclear power control systems, and submarine repeaters.</li> <li>9) ROHM shall have no responsibility for any damages or injury arising from non-compliance of the recommended usage conditions and specifications contained herein.</li> <li>10) ROHM has used reasonable care to ensur the accuracy of the information contained in document. However, ROHM does not warrants that such information is error-free, and RO shall have no responsibility for any damages arising from any inaccuracy or misprint of s information.</li> <li>11) Please use the Products in accordance with any applicable environmental laws and regulation such as the RoHS Directive. For more details, including RoHS compatibility, please contact ROHM sales office. ROHM shall have no responsibility for any damages or regulations.</li> <li>12) When providing our Products and technologies contained in this document to other countril and the providing our Products and technologies contained in this document to other countril providing our Products and technologies contained in this document to other countril.</li> </ul>	6)	The Products specified in this document are not designed to be radiation tolerant.
<ul> <li>equipment, nuclear power control systems, and submarine repeaters.</li> <li>9) ROHM shall have no responsibility for any damages or injury arising from non-compliance of the recommended usage conditions and specifications contained herein.</li> <li>10) ROHM has used reasonable care to ensure the accuracy of the information contained in document. However, ROHM does not warrants that such information is error-free, and RO shall have no responsibility for any damages arising from any inaccuracy or misprint of s information.</li> <li>11) Please use the Products in accordance with any applicable environmental laws and regulation such as the RoHS Directive. For more details, including RoHS compatibility, please contain ROHM sales office. ROHM shall have no responsibility for any damages or losses result non-compliance with any applicable laws or regulations.</li> <li>12) When providing our Products and technologies contained in this document to other countril</li> </ul>	7)	For use of our Products in applications requiring a high degree of reliability (as exemplified below), please contact and consult with a ROHM representative : transportation equipment (i.e. cars, ships, trains), primary communication equipment, traffic lights, fire/crime prevention, safety equipment, medical systems, and power transmission systems.
<ul> <li>the recommended usage conditions and specifications contained herein.</li> <li>10) ROHM has used reasonable care to ensur the accuracy of the information contained in document. However, ROHM does not warrants that such information is error-free, and RO shall have no responsibility for any damages arising from any inaccuracy or misprint of s information.</li> <li>11) Please use the Products in accordance with any applicable environmental laws and regulations such as the RoHS Directive. For more details, including RoHS compatibility, please contact ROHM sales office. ROHM shall have no responsibility for any damages or losses result non-compliance with any applicable laws or regulations.</li> <li>12) When providing our Products and technologies contained in this document to other countril</li> </ul>	8)	Do not use our Products in applications requiring extremely high reliability, such as aerospace equipment, nuclear power control systems, and submarine repeaters.
<ul> <li>document. However, ROHM does not warrants that such information is error-free, and RO shall have no responsibility for any damages arising from any inaccuracy or misprint of s information.</li> <li>11) Please use the Products in accordance with any applicable environmental laws and regulated such as the RoHS Directive. For more details, including RoHS compatibility, please contact ROHM sales office. ROHM shall have no responsibility for any damages or losses result non-compliance with any applicable laws or regulations.</li> <li>12) When providing our Products and technologies contained in this document to other countril</li> </ul>	9)	ROHM shall have no responsibility for any damages or injury arising from non-compliance with the recommended usage conditions and specifications contained herein.
<ul> <li>such as the RoHS Directive. For more details, including RoHS compatibility, please contac ROHM sales office. ROHM shall have no responsibility for any damages or losses result non-compliance with any applicable laws or regulations.</li> <li>12) When providing our Products and technologies contained in this document to other countril</li> </ul>	10)	document. However, ROHM does not warrants that such information is error-free, and ROHM shall have no responsibility for any damages arising from any inaccuracy or misprint of such
	11)	such as the RoHS Directive. For more details, including RoHS compatibility, please contact a ROHM sales office. ROHM shall have no responsibility for any damages or losses resulting
	12)	you must abide by the procedures and provisions stipulated in all applicable export laws and regulations, including without limitation the US Export Administration Regulations and the Foreign
<ol> <li>This document, in part or in whole, may not be reprinted or reproduced without prior conser ROHM.</li> </ol>	13)	This document, in part or in whole, may not be reprinted or reproduced without prior consent of ROHM.



Thank you for your accessing to ROHM product informations. More detail product informations and catalogs are available, please contact us.

## ROHM Customer Support System

http://www.rohm.com/contact/

#### **General Precaution**

- 1. Before you use our Products, you are requested to care fully read this document and fully understand its contents. ROHM shall not be in an y way responsible or liable for failure, malfunction or accident arising from the use of a ny ROHM's Products against warning, caution or note contained in this document.
- 2. All information contained in this docume nt is current as of the issuing date and subject to change without any prior notice. Before purchasing or using ROHM's Products, please confirm the latest information with a ROHM sale s representative.
- 3. The information contained in this document is provided on an "as is" basis and ROHM does not warrant that all information contained in this document is accurate an d/or error-free. ROHM shall not be in an y way responsible or liable for any damages, expenses or losses incurred by you or third parties resulting from inaccuracy or errors of or concerning such information.

# **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Schottky Diodes & Rectifiers category:

Click to view products by ROHM manufacturer:

Other Similar products are found below :

MA4E2039 D1FH3-5063 MBR0530L-TP MBR10100CT-BP MBR1545CT MMBD301M3T5G RB160M-50TR RB551V-30 BAS16E6433HTMA1 BAT 54-02LRH E6327 NSR05F40QNXT5G NTE555 JANS1N6640 SB07-03C-TB-H SB1003M3-TL-W SK310-T SK32A-LTP SK33A-TP SK34B-TP SS3003CH-TL-E GA01SHT18 CRS10I30A(TE85L,QM MA4E2501L-1290 MBRB30H30CT-1G SB007-03C-TB-E SK32A-TP SK33B-TP SK35A-TP SK38B-TP NRVBM120LT1G NTE505 NTSB30U100CT-1G SS15E-TP VS-6CWQ10FNHM3 ACDBA1100LR-HF ACDBA1200-HF ACDBA140-HF ACDBA2100-HF ACDBA3100-HF CDBQC0530L-HF CDBQC0240LR-HF ACDBA340-HF ACDBA260LR-HF ACDBA1100-HF SK310B-TP MA4E2502L-1246 MA4E2502H-1246 NRVBM120ET1G NSR01L30MXT5G NTE573