


TLS2200® Materials

BradyID.com/tls2200

Polyester Labels for General Industrial ID (B-422, B-423, B-430, B-432, B-483, B-489, B-498)

White or clear label stock with choice of finish and adhesives for smooth or rough surfaces. Use for a wide variety of asset identification, panel labeling and general ID.

Portable Printers

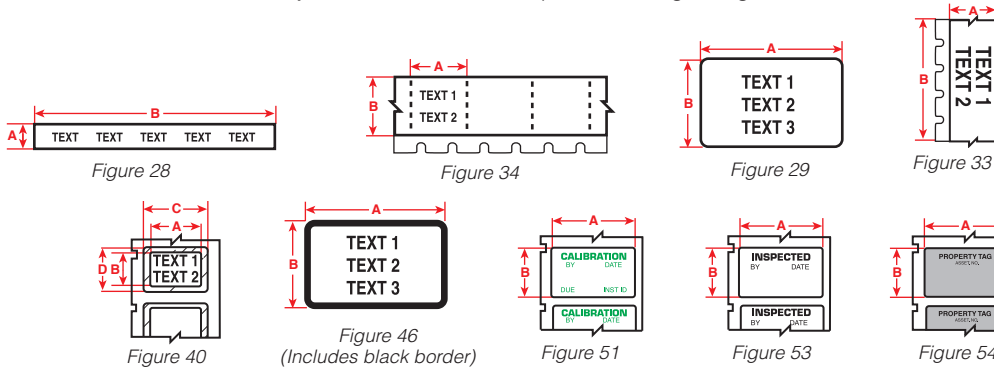

Fits Printer Models	Diagram	Catalog #	B-#	Material	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
Standard adhesive (B-423 gloss white):										
TLS, BMP71*	Fig. 29	PTL-1-423	B-423	Polyester	White	0.250 (6.4)	0.250 (6.4)	1	750	R6010
TLS, BMP71*	Fig. 29	PTL-3-423	B-423	Polyester	White	0.375 (9.5)	0.375 (9.5)	1	500	R6010
TLS, BMP71*	Fig. 29	PTL-4-423	B-423	Polyester	White	0.400 (10.6)	0.400 (10.2)	1	500	R6010
TLS, BMP71*	Fig. 29	PTL-5-423	B-423	Polyester	White	0.500 (12.7)	0.200 (5.1)	1	750	R6010
TLS, BMP71*	Fig. 53	PTL-6-423	B-423	Polyester	White	0.500 (12.7)	0.275 (7.0)	1	750	R6010
TLS, BMP71*	Fig. 29	BM71-7-423	B-423	Polyester	White	0.500 (12.7)	0.500 (12.7)	1	5000	R6010
TLS, BMP71*	Fig. 29	PTL-7-423	B-423	Polyester	White	0.500 (12.7)	0.500 (12.7)	1	500	R6010
TLS, BMP71*	Fig. 33	PTL-8-423	B-423	Polyester	White	0.500 (12.7)	50 ft. (15.2 m)	1	1 Roll Cont.	R6010
TLS, BMP71*	Fig. 29	PTL-9-423	B-423	Polyester	White	0.650 (16.5)	0.200 (5.1)	1	750	R6010
TLS, BMP71*	Fig. 29	PTL-10-423	B-423	Polyester	White	0.750 (19.1)	0.250 (6.4)	1	750	R6010
TLS, BMP71*	Fig. 29	PTL-13-423	B-423	Polyester	White	0.900 (22.9)	0.250 (6.4)	1	750	R6010
TLS, BMP71*	Fig. 29	PTL-14-423	B-423	Polyester	White	1.000 (25.4)	0.187 (4.8)	1	750	R6010
TLS, BMP71*	Fig. 29	PTL-15-423	B-423	Polyester	White	1.000 (25.4)	0.275 (7.0)	1	750	R6010
TLS, BMP71*	Fig. 29	BM71-16-423	B-423	Polyester	White	1.000 (25.4)	0.375 (9.5)	1	5000	R6010
TLS, BMP71*	Fig. 29	PTL-16-423	B-423	Polyester	White	1.000 (25.4)	0.375 (9.5)	1	500	R6010
TLS, BMP71*	Fig. 29	BM71-17-423	B-423	Polyester	White	1.000 (25.4)	0.500 (12.7)	1	5000	R6010
TLS, BMP71*	Fig. 29	PTL-17-423	B-423	Polyester	White	1.000 (25.4)	0.500 (12.7)	1	500	R6010
TLS, BMP71*	Fig. 29	BM71-19-423	B-423	Polyester	White	1.000 (25.4)	1.000 (25.4)	1	2500	R6010
TLS, BMP71*	Fig. 29	PTL-19-423	B-423	Polyester	White	1.000 (25.4)	1.000 (25.4)	1	250	R6010
TLS, BMP71*	Fig. 29	BM71-20-423	B-423	Polyester	White	1.000 (25.4)	2.000 (50.8)	1	1000	R6010
TLS, BMP71*	Fig. 46	PTL-24-423-BK	B-423	Polyester	White	1.130 (28.7)	0.500 (12.7)	1	500	R6010
TLS, BMP71*	Fig. 29	PTL-25-423	B-423	Polyester	White	1.250 (31.8)	0.250 (6.4)	1	750	R6010
TLS, BMP71*	Fig. 29	PTL-27-423	B-423	Polyester	White	1.500 (38.1)	0.125 (3.2)	1	750	R6010
TLS, BMP71*	Fig. 29	PTL-28-423	B-423	Polyester	White	1.500 (38.1)	0.250 (6.4)	1	750	R6010
TLS, BMP71*	Fig. 29	BM71-29-423	B-423	Polyester	White	1.500 (38.1)	0.500 (12.7)	1	5000	R6010
TLS, BMP71*	Fig. 29	PTL-29-423	B-423	Polyester	White	1.500 (38.1)	0.500 (12.7)	1	500	R6010
TLS, BMP71*	Fig. 51	PTL-30-423-CALI	B-423	Polyester	White	1.500 (38.1)	0.750 (19.1)	1	250	R6010
TLS, BMP71*	Fig. 29	PTL-31-423	B-423	Polyester	White	1.500 (38.1)	1.000 (25.4)	1	250	R6010
TLS, BMP71*	Fig. 29	PTL-32-423	B-423	Polyester	White	1.500 (38.1)	1.500 (38.1)	1	250	R6010
TLS, BMP71*	Fig. 29	PTL-2-423	B-423	Polyester	White	2.000 (50.8)	0.250 (6.4)	1	100	R6010
TLS, BMP71*	Fig. 29	PTL-20-423	B-423	Polyester	White	2.000 (50.8)	1.000 (25.4)	1	100	R6010
TLS, BMP71*	Fig. 29	PTL-26-423	B-423	Polyester	White	2.750 (69.9)	1.250 (31.8)	1	100	R6010
TLS, BMP71*	Fig. 29	PTL-22-423	B-423	Polyester	White	3.000 (76.2)	1.000 (25.4)	1	100	R6010
TLS, BMP71*	Fig. 29	PTL-37-423	B-423	Polyester	White	3.000 (76.2)	1.900 (48.3)	1	100	R6010
TLS, BMP71*	Fig. 29	PTL-23-423	B-423	Polyester	White	4.000 (101.6)	1.000 (25.4)	1	100	R6010
TLS, BMP71*	Fig. 29	PTL-38-423	B-423	Polyester	White	4.000 (101.6)	1.900 (48.3)	1	100	R6010
Standard adhesive (B-430 clear):										
TLS, BMP71*	Fig. 33	PTL-46-430	B-430	Polyester	Clear	0.375 (9.5)	50 ft. (15.2 m)	1	1 Roll Cont.	R6010
TLS, BMP71*	Fig. 53	PTL-6-430	B-430	Polyester	Clear	0.500 (12.7)	0.275 (7.0)	1	750	R6010
TLS, BMP71*	Fig. 29	PTL-44-430	B-430	Polyester	Clear	0.500 (12.7)	0.375 (9.5)	1	500	R6010
TLS, BMP71*	Fig. 29	PTL-7-430	B-430	Polyester	Clear	0.500 (12.7)	0.500 (12.7)	1	500	R6010
TLS, BMP71*	Fig. 33	PTL-8-430	B-430	Polyester	Clear	0.500 (12.7)	50 ft. (15.2 m)	1	1 Roll Cont.	R6010
TLS, BMP71*	Fig. 29	PTL-16-430	B-430	Polyester	Clear	1.000 (25.4)	0.375 (9.5)	1	500	R6010
TLS, BMP71*	Fig. 29	PTL-17-430	B-430	Polyester	Clear	1.000 (25.4)	0.500 (12.7)	1	500	R6010
TLS, BMP71*	Fig. 33	PTL-42-430	B-430	Polyester	Clear	1.000 (25.4)	50 ft. (15.2 m)	1	1 Roll Cont.	R6010
TLS, BMP71*	Fig. 29	PTL-45-430	B-430	Polyester	Clear	1.050 (38.1)	0.375 (9.5)	1	500	R6010
TLS, BMP71*	Fig. 29	PTL-28-430	B-430	Polyester	Clear	1.500 (38.1)	0.250 (6.4)	1	750	R6010
TLS, BMP71*	Fig. 29	PTL-29-430	B-430	Polyester	Clear	1.500 (38.1)	0.500 (12.7)	1	500	R6010
TLS, BMP71*	Fig. 33	PTL-43-430	B-430	Polyester	Clear	1.900 (48.3)	50 ft. (15.2 m)	1	1 Roll Cont.	R6010

See all TLS2200® and PC Link™ Ribbon parts on page 323.

* Yellow media adaptor required for use in the BMP®71 printer. See page 324.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Wire Identification](#) category:

Click to view products by [Brady](#) manufacturer:

Other Similar products are found below :

[CU6337-000](#) [CU6342-000](#) [FCA-410-12](#) [11631010](#) [1-1768037-1](#) [1-1768037-2](#) [1-1768050-0](#) [PXLK-VI](#) [Q62184-1](#) [A64304-000](#) [QMT221](#)
[HK032WE1NF038B](#) [1330-0519-10](#) [1395199-1](#) [1395200-1](#) [1395202-1](#) [DMVF050WE-300S6](#) [D-SCE-1K-2.4-50-4-CS7834](#) [1538738-1](#)
[E90935-000](#) [EC1238-000](#) [EC1465-000](#) [EC1855-000](#) [EC1859-000](#) [EC1863-000](#) [EC5415-000](#) [EC7277-000](#) [EC7352-000](#) [EC7603-000](#)
[EC7707-000](#) [EC7735-000](#) [EC7768-000](#) [EC7828-000](#) [EC7854-000](#) [EC7952-000](#) [EC8128-000](#) [1768037-8](#) [1768041-7](#) [NC-127191-10-9](#)
[HS048WE2NF038B](#) [C03232-000](#) [HTCM-SCE-14-4H-9](#) [HTMS-3/16-9](#) [HT-SCE-1/4-2.0-4](#) [HT-SCE-3/16-2.0-4](#) [HTTMS-1/2-1.50-9](#) [HTTMS-](#)
[CM-1/2-4H-9](#) [HX-SCE-19.0-50-9](#) [HX-SCE-6.4-50-4](#) [C25254-000](#)