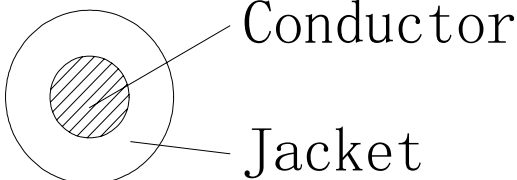


PAC

PTFE TYPE A Cable (20 AWG) Specification

19/0.20 SPC

Part No.:PTFE20A100

Cross Section	Performance														
	Electrical Characteristics: Spark Test: AC-1.5KV Dielectric Strength : AC-300V/60sec Conductor Resistance: 37 OHM/KM At 20°C Insulation Resistance: DC-500V 10 Mohm/KM At 20°C														
Packing															
As request															
Description															
Rated Temperature (°C)	-75~190														
Rated Voltage(V)	300														
Product Standard Certification															
Flammability Test	FT1														
Construction															
Conductor	Silver plated copper														
AWG	20														
Conductor Dia. (±0.005mm)	19/0.20														
Jacket	PTFE														
Average Thickness(mm)	0.13														
Outer Dia.(±0.05mm)	1.30														
Color															
As request															
Marking															
PAC 20AWG 300V 190°C															
Revision History															
	Mechanical Characteristics: <table border="1"> <tr> <td>Test Object</td> <td>Jacket</td> </tr> <tr> <td>Test Material</td> <td>PTFE</td> </tr> <tr> <td>Before Tensile Strength (kgf/mm²)</td> <td>>=0.5</td> </tr> <tr> <td>Aging Elongation (%)</td> <td>>=100</td> </tr> <tr> <td>Aging Condition ()</td> <td></td> </tr> <tr> <td>After Tensile Strength (%)</td> <td>>=60</td> </tr> <tr> <td>Aging Elongation (%)</td> <td>>=60</td> </tr> </table>	Test Object	Jacket	Test Material	PTFE	Before Tensile Strength (kgf/mm ²)	>=0.5	Aging Elongation (%)	>=100	Aging Condition ()		After Tensile Strength (%)	>=60	Aging Elongation (%)	>=60
Test Object	Jacket														
Test Material	PTFE														
Before Tensile Strength (kgf/mm ²)	>=0.5														
Aging Elongation (%)	>=100														
Aging Condition ()															
After Tensile Strength (%)	>=60														
Aging Elongation (%)	>=60														

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [pan-asia](#) manufacturer:

Other Similar products are found below :

[Pan-Asia](#)