

2 mm dia. SERIES

PATCH CORDS

This series comprises :

- **BLM patch cords** Moulded miniature extension patch cords
- **BLDM patch cords** Moulded miniature stackable patch cords

Each plug is soldered onto the cable in order to assure an excellent electrical connection with very stable transfer resistance.

CHARACTERISTICS

- Current rating max <i>PVC cable 0.3 mm² section</i>	: 5 A (at 20°C)
- Dielectric withstanding voltage	: 1 500 V rms 50 Hz
- Operating voltage	: 750 V rms 50 Hz
- Insulation resistance	: $\geq 5\ 000\ M\Omega$
- Mechanical endurance	: $\geq 10\ 000$ matings
- Average insertion loss	: 14 N
- Operating temperature	: - 40°C + 70°C

► Packaging : 10 identical patch cords.

• BLM EXTENSION PATCH CORDS

Cord length	Colour
1 : 10 cm	0 : Black
2 : 20 cm	1 : Red
4 : 50 cm	2 : Green
5 : 100 cm	3 : Blue
	4 : Yellow


R 928 0XX



• BLDM STACKABLE PATCH CORDS

Cord length	Colour
1 : 10 cm	0 : Black
2 : 20 cm	1 : Red
4 : 50 cm	2 : Green
5 : 100 cm	3 : Blue
	4 : Yellow

R 928 1XX

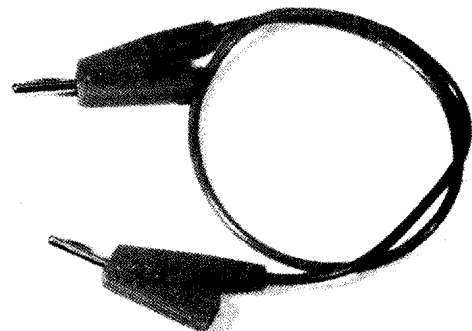

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [radiall](#) manufacturer:

Other Similar products are found below :

[F760858219](#) [8959-1511-004](#) [5919-1503-000](#) [7101-1541-010](#) [7105-1561-010](#) [MD11-035](#) [81-6201-0450](#) [9074-9513-000](#) [9620-9003-151](#)
[R113425097](#) [R114305000W](#) [R124075210](#) [R125055000](#) [R125512000W](#) [R141154000W](#) [R141572000](#) [R143012000](#) [R143235161W](#)
[R166268000](#) [R176019000](#) [R191841001W](#) [R282102000](#) [R282744220](#) [R282918120](#) [R404770000](#) [R414430150](#) [R414520150](#) [R433514700](#)
[R570022105](#) [R570123005](#) [R570363010](#) [R570442000](#) [R570E52010](#) [R574402410](#) [R585423230](#) [R114425000](#) [R124510000](#) [R125052500](#)
[R125320020W](#) [R141331500W](#) [R162017000W](#) [R176404000](#) [R191970091](#) [R282120010](#) [R282750000](#) [R317270000](#) [R404110150](#)
[R404280150](#) [R404755000](#) [R413210150](#)