


## BALF-NRG-02D3

# 50 ohm nominal input / conjugate match to BlueNRG tranceiver, with integrated harmonic filter

Datasheet - production data



#### Features

- 50 Ω nominal input / conjugate match to BlueNRG device
- Low insertion loss
- Low amplitude imbalance
- Low phase imbalance

#### **Benefits**

- Small footprint
- RF BOM reduction
- High RF performance


#### **Applications**


- Bluetooth low energy impedance matched balun filter
- Optimized for ST BlueNRG RFIC

### Description

This device is an ultra-miniature balun which integrates matching network and harmonics filter. Matching impedance has been customized for the BlueNRG ST transceiver. The BALF-NRG-02D3 uses STMicroelectronics IPD technology on non-conductive glass substrate which optimizes RF performance.

Figure 1: Pin configuration (bump view)



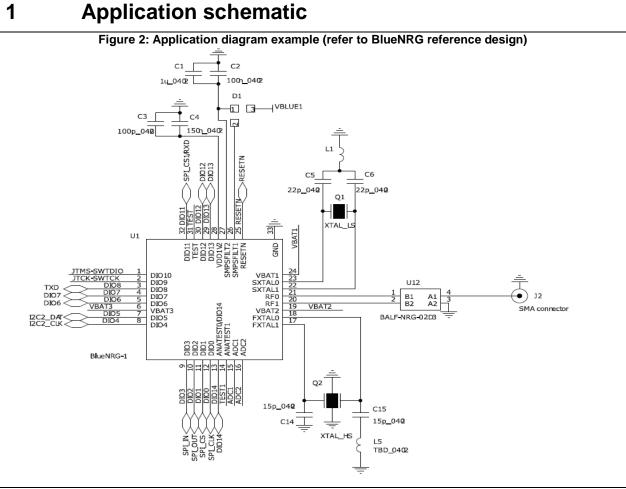

### **Application schematic**




### 2 Characteristics


Symbol	Parameter	Value			Unit	
		Min.	Тур.	Max.	onit	
Pin	Input power RFIN		-	10	dBm	
V <sub>ESD</sub>	ESD ratings human body model, all I/O one at a time while others connected to GND	2000	-		V	
	ESD ratings machine model (MM: C = 200 pF, R = 25 $\Omega$ , L = 500 nH)	200	-			
TOP	Operating temperature	-40	-	+105	°C	


#### Table 1: Absolute maximum ratings (limiting values)

Symbol	Definition	Value			11:::4
	Definition		Тур.	Max.	Unit
Z <sub>diff</sub>	Nominal differential impedance	Match to BlueNRG		Ω	
Zant	Nominal antenna impedance		50		Ω
f	Frequency range (bandwidth)			2500	MHz
١L	Insertion loss in bandwidth		1.33	1.85	
RLSE	Single ended return loss in bandwidth	21	30		
RLDIFF	Differential return loss in bandwidth	17	19		
H2	Second harmonic attenuation (differential mode)	40	49		
H3	Third harmonic attenuation (differential mode)	46	55		dB
H4	Fourth harmonic attenuation (differential mode)	42	50		
H5	Fifth harmonic attenuation (differential mode)	31	56		
H6	Fifth harmonic attenuation (differential mode)	29	45		
H7	Fifth harmonic attenuation (differential mode)	30	42		
$\Phi_{\text{imb}}$	Output phase imbalance		0	3.5	o
Aimb	Output amplitude imbalance	-1	0	1	dB



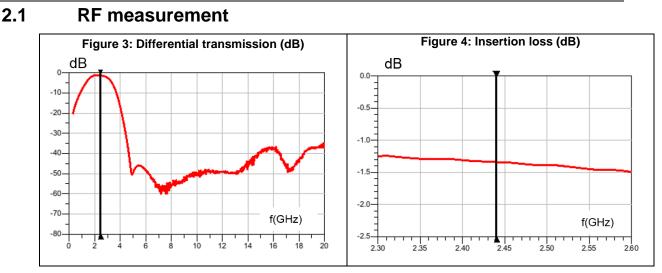

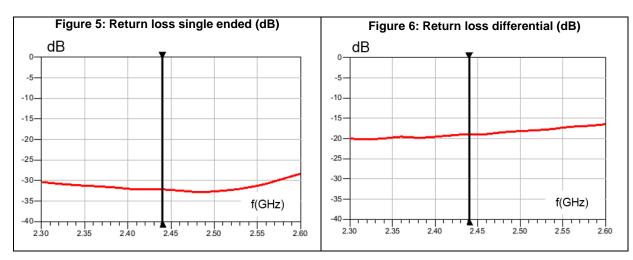

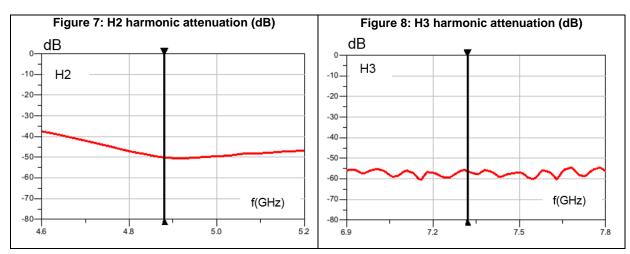



DocID030797 Rev 1




#### BALF-NRG-02D3

#### Characteristics

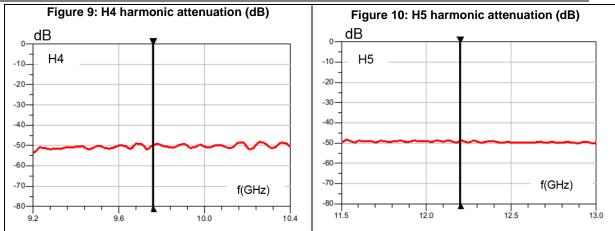

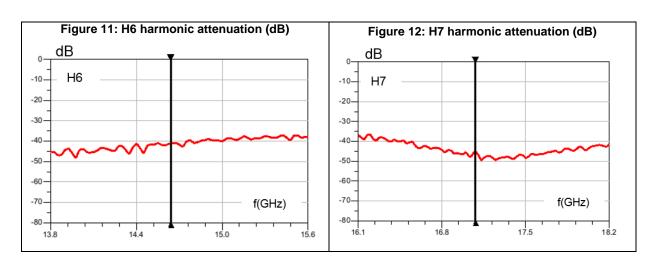


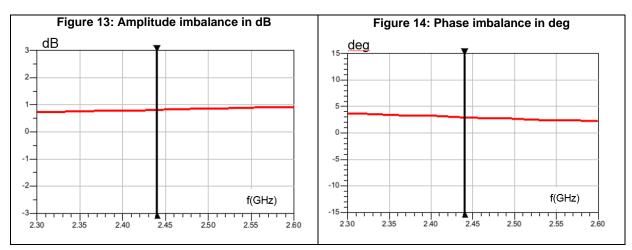



### **3** Application information

### 3.1 BALF-NRG-02D3 with BlueNRG

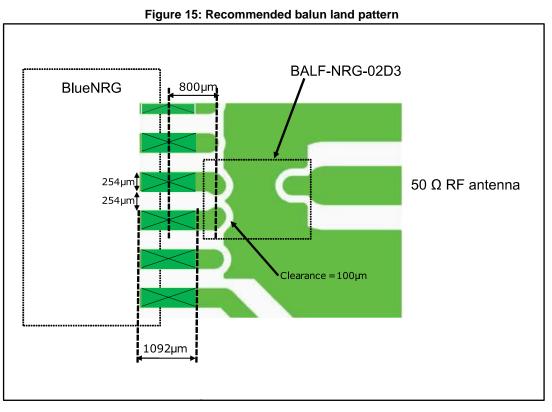



### 4 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK<sup>®</sup> packages, depending on their level of environmental compliance. ECOPACK<sup>®</sup> specifications, grade definitions and product status are available at: *www.st.com*. ECOPACK<sup>®</sup> is an ST trademark.

### 4.1 CSPG 0.4 package information


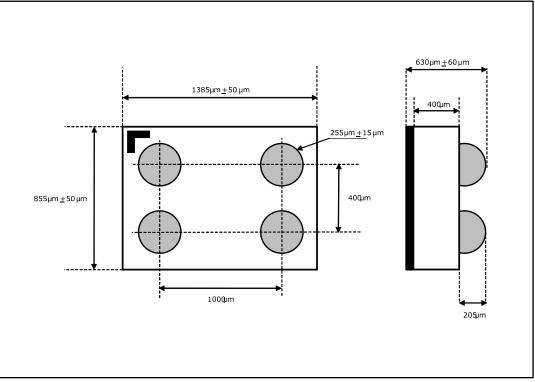


Figure 16: CSPG package outline (bump view)



#### Package information


#### BALF-NRG-02D3

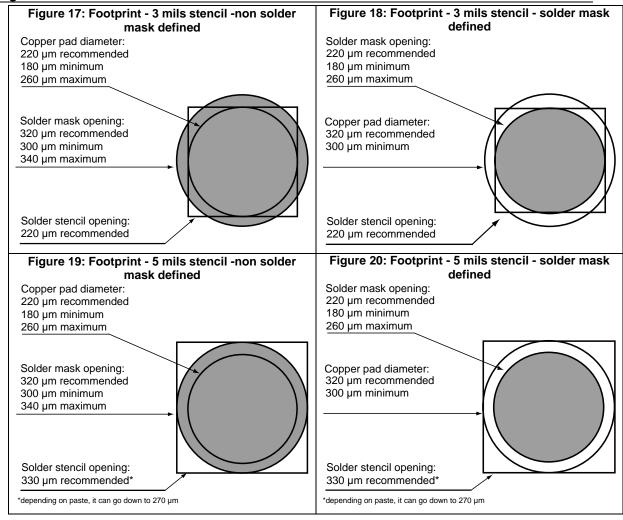





#### Package information

### 4.2 CSPG 0.4 packing information

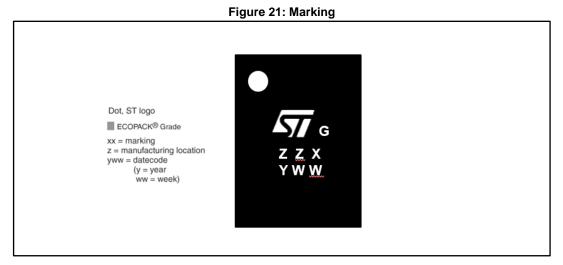



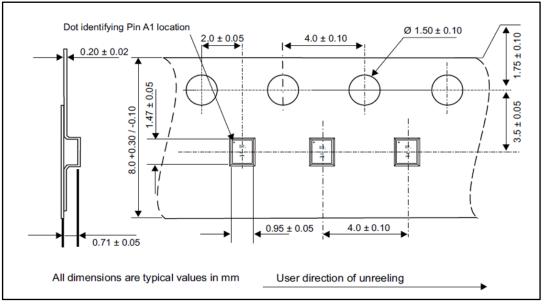




More packing information is available in the application note:

AN2348 Flip-Chip: "Package description and recommendations for use"



### 5 Ordering information

Figure 23: Ordering information scheme

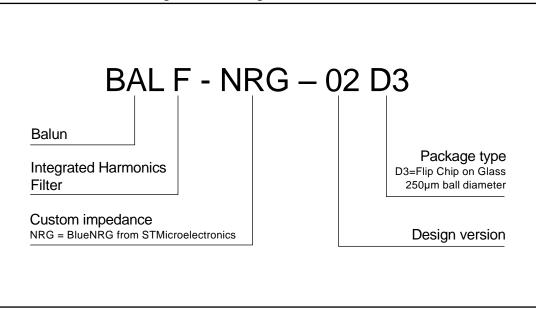

**Table 4: Ordering information** 

Order code	Marking	Package	Weight	Base qty.	Delivery mode
BALF-NRG-02D3	TK	CSPG	1.37 mg	5000	Tape and reel

### 6 Revision history

#### Table 5: Document revision history

Date	Revision	Changes
23-Jun-2017	1	Initial release.

57

#### BALF-NRG-02D3

#### IMPORTANT NOTICE - PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2017 STMicroelectronics - All rights reserved



### **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Signal Conditioning category:

Click to view products by STMicroelectronics manufacturer:

Other Similar products are found below :

MAPDCC0001 MAPDCC0004 PD0409J5050S2HF 880157 HHS-109-PIN DC1417J5005AHF AFS14A30-2185.00-T3 AFS14A35-1591.50-T3 DS-323-PIN B39321R801H210 1A0220-3 JP510S LFB212G45SG8C341 LFB322G45SN1A504 LFL182G45TC3B746 SF2159E 30057 FM-104-PIN CER0813B MAPDCC0005 3A325 40287 41180 ATB3225-75032NCT BD0810N50100AHF BD2425J50200AHF C5060J5003AHF JHS-115-PIN JP503AS DC0710J5005AHF DC2327J5005AHF DC3338J5005AHF 43020 LFB2H2G60BB1C106 LFL15869MTC1B787 X3C19F1-20S XC3500P-20S 10013-20 SF2194E CDBLB455KCAX39-B0 TGL2208-SM, EVAL RF1353C PD0922J5050D2HF 1E1305-3 1F1304-38 1G1304-30 B0922J7575AHF 2020-6622-20 TP-103-PIN BD1222J50200AHF