


2 x 180 W / 1 x 300 W PWM digital input power amplifier with built-in diagnostics features and step-up driver

Data brief - production data

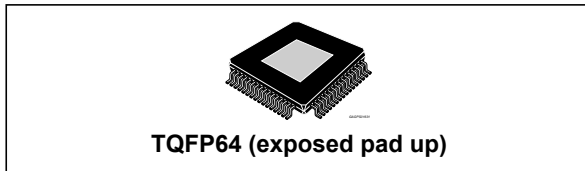

Features

- Integrated 105 dB D/A conversion
- I²S & TDM digital input (3.3/1.8 V)
- Input sampling frequency: 44.1kHz, 48 kHz, 96 kHz, 192 kHz
- Step-up driver included
- EMI control for FM/AM compatibility
- Dithering possibility
- Capable to operate down to 6 V (e.g. "start-stop")
- 6 V - 35 V operating range ($R_L = 8 \Omega$)
- Low component count output low-pass filter
- Output low-pass filter included in the feedback
- Low radiation function (LRF)
- High output power capability
 - 2 x 80 W/4 Ω @ 25 V, 1 kHz, 10 % THD
 - 2 x 120 W/4 Ω @ 30 V, 1 kHz, 10 % THD
 - 1 x 150 W/2 Ω @ 25 V, 1 kHz, 10 % THD
- Full I²C bus driving (3.3/1.8 V):
 - I²C bus digital diagnostics (including DC and AC load detection); AC and DC loudspeaker diagnostic
- Very flexible fault detection through integrated diagnostic
- Protected against several kinds of misconnections
- Offset detector (play or mute mode)
- Two independent short circuit protections
- Clipping detector
- C-MOS compatible enable pin (3.3/5 V)
- ESD protection
- Package: TQFP64 exposed pad up

Description

The FDA2100LV is a new BCD technology dual bridge class D amplifier, specially intended for car radio applications.

Thanks to the BCD6-SOI (Silicon On Insulation) technology it is possible to integrate a high performance D/A converter together with powerful MOSFET output amplifier working in class D, to get outstanding efficiency with respect to the standard class AB.

The D/A conversion on board allows the performance to reach an outstanding 110 dB S/N ratio with 105 dB of dynamic range. The feedback loop includes the output L-C low-pass filter, allowing superior frequency response linearity and lower distortion independently of the inductor and capacitor quality.

A full diagnostics array communicates the status of each speaker through the I²C bus. The possibility to control the device by means of the I²C bus makes FDA2100LV very flexible.

Thanks to the solutions implemented to solve the EMI problems, the device can be used in the standard single DIN car-radio box together with the tuner.

A built-in step-up driver allows up to 150 W output power with the standard 14 V supply voltage.

The FDA2100LV is moreover compliant to the most recent OEM specifications for low voltage operation (so called 'start-stop' battery profile during engine stop), helping car manufacturers to reduce the overall emissions and thus contributing to environment protection.

Table 1. Device summary


Order code	Package	Packing
FDA2100LV	TQFP64 (e.p.u.)	Tray
FDA2100LV-T		Tape & reel

Contents

1	Block diagram and pins description	3
2	Device overview	6
3	Package information	7
4	Revision history	8


1 Block diagram and pins description

Figure 1. Block diagram

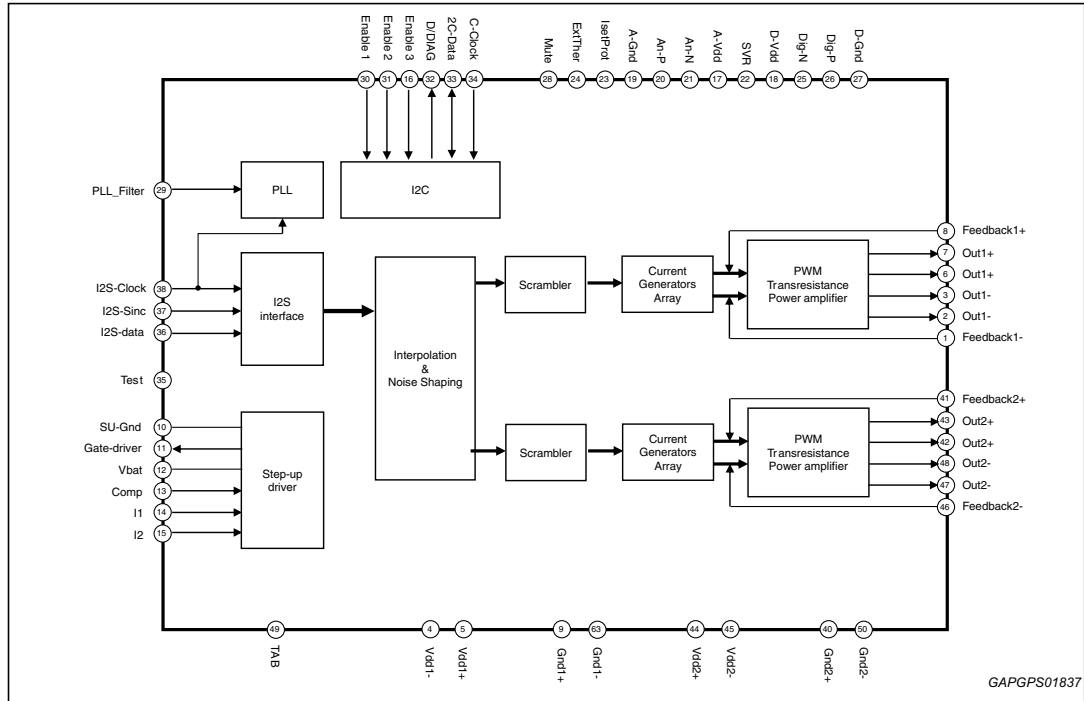

GAPGPS01837

Figure 2. Pins connection diagram (top view)

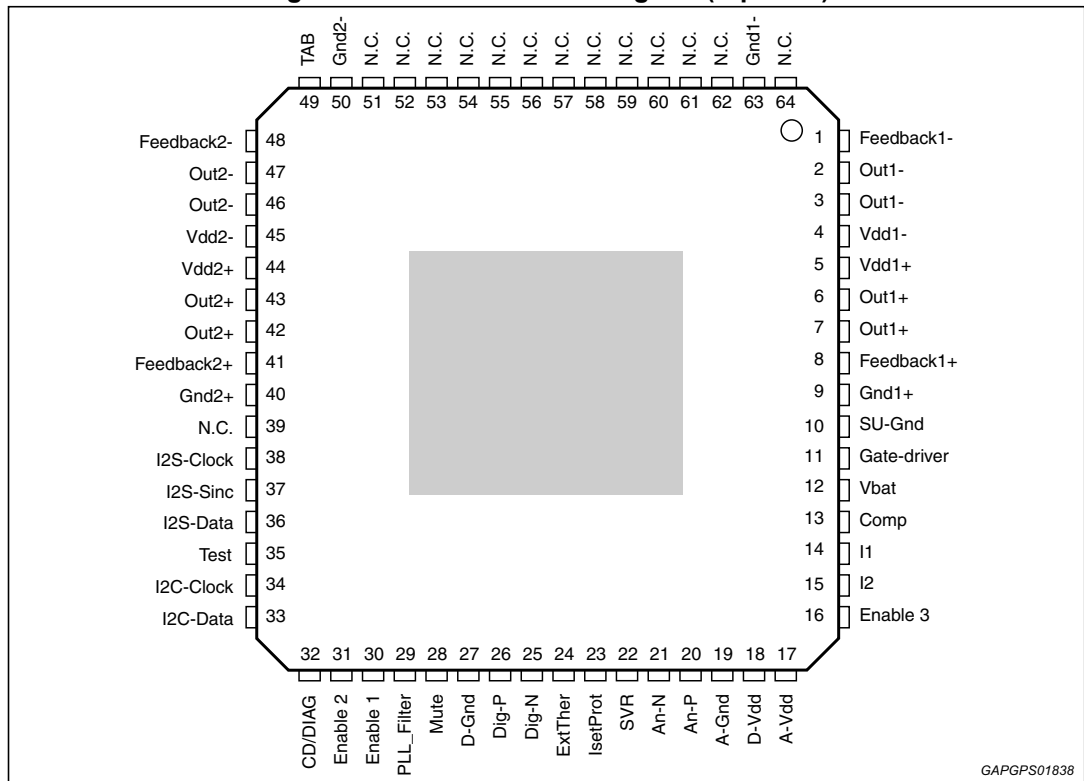

GAPGPS01838

Table 2. Pins list description

Pin #	Pin name	Function
64	N.C.	Not connected
63	Gnd1-	Channel 1, half bridge power ground -
51-62	N.C.	Not connected
50	Gnd2-	Channel 2, half bridge power ground -
49	TAB	TAB connection
48	Feedback2-	Channel 2 half bridge feedback -
47	Out2-	Channel 2 half bridge output -
46	Out2-	Channel 2 half bridge output -
45	Vdd2-	Channel 2 half bridge power supply -
44	Vdd2+	Channel 2 half bridge power supply +
43	Out2+	Channel 2 half bridge output +
42	Out2+	Channel 2 half bridge output +
41	Feedback2+	Channel 2 half bridge feedback +
40	Gnd2+	Channel 2, half bridge power ground +
39	N.C.	Not connected
38	I2S-Clock	I2S/TDM clock Input
37	I2S-Sinc	I2S/TDM sinc Input
36	I2S-Data	I2S/TDM data Input
35	Test	Test pin (do not use)
34	I2C-Clock	I2C data Clock
33	I2C-Data	I2C data input
32	CD/DIAG	Clip detector and diagnostic output: over-current protection, thermal warning, offset detection
31	Enable 2	Chip enable 2
30	Enable 1	Chip enable 1
29	PLL_Filter	PLL filter network
28	Mute	Mute input (6 μ A source current)
27	D-Gnd	Digital ground
26	Dig-P	Positive digital supply V(svr)+1.65 (internally generated)
25	Dig-N	Negative digital supply V(svr)-1.65 (internally generated)
24	ExtTher	External thermal protection input
23	IsetProt	Current protection resistor setting
22	SVR	Supply voltage ripple rejection capacitor
21	An-N	Negative analog supply V(svr)-1.65 (internally generated)
20	An-P	Positive analog supply V(svr)+1.65 (internally generated)

Table 2. Pins list description (continued)

Pin #	Pin name	Function
19	A-Gnd	Analog ground
18	D-Vdd	Digital power supply
17	A-Vdd	Analog power supply
16	Enable 3	Chip enable 3
15	I2	Step-up current limiting reference
14	I1	Step-up current limiting input
13	Comp	Step-up compensation input
12	Vbat	Power supply (battery)
11	Gate-driver	External PowerMOS gate drive output
10	SU-Gnd	Step-up power ground
9	Gnd1+	Channel 1, half bridge power ground +
8	Feedback1+	Channel 1 half bridge feedback +
7	Out1+	Channel 1 half bridge output +
6	Out1+	Channel 1 half bridge output +
5	Vdd1+	Channel 1 half bridge power supply +
4	Vdd1-	Channel 1 half bridge power supply -
3	Out1-	Channel 1 half bridge output -
2	Out1-	Channel 1 half bridge output -
1	Feedback1-	Channel 1 half bridge feedback -

2 Device overview

The FDA2100LV is a fully digital single chip class D amplifier with high immunity to the demodulation filter effects, built-in diagnostic functions and step-up driver. The high integration level and the on-board signal processing allow an excellent audio performance to be achieved. Thanks to the digital input and a feedback strategy in the power stage that make the amplifier robust with respect to the output filter non-idealities, the number and size of the external components are minimized.

Differently from the typical PWM switching amplifiers, a new feedback technique is adopted by FDA2100LV. The LC filter is included in the feedback loop making the amplifier highly insensitive to the characteristics of such a demodulator group. This solution optimizes the system performance in terms of THD and frequency response. Regardless of the big phase shifting introduced by the output filter the device shows a great phase margin for any load condition.

A number of features has also been included to reduce EMI, making the system compliant with the stringent limits typical of automotive applications and the fully digital approach provides a strong GSM immunity.

The FDA2100LV includes digital I²C and I²S interfaces, internal 20 bits DAC conversion, digital signal processing for interpolation and noise shaping, step-up driver, internal PLL for a pure clock generation and self diagnostic functions and automatic detection of wrong load connections or variation of the load with respect to the expected one.

In particular, considering diagnostic feature, the FDA amplifiers family provides different functions to detect several possible fault conditions. Any warning information will be stored in the I²C interface and kept until the first I²C bus reading operation. The main FDA2100LV's diagnostic features are the following ones:


- Load detection
- Under/over voltage events
- Chip over temperature
- Digital input offset
- Output clipping
- Over temperature of an external component (i.e. step-up DMOS) through a suitable NTC external sensor
- Output current digital acquisition

3 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: www.st.com.

ECOPACK® is an ST trademark.

Figure 3. TQFP64 (exposed pad up) mechanical data and package dimensions

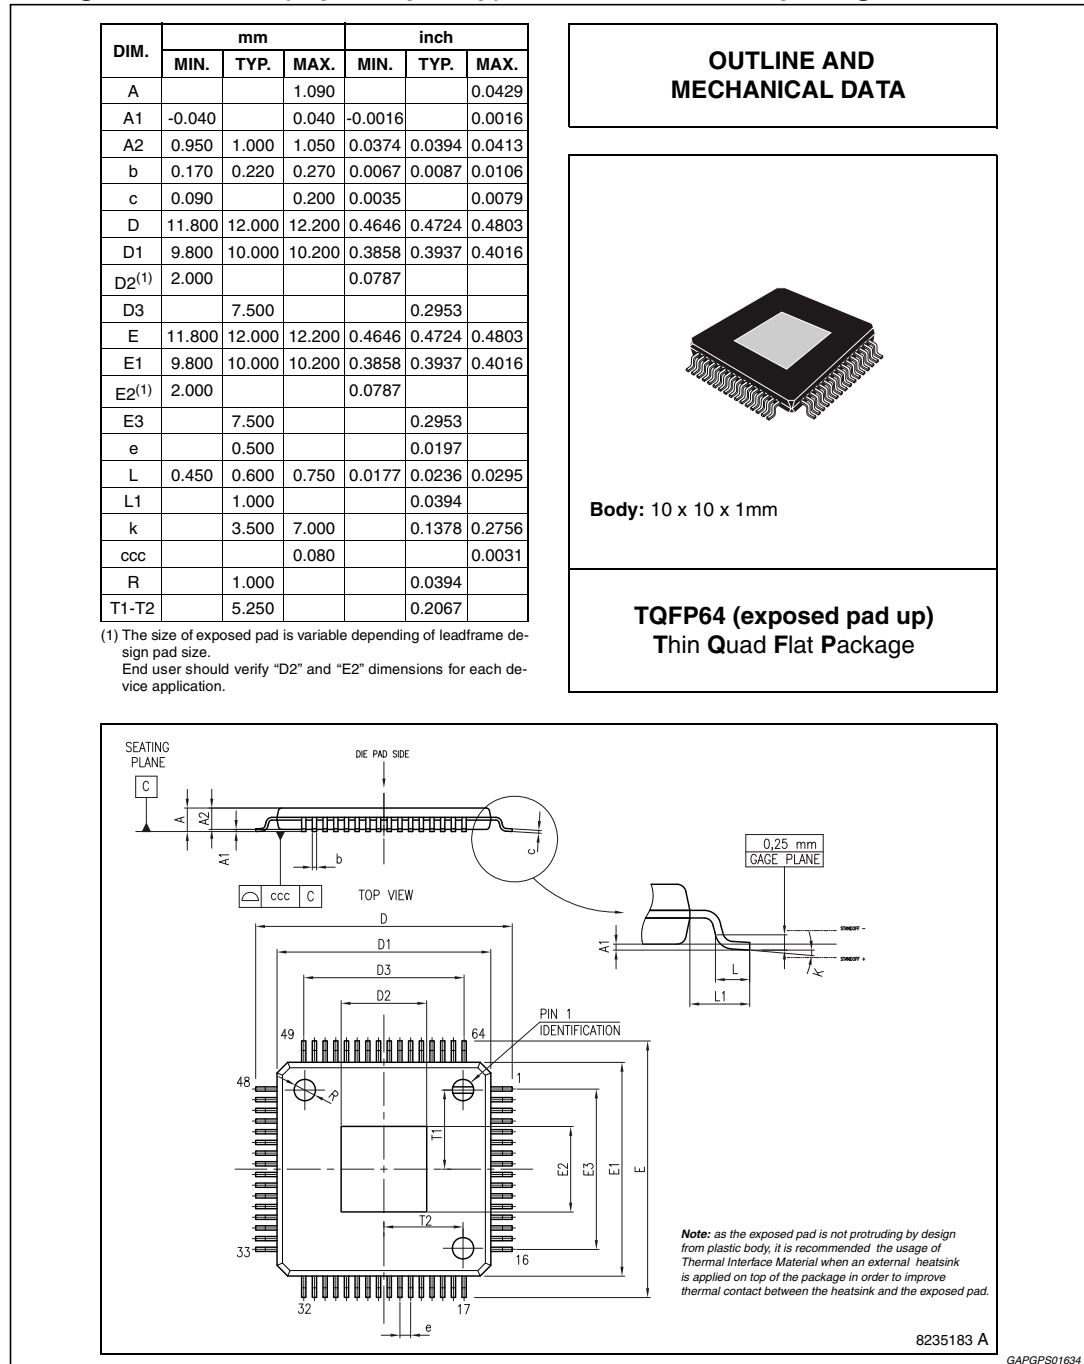

4 Revision history

Table 3. Document revision history

Date	Revision	Changes
11-Oct-2013	1	Initial release.

Please Read Carefully:

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

ST PRODUCTS ARE NOT DESIGNED OR AUTHORIZED FOR USE IN: (A) SAFETY CRITICAL APPLICATIONS SUCH AS LIFE SUPPORTING, ACTIVE IMPLANTED DEVICES OR SYSTEMS WITH PRODUCT FUNCTIONAL SAFETY REQUIREMENTS; (B) AERONAUTIC APPLICATIONS; (C) AUTOMOTIVE APPLICATIONS OR ENVIRONMENTS, AND/OR (D) AEROSPACE APPLICATIONS OR ENVIRONMENTS. WHERE ST PRODUCTS ARE NOT DESIGNED FOR SUCH USE, THE PURCHASER SHALL USE PRODUCTS AT PURCHASER'S SOLE RISK, EVEN IF ST HAS BEEN INFORMED IN WRITING OF SUCH USAGE, UNLESS A PRODUCT IS EXPRESSLY DESIGNATED BY ST AS BEING INTENDED FOR "AUTOMOTIVE, AUTOMOTIVE SAFETY OR MEDICAL" INDUSTRY DOMAINS ACCORDING TO ST PRODUCT DESIGN SPECIFICATIONS. PRODUCTS FORMALLY ESCC, QML OR JAN QUALIFIED ARE DEEMED SUITABLE FOR USE IN AEROSPACE BY THE CORRESPONDING GOVERNMENTAL AGENCY.

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2013 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Audio Amplifiers](#) category:

Click to view products by [STMicroelectronics](#) manufacturer:

Other Similar products are found below :

[LV47002P-E](#) [NCP2811AFCT1G](#) [NCP2890AFCT2G](#) [SSM2377ACBZ-R7](#) [IS31AP4915A-QFLS2-TR](#) [TDA1591T](#) [TDA7563AH](#)
[SSM2529ACBZ-R7](#) [SSM2518CBZ-R7](#) [MAX9890AETA+T](#) [TS2012EIJT](#) [NCP2809BMUTXG](#) [NJW1157BFC2](#) [SSM2375CBZ-REEL7](#)
[IS31AP4996-GRLS2-TR](#) [STPA002OD-4WX](#) [NCP2823BFCT1G](#) [MAX9717DETA+T](#) [MAX9717CETA+T](#) [MAX9724AEBC+TG45](#)
[LA4450L-E](#) [IS31AP2036A-CLS2-TR](#) [MAX9723DEBE+T](#) [TDA7563ASMTR](#) [AS3561-DWLT](#) [SSM2517CBZ-R7](#) [MP1720DH-12-LF-P](#)
[SABRE9601K](#) [THAT1646W16-U](#) [MAX98396EWB+](#) [PAM8965ZLA40-13](#) [BD37532FV-E2](#) [BD5638NUX-TR](#) [BD37512FS-E2](#) [BD37543FS-](#)
[E2](#) [BD3814FV-E2](#) [TPA3140D2PWPR](#) [TS2007EIJT](#) [IS31AP2005-DLS2-TR](#) [SSM2518CPZ-R7](#) [AS3410-EQFP-500](#) [FDA4100LV](#)
[TS4994EIJT](#) [NCP2820FCT1G](#) [NCP2823AFCT2G](#) [NCS2211MNTXG](#) [CPA2233CQ16-A1](#) [OPA1604AIPWR](#) [TDA7492](#) [SSM2519ACBZ-R7](#)