




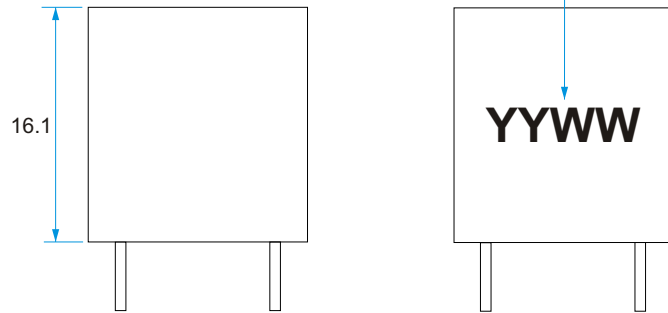



Marking:
White ink printed on to top of box
or black print on self adhesive label

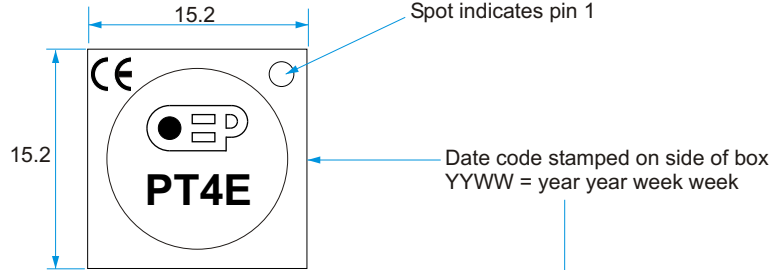

Pin diameter: 0.7mm
Tolerance on all dimensions: +/- 0.2mm unless stated otherwise

Materials:


- Bobbin: FR530 UL file number E69578(M) or 'Polyplastics Co. Ltd Material name: 1140 A(C) UL file no. E109088(M)
- Potting box: Material: FR530, UL file no. E69578(M) or 'Polyplastics Co. Ltd Material name: 1140 A(C) UL file no. E109088(M)
- Resin: 2-part epoxy resin type 3300A and 3300B UL file number 218090
- Winding wire: Enamel coated copper wire UL file no. E174837
- Tape: 3M number 56 or JingJiang Yahua UL file: E165111 or equivalent

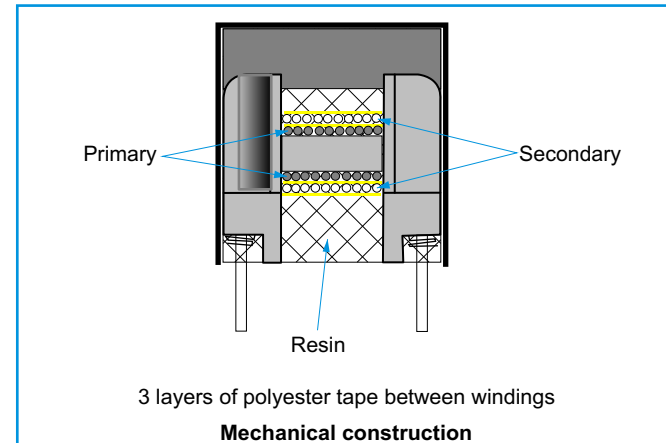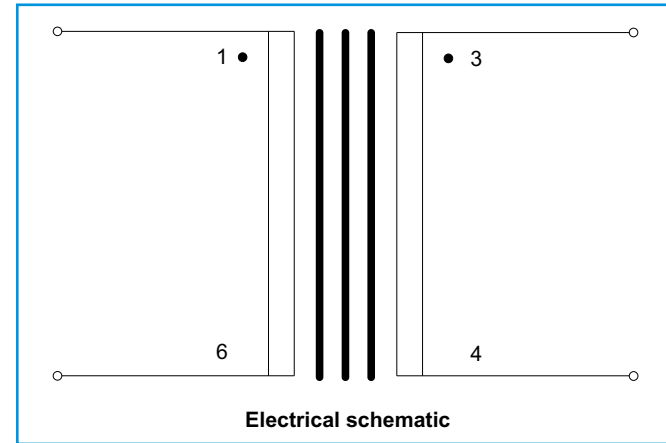

Electrical specification:

- Turns ratio: 1:1
- Primary inductance: 3mH min. @ 1kHz, 0.27V (series equivalent circuit)
- Primary DC resistance: 0.76 +/- 10%
- Secondary DC resistance: 1.01 +/- 10%
- Interwinding capacitance: 20pF (nom.)
- Primary leakage inductance: 19uH (nom.)
- Proof voltage (primary to secondary): 2kV rms
- Voltage - Time product: 200VuS
- Max. pulse current: 200mA (peak)
- Bandwidth: 3kHz - 1MHz

Operating temperature range: -40°C to +70°C
Storage temperature range: -40°C to +125°C




Walters Group Holdings Ltd.
Unit 5, Oxonian Park, Langford Locks,
Kidlington, Oxfordshire. OX5 1FP
Tel: (01865) 855085 Fax: (01865) 855075
Website: www.oep.co.uk

DESCRIPTION	ISSUE	DATE	DRAWN	CHECKED	DRAWING NUMBER
Specification for PT4E	1	08/04/04	CS		PT4E
	4	28/06/07	CS		
	5	05/09/08	CS		
	6	18/10/13	CS		

Scale: 2 to 1

All dimensions in mm unless stated otherwise



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [oep](#) manufacturer:

Other Similar products are found below :

[016608F](#) [PT4](#) [PT8](#) [E187B](#) [PT42E](#) [TF048](#) [Z1604](#) [P1200](#)